


Hardiplank® Lap Siding

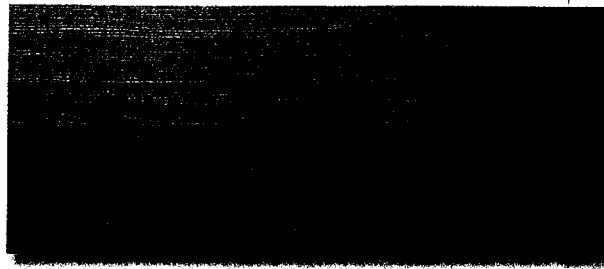

Select Cedarmill®

SPECIFICATIONS

Select Cedarmill and Smooth Planks (not shown)

Thickness:	5/16"
Weight:	2.3 lbs./sq.ft.
Length:	12' planks
Widths:	5 1/4" (4" exposure)
	6 1/4" (5" exposure)
	7 1/4" (6" exposure)
	8 1/4" (7" exposure)
	9 1/4" (8" exposure)
	12" (10 3/4" exposure)

PRODUCT SPECIFICATIONS

BASIC COMPOSITION/SIZE

Portland cement, ground sand, cellulose fiber, select additives and water. James Hardie® siding products contain no asbestos, glass fibers or formaldehyde.

APPROVALS

Hardiplank® lap siding, Hardipanel® siding, Hardisoffit® panels and Hardishingle® siding are recognized as exterior claddings in National Evaluation Service (NES), Inc., Report No. NER-405; City of Los Angeles, Research Report No. 24862; Texas Department of Insurance Product Evaluation EC23, United States Department of Housing and Urban Development, Materials Release 1263c; California DSA Product Acceptance Number PA-019; and City of New York MEA No. 223-93-M. Hardiplank lap siding and Hardishingle cladding shingles are recognized as exterior cladding in CCMC Evaluation Report 12678-R. These documents must also be consulted for additional information concerning the suitability of this product for specific applications.

DURABILITY

James Hardie siding products are dimensionally stable and most have a limited, transferable warranty for 50 years to resist cracking, rotting and delamination. James Hardie fiber-cement products resist damage caused by extended exposure to moisture, humidity, and salt air.

FLEXURAL STRENGTH

James Hardie siding and soffit products comply with ASTM C1186, Standard Specification for Grade II, Type A, Non-Asbestos Fiber-Cement Flat Sheets.

NON-COMBUSTIBILITY

Hardiplank, Hardipanel, Hardishingle and Hardisoffit weatherboard products have been evaluated in accordance with ASTM Method E-136 and evaluated for compliance with (CAN/ULC-S114) and may be installed where non-combustible construction is required.

SURFACE BURNING CHARACTERISTICS


When tested in accordance with ASTM test method E-84 and evaluated for compliance with (CAN/ULC-S102), the product is recognized to have the following properties:

Flame Spread	0	(≤5)
Fuel Contribution	0	
Smoke Developed	5	(≤10)

Full specifications conforming to CSI guidelines can be downloaded from www.jameshardie.com or received via fax from Fax-on-Demand 1-800-9HARDIE, document #2170.

Please call 1-800-9HARDIE for installation instructions and safe handling information.

Customer Service 1 866-4HARDIE (866-442-7343)
Technical Support 1 888- JHARDIE (888-542-7343)
Website: www.jameshardie.com/architect.htm

 **James Hardie®
Building Products**
26300 La Alameda, Suite 250
Mission Viejo, CA 92691

A full Product and Technical Information CD-ROM on our entire product line is available by calling 1-888-JHARDIE

See us in



Sweets Catalog 2003

©2003 James Hardie® Building Products, Inc. All Rights Reserved. Printed in the U.S.A.
™, ®, and © denote trademarks and copyrights owned by James Hardie Research Pty Limited ACN 066 114 092. JH91668SL 6/03

COVERAGE:

3000 SQ FEET TO BE APPLIED TO ALL SIDES OF BUILDING.

SIDING PLAN