



Wall Mounted High-SEER 9, 12 and 15,000 BTU Systems

Systems 9RLS3, 12RLS3, 15RLS3



Up to 33.0 SEER



Indoor Models
ASU9RLS3
ASU12RLS3
ASU15RLS3



Outdoor Models
AOU9RLS3
AOU12RLS3
AOU15RLS3

Energy Efficient

	9RLS3	12RLS3	15RLS3
SEER	33.0	29.3	25.3
EER	18.0	15.2	13.9
HSPF	14.2	14.0	13.4

World's Most Efficient Heat Pump



All systems feature high efficiencies and are **ENERGY STAR® Most Efficient 2015 Qualified**, meaning lower utility bills for home and business owners.


Rebates

To encourage customers to buy energy efficient products, many states and/or local utility companies offer significant rebates for the purchase of a ductless mini-split system. Go to Fujitsu's web site to search for local rebates, consumer loans and utility bill discounts. We provide a listing of rebates and offerings on qualifying Fujitsu mini-splits by state. www.fujitsugeneral.com/utility_rebates.htm



ESP Energy Saving Program

ESP knows how to save you money even when you forget. If you leave the room without turning the unit off, ESP knows that you left and 20 minutes later, set temperature is increased by 4°F when cooling and reduced by 8°F when heating. When you come back to the room, it returns to previous operating mode. This prevents wasteful operation to save energy without you having to think about it.

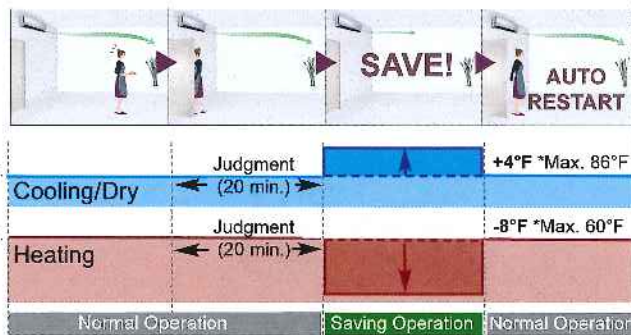

Power Diffuser



A power diffuser operates automatically in either heating or cooling mode to optimally control the airflow. A comfortable space is quickly achieved.



Cooling
During cooling mode, far reaching horizontal airflow quickly creates a comfortable space throughout the entire room.



Heating
During heating mode, vertical airflow provides comfortable floor level heating.



Standard Features

Wireless Remote Control	Economy Mode
Apple Catechin Filter	Energy Saving Program
Ion Deodorizing Filter	Quiet Mode (<i>Indoor</i>)
Sleep Timer	Low Noise Mode
24 Hour Timer	Auto Restart/Reset
Weekly Timer	Auto Changeover
Dry Mode	Low Ambient Cooling
Auto Louver: 4-Way	Cold Prevention
Auto Mode	Remote Temp. Sensor*
Powerful Operation Mode	3rd Party Device Control*


* Available only with optional wired remote controller and optional interface kit.
+ Available only with optional interface kit. Operation monitoring and On/Off control only.

Optional Accessories


- Wired Remote Controller: UTY-RVNUM
Backlit and includes room temperature
- Wired Remote Controller: UTY-RNNUM
- Simple Remote Controller: UTY-RSNUM
- Communication Kit: UTY-TWBXF1
- Dry Contact Wire Kit: UTY-XWZXZ5

Dimensions Inches (mm)

ASU9RLS3, ASU12RLS3, ASU15RLS3

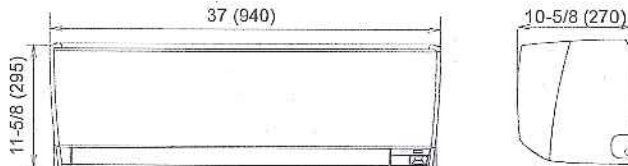

AOU9RLS3, AOU12RLS3, AOU15RLS3

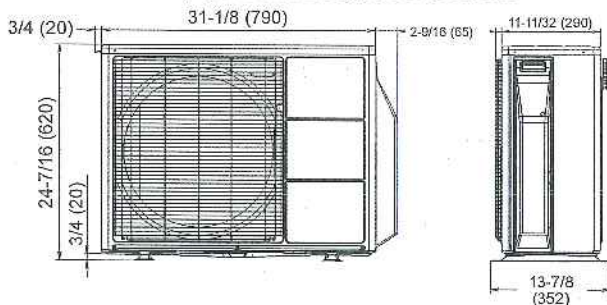

The Fujitsu logo is a registered trademark of Fujitsu Limited. The Halcyon logo and name is a trademark of Fujitsu General America, Inc. ENERGY STAR is a registered trademark of the EPA and DOE. Copyright 2015 Fujitsu General America, Inc.

Proper sizing and installation of equipment is critical to achieve optimal performance. Split system air conditioners and heat pumps must be matched with appropriate coil components to meet ENERGY STAR criteria. Ask your contractor for details or visit www.energystar.gov.

Fujitsu's products are subject to continuous improvements. Fujitsu reserves the right to modify product design, specifications and information without notice and without incurring any obligations.

	9RLS3 Heat Pump	12RLS3 Heat Pump	15RLS3 Heat Pump
Nominal Cooling BTU/h	9,000	12,000	14,500
Min.-Max. Cooling BTU/h	3,100~12,000	3,100~13,600	3,100~18,400
Nominal Heating BTU/h	12,000	16,000	18,000
Min.-Max. Heating BTU/h	3,100~22,000	3,100~22,100	3,100~23,900
HSPF BTU/hW	14.2	14.0	13.4
SEER BTU/hW	33.0	29.3	25.3
EER Clg/Htg	18.0	15.2	13.9
Clg. Operating Range °F(°C)	14~115 (-10~46)	14~115 (-10~46)	14~115 (-10~46)
Htg. Operating Range °F(°C)	-5~75 (-21~24)	-5~75 (-21~24)	-5~75 (-21~24)
Moisture Removal PL/h(Htg)	2.6 (1.2)	2.7 (1.3)	4.0 (1.9)
Voltage/Frequency/Phase	208-230/60/1	208-230/60/1	208-230/60/1
MAX.CRT.BKR (A)	15	15	20
Air Circ. C.F.M. (m ³ /h): Hi	489 (830)	489 (830)	489 (830)
Medium	400 (680)	400 (680)	459 (780)
Low	341 (580)	341 (580)	371 (630)
Quiet	224 (380)	224 (380)	Clg 259 (440) Htg 294 (500)
Noise Level dB(A) Clg/Htg: Hi	42/41	42/41	45/45
Medium	37/35	37/35	40/39
Low	32/31	32/31	34/33
Quiet	23/23	23/23	26/27
Outdoor Fan Speed RPM Clg/Htg	989/1,082	989/1,082	1,206/1,082
Outdoor Noise Level dB(A) Clg/Htg	42/47	43/47	49/50
Current Rated/Max (A): Cooling	2.5/9.4	3.8/9.4	4.8/9.9
Heating	3.3/10.0	4.7/11.9	5.2/13.9
Power Use Rated/Max (kW): Cooling	0.50/0.85	0.79/0.99	1.04/1.56
Heating	0.66/1.93	1.01/1.94	1.15/2.19
Fan Speeds Stage	4+Auto	4+Auto	4+Auto
Air Direction: Horizontal	Automatic	Automatic	Automatic
Vertical	Automatic	Automatic	Automatic
Air Filter	Washable	Washable	Washable
Connection Method	Flare	Flare	Flare
Combined Min. Lgth Ft (m)	10 (3)	10 (3)	10 (3)
Combined Max. Lgth Ft (m)	66 (20) (pre-charge: 49')	66 (20) (pre-charge: 49')	66 (20) (pre-charge: 49')
Max. Vertical Diff. Ft (m)	49 (15)	49 (15)	49 (15)
Conn. Pipe Diameter Inch	Suc.3/8 Dis.1/4	Suc.3/8 Dis.1/4	Suc.1/2 Dis.1/4
Net Weight lbs. (kg)	31 (14) 84 (38)	31 (14) 84 (38)	31 (14) 86 (39)
Dimensions: Height Inch	11-5/8 24-7/16	11-5/8 24-7/16	11-5/8 24-7/16
mm	295 620	295 620	295 620
Width Inch	37 31-1/8	37 31-1/8	37 31-1/8
mm	940 790	940 790	940 790
Depth Inch	10-5/8 11-7/16	10-5/8 11-7/16	10-5/8 11-7/16
mm	270 290	270 290	270 290
Refrigerant	R410A	R410A	R410A
Indoor ASU9RLS3	Indoor ASU12RLS3	Indoor ASU15RLS3	
Outdoor AOU9RLS3	Outdoor AOU12RLS3	Outdoor AOU15RLS3	

Note: Figures are based on 230 Volts.

