
SIEMENS



Remote LCD Annunciator for the FireSeeker FS-250 System ENGINEER AND ARCHITECT SPECIFICATIONS

• 4 x 20 Character Backlit Display

- System Status LEDs
- · Optional local sounder
- Built-in lamp test button
- Integral System Control Capabilities (with keyswitch)
- Integral System Maintenance access (with keyswitch and password)
- (I) UL Listed

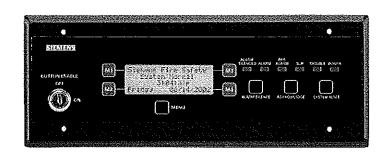

The Model FS-RD2 Remote Display is used for annunciating system events remotely from the fire alarm control panel on the FireSeeker FS-250 system. The FS-RD2 will mimic the system status LEDs and the 80-character event message found on the main system panel. The 4 x 20 LCD backlit display will illuminate upon receiving any event from the system, or upon pressing any button on the FS-RD2.

System Acknowledge, Silence and Reset Capabilities are available on the FS-RD2. The control functions must be enabled using the integral keyswitch. Up to sixteen supervised FS-RD2 annunciators can be used simultaneously on the FireSeeker FS-250 system.

Mounting is accomplished using a standard 6 gang 2" deep electrical box. The FS-RD2 requires a 2-wire data connection from the RS-485 port on the FS-250, as well as 24 VDC power. Maximum wire loop resistance is 25 ohms.

Ordering Information

Model Number	Description	Part Number
FS-RD2	Remote LCD display for the FS-250	500-648980

NOTICE: The use of other than Fire Safety detectors and bases with Fire Safety equipment will be considered a misapplication of Fire Safety equipment and as such voids all warranties either expressed or implied in regard to loss, damage, liabilities and/or service problems. Fire Safety 8 Fernwood Road Florham Park, NJ 07932 Tel: (973) 593-2600 FAX: (973) 593-6670 Website: www.sbt.siemens.com/fis Fire Safety 2 Kenview Boulevard Brampton, Ontario Canada L6T 5E4 Tel: (905) 799-9937 FAX: (905) 799-9858 1/04 5M SFS-IG Siemens Building Technologies January 2004 Supersedes sheet dated 6/93

Printed in U.S.A.

Fire Safety