

CA- SERIES

Exit Sign – LED – Cast Aluminum



CAST ALUMINUM HOUSING A BEAUTIFUL ARCHITECTURAL EXIT SIGN

An efficient and secure Exit Sign housed in a solid aluminum cast housing.

Faceplate includes knock-out left/right chevron arrows. Universal mounting kit allows top, lateral, or flush installation.


When ordering, specify housing color (aluminum, black, or white), lettering color (red or green illumination), and AC Only or Battery Backup (adds 4.8v 700mAh battery) configuration (Note: AC Only units are usually installed in a facility with a generator).

Features:

- Die-cast aluminum spec grade housing
- AC indicator light
- Single sided (Purchase additional faceplate for double-sided)
- UL listed for USA & Canada/ETL listed
- Push-to-test switch (Battery Backup configuration only)
- 120 or 277 VAC operation
- Listed for damp location
- Chevron style knock-out arrows
- Universal mounting canopy for top, side or flush mount installation
- Ni-cad 4.8v 700mAh battery provides 90 minute emergency run time (Battery Backup configuration only)

Dimensions:

Width: 12.75"
 Height: 8.5"
 Depth:
 single sided: 2"
 double sided: 2.25"

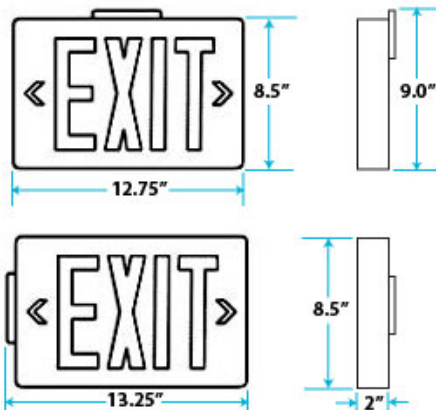

Shipping Weight each:
 Exit Sign 7 lbs / Faceplate 2 lbs

Catalog Code:

Configuration	AC Only	Battery Backup
Aluminum Housing-RED lettering	CA-ARAC	CA-AR
Aluminum Housing-GREEN lettering	CA-AGAC	CA-AG
Black Housing-RED lettering	CA-BRAC	CA-BR
Black Housing-GREEN lettering	CA-BGAC	CA-BG
White Housing-RED lettering	CA-WRAC	CA-WR
White Housing-GREEN lettering	CA-WGAC	CA-WG
Black Back-RED lettering	CA-ABGAC	CA-ABG
Black Back-GREEN lettering	CA-ABRAC	CA-ABR

Add an additional faceplate to make this a double-sided Exit Sign

Use Battery Backup catalog code (above, making sure to match the housing and color) and append "F" (i.e. CA-ARF or CA-WRF) for the code of the faceplate. To order a double sided Exit Sign use both codes (i.e. CA-AR + CA-CARF).

The contents of this datasheet are copyrighted and may not be reused without the express written permission of The Exit Light Company, Inc. ©2007 The Exit Light Co, Inc.

THE EXIT LIGHT COMPANY, INC.

3525 Del Mar Heights Rd, #304, San Diego, CA 92130
 760-598-3948 phone / 760-598-3941 fax
info@exitlightco.com • www.exitlightco.com
 revised 05.05.2009

