

## **GENERAL NOTES**


I. GC TO DEMO EXISTING SPACE AS REQUIRED TO ACCOMMODATE ALL NEW CONSTRUCTION.


TENANTS, ETC.) WHICH ARE ADJACENT TO THE CONSTRUCTION AREA.

- 2. IT IS THE GENERAL CONTRACTOR'S RESPONSIBILITY TO INSPECT THE ENTIRE PROJECT SPACE PRIOR TO BID TO BECOME AWARE OF ALL THE TYPES OF MATERIALS AND QUANTITIES OF SUCH THAT WILL HAVE TO BE REMOVED.
- 3. THE GC IS TO PROVIDE ADEQUATE PROTECTION FOR ALL EXISTING ELEMENTS (PUBLIC HALLWAYS, SURROUNDING
- 4. THE GC IS RESPONSIBLE FOR THE HANDLING AND DUMPING COSTS FOR THE REMOVAL OF ALL DEMOLISHED MATERIAL, TRASH AND REFUSE ACCUMULATED ON THE JOB SITE BY ALL SUBCONTRACTORS. THE G.C. IS RESPONSIBLE TO INSURE THAT THE SPACE AND ALL SURFACES ARE DISPOSED OF IN A SAFE AND LEGAL MANNER.
- THAT THE SPACE AND ALL SURFACES ARE DISPOSED OF IN A SAFE AND LEGAL MANNER.


  5. GENERAL CONTRACTOR IS RESPONSIBLE FOR VERIFYING LOCATION OF ALL EXISTING LIGHTING, HVAC EQUIPMENT, SPEAKERS, FIRE PROTECTION SYSTEMS, ELECTRICAL SYSTEMS, SECURITY SYSTEMS AND ALL OTHER EQUIPMENT. G.C. TO
- RELOCATE OF IN CONFLICT WITH NEW CONSTRUCTION.

  6. GENERAL CONTRACTOR IS TO CONTACT LINGLE DESIGN GROUP INC. FOR THE RESOLUTION OF ANY CONFLICTS OF INFORMATION ON DRAWINGS DURING DEMOLITION OR CONSTRUCTION DUE TO UNFORESEEN ELEMENTS.
- 7. GENERAL CONTRACTOR IS RESPONSIBLE FOR ANY PATCHING REQUIRED INSIDE ¢ OUTSIDE OF THE CONSTRUCTION AREA, WHERE AFFECTED BY DEMOLITION.
- 8. COORDINATION OF THE LOCATION OF DUMPSTER USED FOR REMOVAL OR DEMOLISHED MATERIAL WITH BUILDING MANAGEMENT IS THE RESPONSIBILITY OF THE LANDLORD.







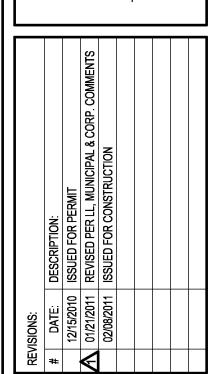

| PROJECT NUMBER: | 10-1033 |
|-----------------|---------|
| DRAWN BY:       | SR      |
| CHECKED BY:     | B\      |
|                 |         |

SHEET TITLE:

DEMOLITION

SHEET NUMBER:

D110