

FINISH SCHEDULE - PUBLIC SPACE

PAINT - CONTINUED

CODE:	FF&E ITEM #:	CSCI:	OSCI:	OSOI:	DESCRIPTION:	MANUFACTURER:	FINISH / COLOR:	LOCATION:	REMARKS / NOTES:
P-16		*			INDUSTRIAL ENAMEL Pro Industrial Zero-VOC FINISH: Acrylic Semi-Gloss	Sherwin Williams	SW 6257 Gibraltar	Stairwell (Handrails)	NOTE: (1) coat primer and (2) coats paint are required. NOTE: Paint draw down cards from a production batch to be approved by the owner's rep prior to ordering.
P-17		*			CONCRETE FLOOR PAINT *Call Sherwin Williams for Specifications	Sherwin Williams	Safety Yellow	Stairwell Steps (Edges of Top & Bottom Stair in EACH Run of Steps)	NOTE: (1) coat primer and (2) coats paint are required. NOTE: Paint draw down cards from a production batch to be approved by the owner's rep prior to ordering.
P-18		*			PAINT ProMar 200 Zero VOC FINISH: Latex Eggshell	Sherwin Williams	To Match: Ralph Lauren WW38 Egret White	Stairwell (Walls)	NOTE: (1) coat primer and (2) coats paint are required. NOTE: Paint draw down cards from a production batch to be approved by the owner's rep prior to ordering.
P-19		*			PAINT ProMar 200 Zero VOC FINISH: Latex Semi-Gloss	Sherwin Williams	SW 7004 Snowbound	Men's & Women's Restrooms (Ceilings for ALL Rooms Listed Above)	NOTE: (1) coat primer and (2) coats paint are required. NOTE: Paint draw down cards from a production batch to be approved by the owner's rep prior to ordering.

CSCI: Contractor Supplied, Contractor Installed
OSCI: Owner Supplied, Contractor Installed
OSOI: Owner Supplied, Owner Installed

PLASTIC LAMINATE


CODE:	FF&E ITEM #:	CSCI:	OSCI:	OSOI:	DESCRIPTION:	MANUFACTURER:	FINISH / COLOR:	LOCATION:	REMARKS / NOTES:
PL-1		*			PLASTIC LAMINATE Wood Grain	Wilsonart	Shaker Cherry 7935-07 Gloss Finish	BOH Areas: Employee Break Room (Upper & Base Cabinets) Guest Laundry (Counter Base)	
PL-2		*			PLASTIC LAMINATE	Wilsonart	Pewter Brush 4779-60 Matte Finish	BOH Areas: Sales Office Work Room (Countertops & Back Splashes for the Work Stations) Guest Laundry (Countertop)	
PL-3		*			PLASTIC LAMINATE	Wilsonart	Nepal Teak 7209-60 Matte Finish	Elevator Cab Guest Kitchen (Shelves at Upper Cabinets) Bar/Cafe (Shelves at Upper Cabinets) E Room (Desk) (Modesty Panel at Desk) Trash Station (Shelf over Main Counter)	
PL-4		*			PLASTIC LAMINATE Solid	Pionite	Tawny White SW812-S Suede	Public Restroom (Partitions) BOH Areas: Employee Break Area (Countertop & Back Splash) Elevator Cab (Ceiling Panel)	
PL-5		*			PLASTIC LAMINATE Wood Grain	Lamin-Art	Havana Walnut 3028-T Textured Finish	Meeting Rooms (Shelves at Open Cabinets)	
PL-6		*			MELAMINE Solid	J. Suss or Approved Alternate	White	Kitchen / Dining Bar/Cafe Meeting Room BOH Areas: Work Room Sales Room Employee Break Room (Interior of Cabinets)	NOTE: Not all cabinets will have a melamine interior. Refer to the millwork shop drawings for exact locations.
PL-7		*			MELAMINE Solid	J. Suss or Approved Alternate	Black	Host E Room (Interior of Host Stand & E Room Desk Cabinets)	NOTE: Not all cabinets will have a melamine interior. Refer to the millwork shop drawings for exact locations.

CSCI: Contractor Supplied, Contractor Installed
OSCI: Owner Supplied, Contractor Installed
OSOI: Owner Supplied, Owner Installed

STONE

CODE:	FF&E ITEM #:	CSCI:	OSCI:	OSOI:	DESCRIPTION:	MANUFACTURER:	FINISH / COLOR:	LOCATION:	REMARKS / NOTES:
STN-1	P-902-01	*OR	*		QUARTZ THICKNESS: 3/4" (With 2" Laminated Finished Edges) EDGE TREATMENT: Eased / Polished	Projectstone	ecoQUARTZ Carmel Crunch	Host (High Countertop) Bar (Countertop)	NOTE: Sample from production to be approved by the owner's rep prior to ordering.
STN-2	P-902-02	*OR	*		QUARTZ THICKNESS: 3/4" (With 1-1/2" Laminated Finished Edges) EDGE TREATMENT: Eased / Polished	Projectstone	ecoQUARTZ Carmel Crunch	Back Bar (Countertop) Meeting Rooms (Countertops) Coffee Service (Countertop)	NOTE: Sample from production to be approved by the owner's rep prior to ordering.
STN-3	P-902-03	*OR	*		QUARTZ THICKNESS: 3/4" (With 1-1/2" Laminated Finished Edges) EDGE TREATMENT: Eased / Polished	Projectstone	ecoQUARTZ Jolie Brown	Guest Kitchen (Countertop) Trash (Countertop)	NOTE: Sample from production to be approved by the owner's rep prior to ordering.
STN-4	P-902-04	*OR	*		QUARTZ THICKNESS: 3/4" EDGE TREATMENT: Eased / Polished	Projectstone	ecoQUARTZ Carmel Crunch	Host (Low Countertop) Guest POS (Countertop) Public Restrooms (Vanity Countertops)	NOTE: Sample from production to be approved by the owner's rep prior to ordering.
STN-5	P-902-05	*OR	*		QUARTZ THICKNESS: 3/4" EDGE TREATMENT: Eased / Polished	Projectstone	ecoQUARTZ Chai Latte	Guest Kitchen (Community Tabletop) Bar/Cafe (Community Tabletop) Gallery (Coffee Tabletop) E-Room Desk E-Room Printer Desk (Countertop)	NOTE: Sample from production to be approved by the owner's rep prior to ordering.

CSCI: Contractor Supplied, Contractor Installed
OSCI: Owner Supplied, Contractor Installed
OSOI: Owner Supplied, Owner Installed

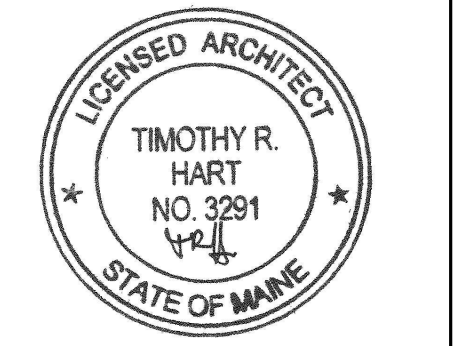

Mark	Date	Description

Project Status

ISSUED FOR
CONSTRUCTION

03-01-2013

Drawing Title

INTERIOR FINISH
SCHEDULE @
PUBLIC SPACES

Scale: 1/4" = 1'-0"

Drawing Number

A61.3