


First Floor Foodservice Equipment Plan
 SCALE - 1/4" = 1' - 0"

HOLD ALLOWANCE FOR VESTIBULE ENCLOSURE

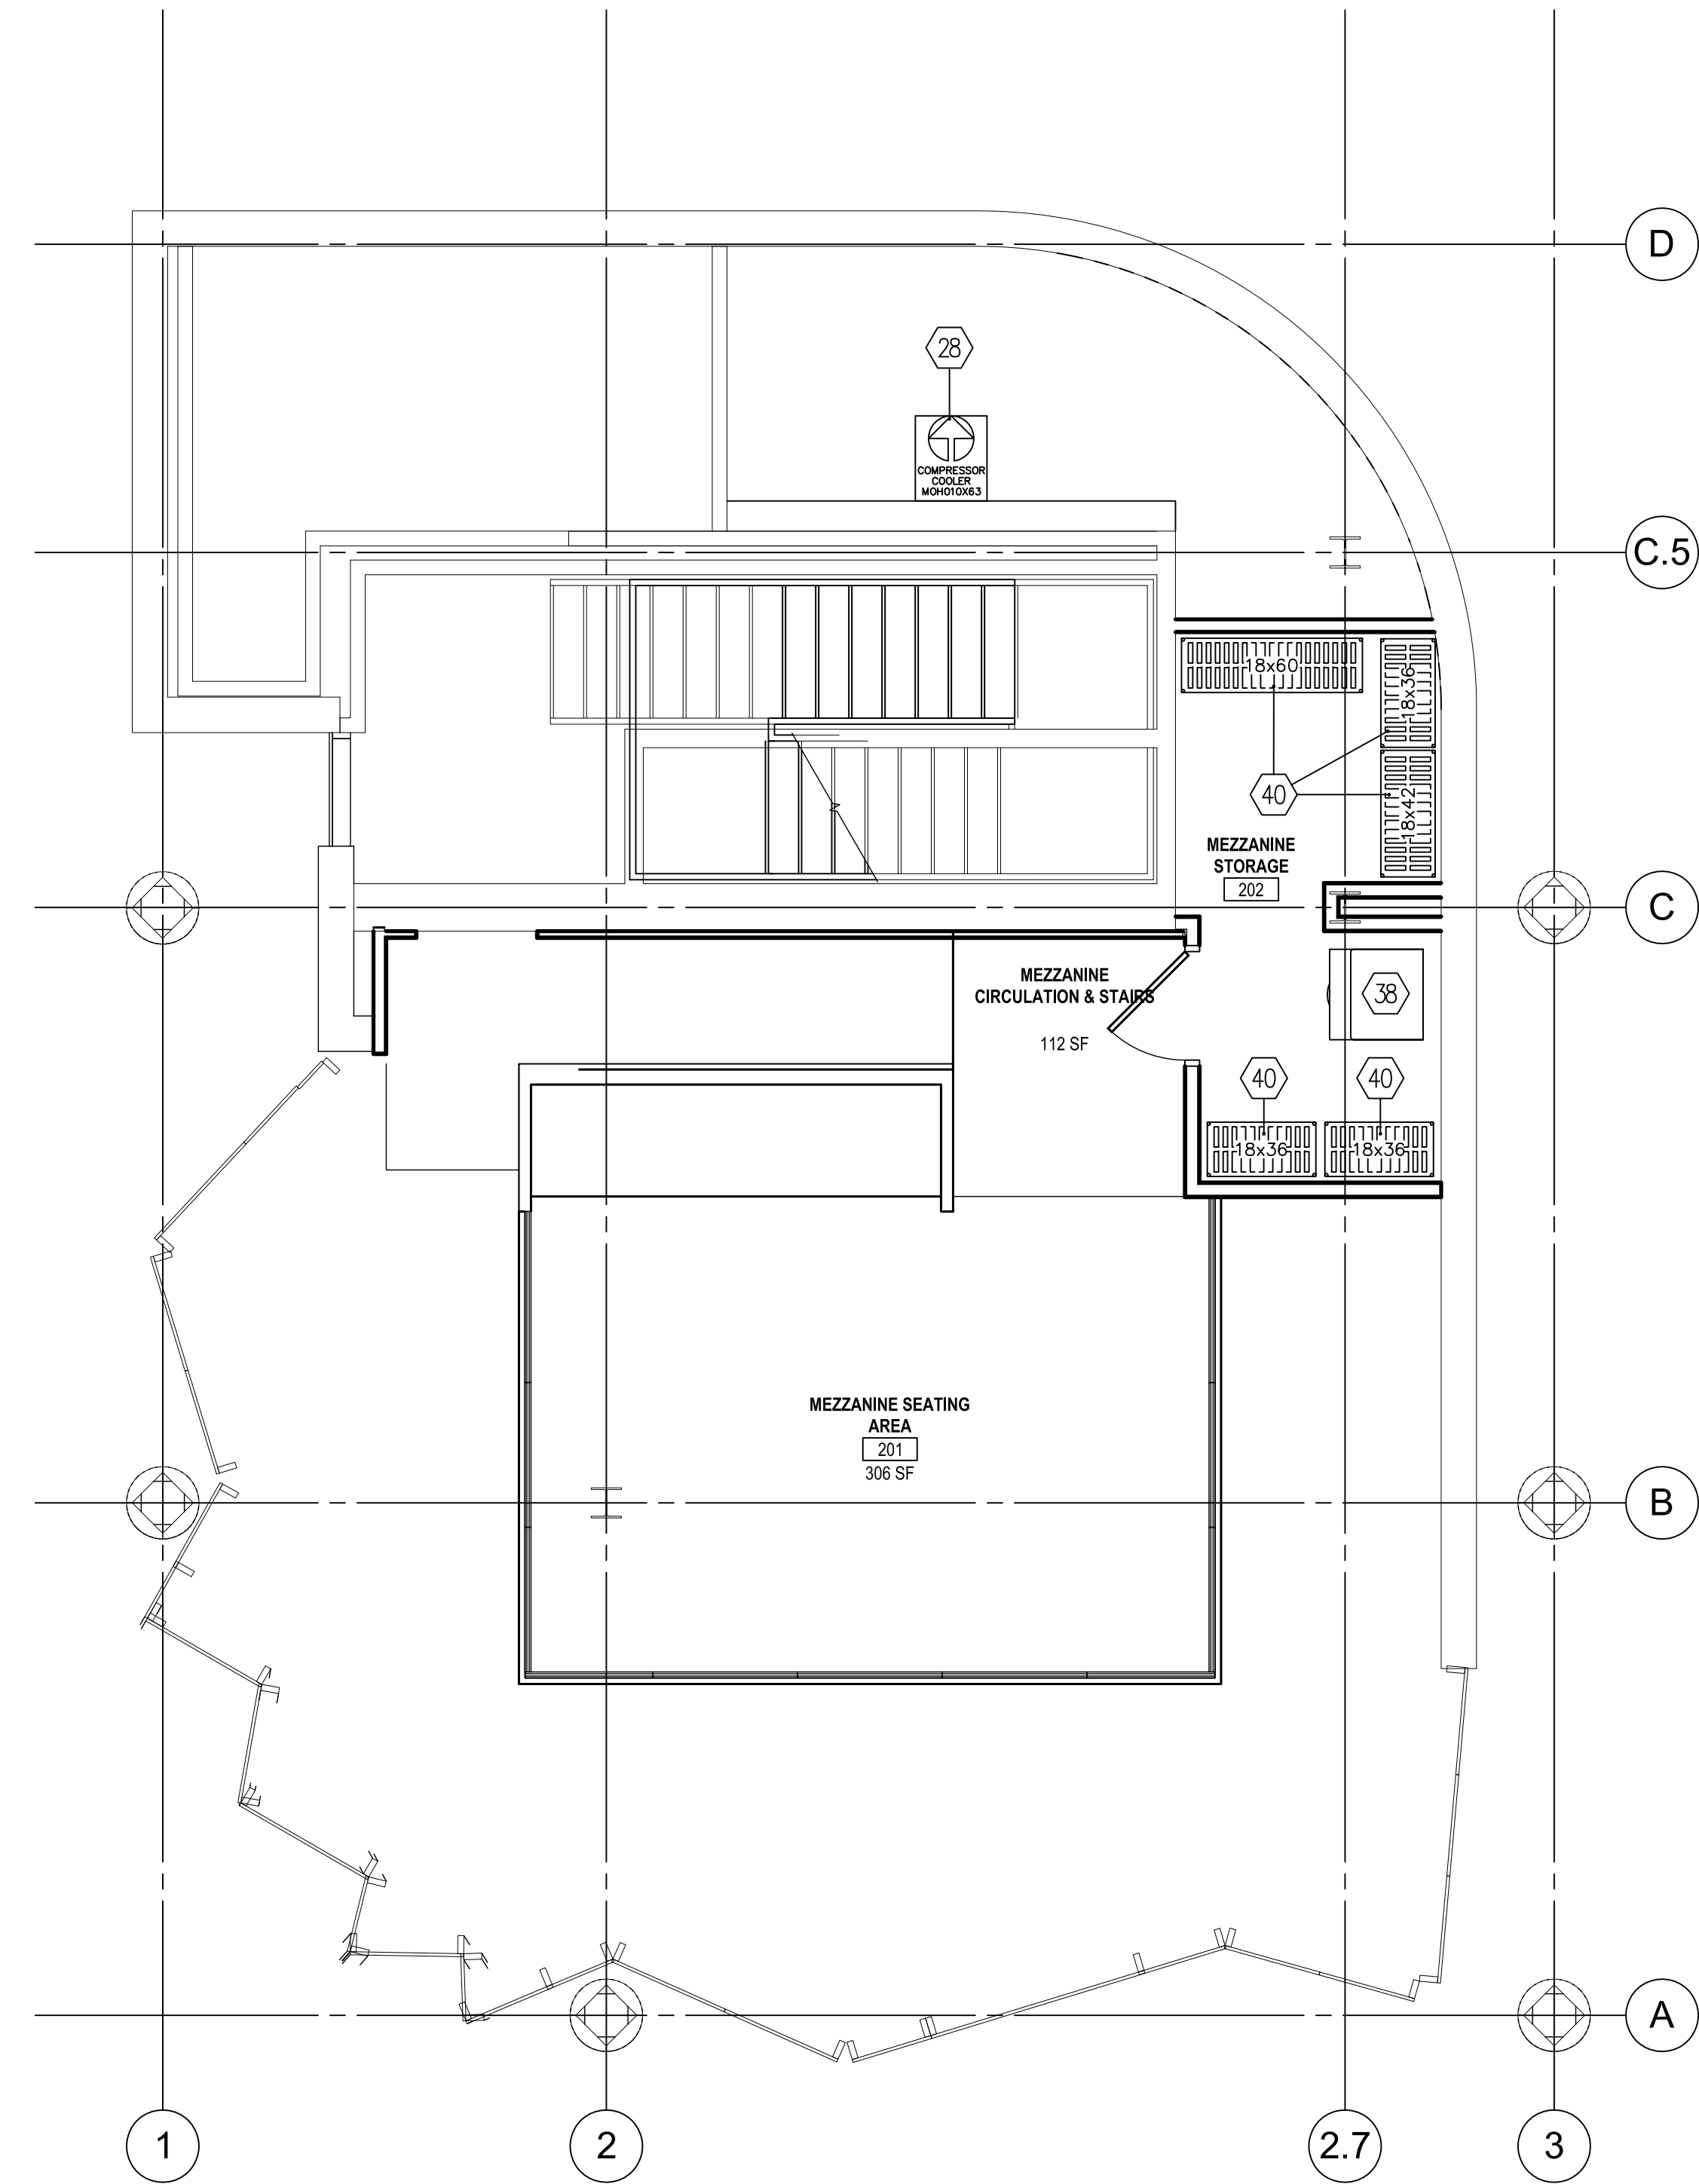

Mezzanine Foodservice Equipment Plan
 SCALE - 1/4" = 1' - 0"

EQUIPMENT SCHEDULE		
MK.	QTY	DESCRIPTION
1	1	REFRIGERATOR, 1-SECTION
2	1	VENTLESS HOOD SYSTEM
3	1	REFRIGERATED EQUIPMENT STAND
4	1	INDUCTION PLANCHA
5	1	INDUCTION COOKTOP 4-BURNER
6	-	- SPARE NUMBER -
7	1	WORK TABLE
8	1	COMBI-OVEN, BOILERLESS
9	-	- SPARE NUMBER -
10	1	FIRE SUPPRESSION SYSTEM
11	1	DRAWER WARMER
12	1	FREEZER, UNDERCOUNTER
13	1	REFRIGERATED SANDWICH UNIT
14	2	BACK BAR COOLER (1-FUTURE)

EQUIPMENT SCHEDULE		
MK.	QTY	DESCRIPTION
15	-	- SPARE NUMBER -
16	1	UNDERBAR, DRAINBOARD
17	-	- SPARE NUMBER -
18	1	UNDERBAR, ICE BIN
19	1	UNDERBAR, SPEED RAIL
20	-	- SPARE NUMBER -
21	-	- SPARE NUMBER -
22	-	- SPARE NUMBER -
23	3	TRASH CONTAINER, SLIM JIM
24	-	- SPARE NUMBER -
25	1	BEER LINE CHILLER (BY VENDOR)
26	1	WALK-IN COOLER
27	1	EVAPORATOR COIL, COOLER
28	1	COMPRESSOR, COOLER

EQUIPMENT SCHEDULE		
MK.	QTY	DESCRIPTION
29	3	SHELVING UNIT
30	-	- SPARE NUMBER -
31	1	WORK TABLE WITH SINK
32	2	WALL SHELF
33	1	SHELVING UNIT
34	1	MOP SINK
35	2	DISHWASHER, UNDERCOUNTER
36	3	HAND SINK
37	1	SINK, 3-COMPARTMENT
38	1	ICE MACHINE WITH BIN
39	1	BAG-N-BOX RACK (BY OTHERS)
40	5	SHELVING UNIT

NOTES:

- ELECTRICAL CONTRACTOR TO RUN CONTROL WIRING BETWEEN EVAPORATORS AND REMOTE CONDENSING UNITS FOR WALK-IN COOLER AND FREEZER. CO-ORDINATE WITH KITCHEN EQUIPMENT CONTRACTOR (KEC).
- ELECTRICAL CONTRACTOR TO INSTALL SEAL-OFF FITTINGS ON ALL CONDUIT PENETRATING WALK-IN COOLER AND FREEZER.
- ELECTRICAL CONTRACTOR TO PROVIDE 115 VOLT W/P RECEPTACLE IN FREEZER FOR DRAIN LINE HEAT TAPE. HEAT TAPE FURNISHED AND INSTALLED BY PLUMBING/ELECTRICAL CONTRACTOR.
- PLUMBING CONTRACTOR TO INSTALL VACUUM BREAKER, SOLENOID VALVE, AND FLOW CONTROL VALVE (FURNISHED) IN COLD WATER LINE TO DISPOSER.
- KITCHEN EQUIPMENT CONTRACTOR TO PROVIDE GAS REGULATING VALVES FOR ALL GAS OPERATED KITCHEN EQUIPMENT.
- FLOOR DRAIN REQUIRES FLOW RATE OF 5 G.P.M.
- PLUMBING CONTRACTOR TO INSTALL ALL DRAINS AND FAUCETS SUPPLIED BY KITCHEN EQUIPMENT CONTRACTOR.
- PLUMBING CONTRACTOR TO FURNISH AND INSTALL ALL INDIRECT DRAIN INTERPIPING TO FLOOR DRAINS.
- PLUMBING CONTRACTOR TO INSTALL GAS REGULATORS ON ALL GAS EQUIPMENT. REGULATORS BY K.E.C.
- PLUMBING CONTRACTOR TO IGNITE ALL GAS PILOTS AND ASSIST K.E.C. AND FACTORY REP'S IN START-UP AND DEMONSTRATION OF EQUIPMENT.
- ELECTRICAL CONTRACTOR TO INTERWIRE SOLENOID VALVE AND CONTROL PANEL TO DISPOSER.
- GENERAL CONTRACTOR TO PROVIDE ALL REQUIRED WALL BACKING AS DIRECTED BY K.E.C.
- GENERAL CONTRACTOR TO PROVIDE ALL REQUIRED SLEEVES THROUGH BUILDING FOR REMOTE REFRIGERATION LINES. REFRIGERATION LINES BY K.E.C.