


ROOF DECK PARKING LIGHTING STATISTICS:

	AS DESIGNED	RECOMMENDED BY IESNA*
AVERAGE:	2.4 FC	
MAXIMUM:	6.4 FC	
MINIMUM:	0.6 FC	0.5 FC (or greater)
AVERAGE-TO-MINIMUM UNIFORMITY RATIO:	4.0-TO-1	4.0-TO-1 (or lesser)
MAXIMUM-TO-MINIMUM UNIFORMITY RATIO:	10.7-TO-1	15.0-TO-1 (or lesser)

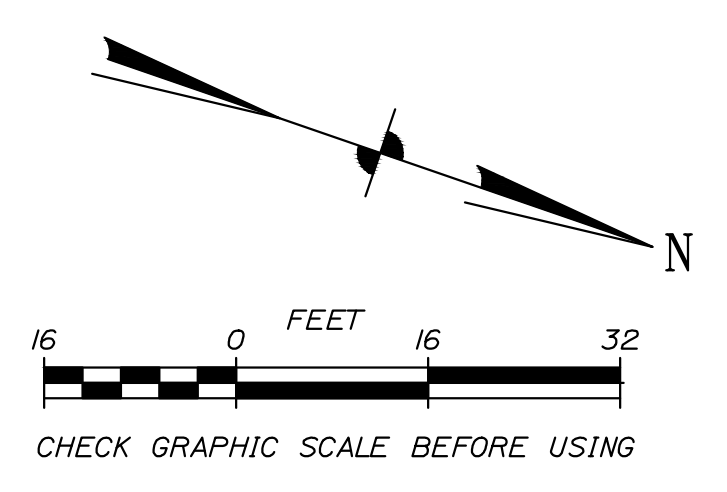

1 | ROOF DECK LIGHTING CALCULATION PLAN
SCALE: 1/16" = 1'-0"

CALCULATED ILLUMINANCE LEVELS ARE INDICATED AS INITIAL FOOTCANDLES AT THE ROOF DECK.

NOT FOR CONSTRUCTION
LEVEL III SITE PLAN APPLICATION
7/24/18

Appr	
Drawn	
Date	
Rev	

222 ST. JOHN ST PG
PORTLAND, ME
ROOF DECK LIGHTING CALCULATION PLAN

Designed LEB	Scale 1"=16'-0"
Drawn LEB	Date 07/16/18
Checked LEB	Project Job Number 4070

E0.5