

2009 NFPA: CODE DATA	
	CH. 38 BUSINESS (EXISTING BUILDING)
TYPE OF CONSTRUCTION	TYPE II O.O.O (EXISTING)
OCCUPANT LOAD	2,440 S.F. /100 = 25 SF/PP
EXTERIOR BEARING WALLS	0 HOUR
EXTERIOR NONBEARING WALLS	0 HOUR
INTERIOR BEARING WALLS	0 HOUR
COLUMNS	0 HOUR
BEAMS, GIRDERS, TRUSSES	0 HOUR
FLOOR CONSTRUCTION	0 HOUR
FLOOR SEPARATION AT ASSEMBLY USE GROUP	1 HOUR
ROOF CONSTRUCTION	0 HOUR
MECHANICAL / ELECTRICAL ROOMS	1 HOUR
TENANT SEPARATION	0 HOUR
ABSOLUTE HEALTH CHIROPRACTIC - PARTIAL FIRST FLOOR	2,440 S.F.
TOTAL FLOOR AREA - FIRST FLOOR	32,000 S.F. +/- TOTAL FLOOR
BUILDING HEIGHT	173' +/- , 13 STORIES
FIRE SUPPRESSION	YES
HAZZARD	1 HOUR
FIRE EXTINGUISHERS	PER NFPA 2009
COMMON PATH OF TRAVEL LIMIT	75'
DEAD-END LIMIT	50'
TRAVEL DISTANCE LIMIT	200'
EXITS	
CORRIDOR WIDTH	36"
STAIR ENCLOSURES	1 HOUR
SHAFTS	1 HOUR
EXIT ACCESS CORRIDORS	0 HOUR
FLAME SPREAD RATINGS:	
INTERIOR FINISH REQUIREMENTS (SPRINKLERED BLDG)	
WALLS AND CEILINGS	CLASS A, B OR C
EXIT ACCESS CORRIDORS	CLASS A OR CLASS B
INTERIOR FLOOR FINISH REQUIREMENTS	
EXITS	CLASS I OR CLASS II (REDUCTION PERMITTED OF ONE CLASS IN SPRINKLERED BUILDING)
CORRIDORS	
GENERAL NOTES	1. ALL PENETRATIONS OF SMOKE BARRIERS, PARTITIONS, FIRE RATED WALLS AND FLOORS SHALL BE SEALED WITH PROPER APPROVED MATERIALS

2009 IBC: CODE DATA		
	Business Occupancy (EXISTING BLDG)	SECTION 403 HIGH RISE BUILDINGS
OCCUPANT LOAD	2,4403/100 = 25	
USE GROUP CLASSIFICATION	BUSINESS	
TYPE OF CONSTRUCTION	TYPE II B (EXISTING)	
ACTUAL FLOOR AREA	32,000 S.F. - RENOVATED AREA IS2,440 S.F.	
TOTAL BUILDING AREA	240,000 SF +/-	
ACTUAL BUILDING HEIGHT	173' +/-	
EXIT ACCESS TRAVEL DISTANCE	200'-0"	
DEAD END CORRIDORS	20'-0" / 50'-0" W/ FIRE SUPPRESSION SYSTEM	
CORRIDOR WIDTH	36"	
STAIRWAY WIDTH	44"	
FIRE RATING:		
EXTERIOR BEARING WALLS	0 HOUR	
INTERIOR BEARING WALLS	0 HOUR	
NON-BEARING WALLS & PARTITIONS	0 HOUR	
FLOOR CONSTRUCTION	0 HOUR	
ROOF CONSTRUCTION	0 HOUR	
CORRIDORS	0 HOUR	
STAIR ENCLOSURES	1 HOUR	
SHAFTS	1 HOUR FOR < 4 STORIES	
UNIT SEPARATION	1 HOUR	
MECHANICAL/ELECTRICAL ROOMS	1 HOUR	
LAUNDRY/STORAGE >100 SF	1 HOUR	
WASTE COLLECTION >100 SF	1 HOUR	
FLAME SPREAD RATINGS:		
INTERIOR WALL & CEILING FINISH REQUIREMENTS		
EXIT ENCLOSURES & EXIT PASSAGEWAYS	A	
CORRIDORS	B	
ROOMS OR ENCLOSED SPACES	C	
INTERIOR FLOOR FINISH REQUIREMENTS		
EXIT ENCLOSURES & EXIT PASSAGEWAYS	CLASS II	
CORRIDORS	CLASS II	
GENERAL NOTES	1. ALL PENETRATIONS OF SMOKE BARRIERS, PARTITIONS, FIRE RATED WALLS AND FLOORS SHALL BE SEALED WITH PROPER APPROVED MATERIALS	
	2. ALL WORK SHALL CONFORM TO LOCAL AND STATE CODES, ORDINANCES, AND REQUIREMENTS, ACCESSIBILITY PER A.D.A.A.G.	

EI	CODE REVIEW DATA
----	------------------

AI	NOT USED
----	----------

<u>LIFE SAFETY LEGEND:</u>	
<u>EXIT</u>	DIRECTIONAL EXIT SIGNAGE
<u>EXIT</u>	EXIT SIGNAGE
FE	FIRE EXTINGUISHER
BS 30	FIRE ALARM AUDIO/VISUAL STROBE – NUMERAL DENOTES CANDELA RATING
IS 30	AUDIO/VISUAL STROBE – NUMERAL DENOTES CANDELA RATING
EA	EMERGENCY BATTERY UNIT – 2 HEADS

USABLE AREA UNDER RENOVATIONS:

FIRST FLOOR: 2.440 S.F.

NOTES:

1. FOR FIRE RESISTANCE RATED NON LOAD BEARING WALLS AND FIRE RESISTANCE RATED FLOOR ASSEMBLIES, PROVIDE THROUGH PENETRATION FIRE STOP SYSTEMS THAT ARE PRODUCED AND INSTALLED TO RESIST THE SPREAD OF FIRE ACCORDING TO THE REQUIREMENTS INDICATED, RESIST PASSAGE OF SMOKE AND OTHER GASES, AND MAINTAIN ORIGINAL FIRE RESISTANCE RATING OF ASSEMBLY PENETRATED.

2. F-RATED SYSTEMS: PROVIDE THROUGH PENETRATION FIRE STOP SYSTEMS WITH F RATINGS INDICATED AS DETERMINED PER ASTM E 814 BUT NOT LESS THAN THAT EQUALING OR EXCEEDING FIRE RESISTANCE RATINGS OF CONSTRUCTIONS PENETRATED.


3. T-RATED SYSTEMS: FOR THE FOLLOWING CONDITIONS, PROVIDE THROUGH-PENETRATION FIRESTOPS WITH T-RATING INDICATED AS WELL AS F RATINGS AS DETERMINED PER ASTM E 814, WHERE SYSTEMS PROTECT PENETRATING ITEMS EXPOSED TO POTENTIAL CONTACT WITH ADJACENT MATERIALS IN OCCUPIABLE FLOOR AREAS:

A. PENETRATIONS LOCATED OUTSIDE WALL CAVITIES.  
 B. PENETRATIONS LOCATED OUTSIDE FIRE RESISTANCE SHAFT ENCLOSURES  
 C. PENETRATIONS LOCATED IN CONSTRUCTION CONTAINING FIRE PROTECTION  
 RATED OPENINGS.

D. PENETRATION OF ITEMS LARGER THAN 4 INCH DIAMETER NOMINAL PIPE OR 16 SQ IN IN OVERALL CROSS SECTIONAL AREA.

5. PROVIDE THROUGH PENETRATION FIRE STOP SYSTEMS AT ALL EXISTING ABANDONED CONCRETE CORE DRILLS.

6. ALL THROUGH PENETRATION PRODUCTS SHALL BE FROM A SINGLE SOURCE SUPPLIER.

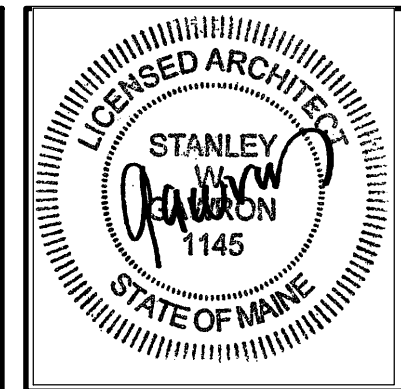

ONE CITY CENTER  
ABSOLUTE HEALTH CHIROPRACTIC  
FIRST FLOOR  
PORTLAND, MAINE

[illegible]

DATE:	11/14/13
PROJECT #	100313
DRAWN BY:	DLP
CHECKED BY:	SWG
DRAWING SCALE	AS NOTED

SHEET TITLE

CODE REVIEW  
LIFE SAFETY

G102

© COPYRIGHT 1985-2008  
REPRODUCTION OR REUSE OF THIS  
DOCUMENT WITHOUT WRITTEN  
PERMISSION OF GAWRON TURGEON  
ARCHITECTS IS PROHIBITED

