City of Portland, Maine - Building or Use Permit Application 389 Congress Street, 04101, Tel: (207) 874-8703, FAX: 874-8716 Location of Construction: Owner: Phone: Permit No: 244 Brackett St Ptid Redecs LLC Trust 772-4203 Lessee/Buver's Name: Owner Address: Phone: RusinessName: 1375 Congress St Permit Issued: Address: Phone: Contractor Name: **Apartment Locator 757 Congress St Ptld 04102 COST OF WORK: PERMIT FEE: Past Use: Proposed Use: SEP 2 8 1999 30.00 1-fam Commercial FIRE DEPT. Approved INSPECTION: Use Group: 1/3 Type 51 ☐ Denied MOCAGO Zone: CBL: Signature: Zoning Approval Proposed Project Description: PEDESTRIAN ACTIVITIES DISTRICT Approved Action: Special Zone or Reviews: Approved with Conditions: Change of Use from Commercial to 1-family ☐ Shoreland Denied □Wetland ☐ Flood Zone Signature: □ Subdivision Date: ☐ Site Plan mai ☐minor ☐mm ☐ Permit Taken By: Date Applied For: 57 September 10, 1999 Zoning Appeal □ Variance This permit application does not preclude the Applicant(s) from meeting applicable State and Federal rules. ☐ Miscellaneous Building permits do not include plumbing, septic or electrical work. 2. ☐ Conditional Use Building permits are void if work is not started within six (6) months of the date of issuance, False informa-□Interpretation □Approved tion may invalidate a building permit and stop all work... □ Denied Historic Preservation □ Not in District or Landmark ☐ Does Not Require Review PERMIT ISSUED □ Requires Review WITH REQUIREMENTS Action: CERTIFICATION ☐ Appoved I hereby certify that I am the owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been ☐ Approved with Conditions authorized by the owner to make this application as his authorized agent and I agree to conform to all applicable laws of this jurisdiction. In addition, □ Denied if a permit for work described in the application is issued. I certify that the code official's authorized representative shall have the authority to enter all Date: areas covered by such permit at any reasonable hour to enforce the provisions of the code(s) applicable to such permit September 13, 1999 SIGNATURE OF APPLICANT ADDRESS: DATE PHONE:

White-Permit Desk Green-Assessor's Canary-D.P.W. Pink-Public File Ivory Card-Inspector

PHONE:

RESPONSIBLE PERSON IN CHARGE OF WORK, TITLE

3

CEO DISTRICT

THIS IS NOT A PERMIT/CONSTRUCTION CANNOT COMMENCE UNTIL THE PERMIT IS ISSUED

Building or Use Permit Pre-Application

Attached Single Family Dwellings/Two-Family Dwelling

Multi-Family or Commercial Structures and Additions Thereto

In the interest of processing your application in the quickest possible manner, please complete the Information below for a Building or Use Permit.

NOTE**If you or the property owner owes real estate or personal property taxes or user charges on ANY PROPERTY within the City, payment arrangements must be made before permits of any kind are accepted.

Location/Address of Construction (include Portion of Building) 244 Brackett St. Pontland, Me						
Total Square Footage of Proposed Structure	Square Footage of Lot					
Tax Assessor's Chart, Block & Lot Number Chart# 055 Block# Lot# 044	Owner	Bedecs	LLC TO	ust	Telephone	24203
Owner's Address: Lessee/Buy		r's Name (If Applicable)		Cos	d Of Work:	Fee
1375 Congress St PHAM	e			\$	0	\$30
Proposed Project Description:(Please be as specific as possible)						
NONE C/U Comm - 1-Som						
Contractor's Name, Address & Telephone						Rec'd By
Current Use Besidential	Tomm	Proposed Use:	Rosid	ent	TAB	1-fam

Separate permits are required for Internal & External Plumbing, HVAC and Electrical installation.

- •All construction must be conducted in compliance with the 1996 B.O.C.A. Building Code as amended by Section 6-Art II. •All plumbing must be conducted in compliance with the State of Maine Plumbing Code.
 - •All Electrical Installation must comply with the 1996 National Electrical Code as amended by Section 6-Art III.

•HVAC(Heating, Ventililation and Air Conditioning) installation must comply with the 1993 BOCA Mechanical Code. Appertment focator

Appertment focator

15 1 Coryum St

Potland ME

(410)

You must Include the following with you application:

1) ACopy of Your Deed or Purchase and Sale Agreement 2) A Copy of your Construction Contract, if available

3) A Plot Plan/Site Plan

Minor or Major site plan review will be required for the above proposed projects. The attached checklist outlines the minimum standards for a site plan.

4) Building Plans

Unless exempted by State Law, construction documents must be designed by a registered design professional.

A complete set of construction drawings showing all of the following elements of construction:

- Cross Sections w/Framing details (including porches, decks w/ railings, and accessory structures)
- Hoor Plans & Elevations
- Window and door schedules
- Toundation plans with required drainage and dampproofing
- Electrical and plumbing layout Mechanical drawings for any specialized equipment such as furnaces, chiumcys, gas equipment, HVAC equipment (air handling) or other types of work that may require special review must be included.

Certification

Thereby certify that I am the Owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been authorized by the owner to make this application as his/her authorized agent. I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in this plication is issued. Logify that the Code Official's authorized representative shall have the authority to enter all areas covered by this permit at any reasonable hour to


mature of applicant:	Date:	DEPT OF BUILDING IN	SPECTION D. ME
Building Permit Fee: \$30.00 for the 1st \$1000.cost plus			nster.
Additional Site review and related fees are	e attached on a separa	ate adders 1 0 199	99

BUILDING PERMIT REPORT

		BUILDING PERMIT REPORT
	DATE:	19 Sept. 99, ADDRESS: 244 Brackett &T. CBL: \$55-B-\$44
	REASO	N FOR PERMIT: Change of USE Commorcial To R-3 Single Family
	BUILD	INGOWNER: Bedecs LLC Trust.
	PERMI	TAPPLICANT: 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
	USE GF	ROUP ROUP CONSTRUCTION TYPE 5 B
		y's Adopted Building Code (The BOCA National Building Code/1996 with City Amendments) y's Adopted Mechanical Code (The BOCA National Mechanical Code/1993)
		CONDITION(S) OF APPROVAL
	- 1	rmit is being issued with the understanding that the following conditions are met: $\frac{\times/, \times//, \times/2, \times/3, \times/4 \times/5}{9 \times 32 \times 33}$
	Approv	ed with the following conditions:
V	۸.	
4	1.	This permit does not excuse the applicant from meeting applicable State and Federal rules and laws. Before concrete for foundation is placed, approvals from the Development Review Coordinator and Inspection Services must be obtained.
•	2.	(A 24 hour notice is required prior to inspection)"ALL LOT LINES SHALL BE CLEARLY MARKED
		BEFORE CALLING."
	3.	Foundation drain shall be placed around the perimeter of a foundation that consists of gravel or crushed stone containing not more than
	٥.	10 percent material that passes through a No. 4 sieve. The drain shall extend a minimum of 12 inches beyond the outside edge of the
		footing. The thickness shall be such that the bottom of the drain is not higher than the bottom of the base under the floor, and that the
		top of the drain is not less than 6 inches above the top of the footing. The top of the drain shall be covered with an approved filter membrane material. Where a drain tile or perforated pipe is used, the invert of the pipe or tile shall not be higher than the floor
		elevation. The top of joints or top of perforations shall be protected with an approved filter membrane material. The pipe or tile shall be
		placed on not less than 2" of gravel or crushed stone, and shall be covered with not less than 6" of the same material. Section 1813.5.2
	4.	Foundations anchors shall be a minimum of ½" in diameter, 7" into the foundation wall, minimum of 12" from corners of foundation and
	5.	a maximum 6' o.c. between bolts. (Section 2305.17) Waterproofing and dampproofing shall be done in accordance with Section 1813.0 of the building code.
	6.	Precaution must be taken to protect concrete from freezing. Section 1908.0
	7.	It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to verify
	0	that the proper setbacks are maintained.
	8.	Private garages located <u>beneath habitable rooms</u> in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than I-hour fire resisting rating. <u>Private</u>
		garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area
		by means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the
	0	garage side. (Chapter 4, Section 407.0 of the BOCA/1996)
	9.	All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National Mechanical Code/1993). Chapter 12 & NFPA 211
	10.	Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 1214.0 of the City's Building
		Code.
X	<11.	Guardrails & Handrails: A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use
		Groups 42", except Use Group R which is 36". In occupancies in Use Group A, B, H-4, I-1, I-2, M and R and public garages and open
		parking structures, open guards shall have balusters or be of solid material such that a sphere with a diameter of 4" cannot pass through
		any opening. Guards shall not have an ornamental pattern that would provide a ladder effect. (Handrails shall be a minimum of 3e4" but
		not more than 38". Use Group R-3 shall not be less than 30", but not more than 38".) Handrail grip size shall have a circular cross section with an outside diameter of at least 1 ¼" and not greater than 2". (Sections 1021 & 1022.0) - Handrails shall be on both sides of
		stairway. (Section 1014.7)
K	_12.	Headroom in habitable space is a minimum of 7'6". (Section 1204.0)
X	13.	Stair construction in Use Group R-3 & R-4is a minimum of 10" tread and 7 3/4" maximum rise. All other Use Group minimum 11"
J	14	tread. 7" maximum rise. (Section 1014.0) The minimum headroom in all parts of a stairway shall not be less than 80 inches. (6'8") 1014.4
L	14. _15.	Every sleeping room below the fourth story in buildings of Use Groups R and I-1 shall have at least one operable window or exterior door
1		approved for emergency egress or rescue. The units must be operable from the inside without the use of special knowledge or separate
		tools. Where windows are provided as means of egress or rescue they shall have a sill height not more than 44 inches (1118mm) above the floor. All egress or rescue windows from sleeping rooms shall have a minimum net clear opening height dimension of 24 inches
		the noon. An exicas of rescue windows from steeping rooms shall have a milliminal fiel clear opening height afficilist of 24 fieles

(610mm). The minimum net clear opening width dimension shall be 20 inches (508mm), and a minimum net clear opening of 5.7 sq. ft.

(Section 1018.6)

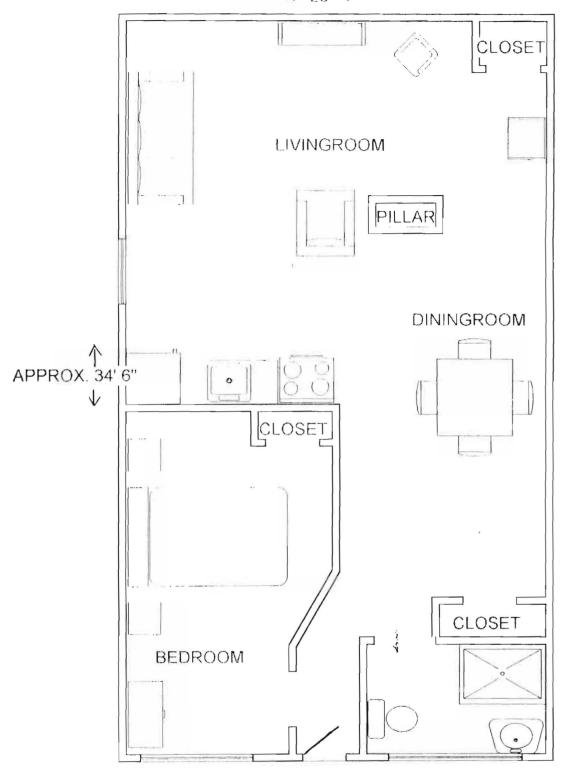

(honge of Noncontoming use


(honge of Noncontoming use

(sec. 14-384)

(sec. 14-3

690 th



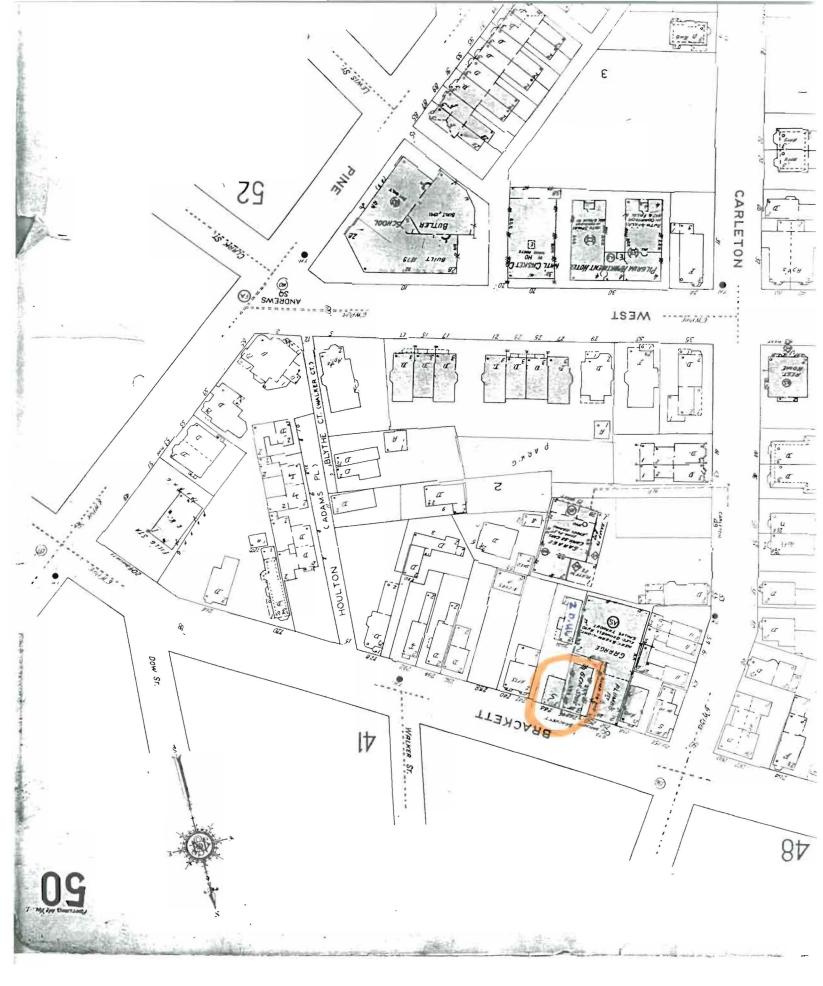



CITY OF PORTLAND, MAINE

Department Building Inspection

Certificate of Occupancy

LOCATION

244 Brackett Street CBL: 055-B-044

Issued to Bedeca LLC Trust

Date of Issue

12/1/99

— changed as to use under Building Permit, No. 991077 , has had final inspection, has been found to conform substantially to requirements of Zoning Ordinance and Building Code of the City, and is hereby approved for occupancy or use, limited or otherwise, as indicated below.

PORTION OF BUILDING OR PREMISES

APPROVED OCCUPANCY

Entire

Single Family BOCA 96 Use group R-3 Type 5B

Limiting Conditions:

Change allows one family unit use only.

This certificate supersedes certificate issued 8/18/6

Approved:

(Date)

Inspector

Inspector of Buildings

Notice: This certificate identifies lawful use of building or premises, and ought to be transferred from owner to owner when property changes hands. Copy will be furnished to owner or lessee for one dollar.

	17483114			
Change ~ Occupancy	1			
11/30/95 No physical changes beyond be droom has SIV 44 1/2 inches above Floor - Or	paint + carpet	avdor Egres win	and in	i rement
of 44 inches or less in height - smoke alarm to				
to check for sill krisht. Tom M				
11/30/99 Returned to check sill height. Everything OK for Cgo. The	- Step pyt on b	ittom to meet	regun	ements
	201	/		
	Olore ou			
				*
			*	Y.
	T	Inspection Record		D 4
	Type Foundation:			Date
	Plumbing:		-	
	Final:		-	

	Each apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable when it exits
	directly from the apartment to the building exterior with no communications to other apartment units. (Section 1010.1)
	All vertical openings shall be enclosed with construction having a fire rating of at least one (1) hour, including fire doors with self
	closer's. (Over 3 stories in height requirements for fire rating is two (2) hours.) (Section 710.0)
	The boiler shall be protected by enclosing with (1)hour fire rated construction including fire doors and ceiling, or by providing automatic
	extinguishment. (Table 302.1.1)
	All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of
	the City's Building Code Chapter 9, Section 920.3.2 (BOCA National Building Code/1996), and NFPA 101 Chapter 18 &19. (Smoke
	detectors shall be installed and maintained at the following locations):
	In the immediate vicinity of bedrooms
	In all bedrooms
	 In each story within a dwelling unit, including basements
	In addition to the required AC primary power source, required smoke detectors in occupancies in Use Groups R-2, R-3 and I-1 shall
	receive power from a battery when the AC primary power source is interrupted. (Interconnection is required) Section 920.3.2.
	A portable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved agency and be of an approved
	type. (Section 921.0)
	The Fire Alarm System shall maintained to NFPA #72 Standard.
	The Sprinkler System shall maintained to NFPA #12 Standard. The Sprinkler System shall maintained to NFPA #13 Standard.
	All exit signs, lights and means of egress lighting shall be done in accordance with Chapter 10 Section & Subsections 1023.0 & 1024.0
	of the City's Building Code. (The BOCA National Building Code/1996)
	Section 25-135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a permit to excavate or open
	any street or sidewalk from the time of November 15 of each year to April 15 of the following year".
	The builder of a facility to which Section 4594-C of the Maine State Human Rights Act Title 5 MRSA refers, shall obtain a certification
	from a design professional that the plans commencing construction of the facility, the builder shall submit the certification the Division of
	Inspection Services.
	Ventilation shall meet the requirements of Chapter 12 Sections 1210.0 of the City's Building Code. (Crawl spaces & attics).
	All electrical, plumbing and HVAC permits must be obtained by a Master Licensed holders of their trade. No closing in of walls until
	all electrical (min.72 hours notice) and plumbing inspections have been done.
	All requirements must be met before a final Certificate of Occupancy is issued.
	All building elements shall meet the fastening schedule as per Table 2305.2 of the City's Building Code (the BOCA National Building
	Code/1996).
	Ventilation of spaces within a building shall be done in accordance with the City's Mechanical Code (The BOCA National Mechanical
	Code/1993). (Chapter M-16) $\frac{1}{2}$
	Code/1993). (Chapter M-16) Please read and implement the attached Land Use Zoning report requirements. Shall Fe main 1 unit only
	Boring, cutting and notching shall be done in accordance with Sections 2305.4.4, 2305.5.1 and 2305.5.3 of the City's Building Code.
	Glass and glazing shall meet the requirements of Chapter 24 of the building code.
	All signage, shall be done in accordance with Section 3102.0 signs of the City's Building Code, (The BOCA National Building Code
	1996).

	A
-	1/4/
1	And the state of t
tt	Horises. Building Inspector
1	Mana Sahawakal. Zanina Administrator
	Marge Schmuckal, Zoning Administrator

PSH 7/24/99

^{**}On the basis of plans submitted and conditions placed on these plans any deviations shall require a separate approval.