

Terminal positions PVC

figure 16

Fittings or Piping Equivalent	feet	m
45 degree elbow	3	0.91
90 degree elbow	6	1.83
plastic pipe per foot	1	0.30
concentric vent kit	5	1.52


Equivalent friction loss of PVC/CPVC table 8



WARNING


For closet and alcove installation, CPVC material, instead of PVC, must be used in a closet/alcove structure. Failure to follow this warning could result in fire, personal injury, or death.

Rinnai strongly suggests the use of concentric venting for all closet and alcove installations. For non direct vent room air applications see sections 6.7.6 and 6.7.9.

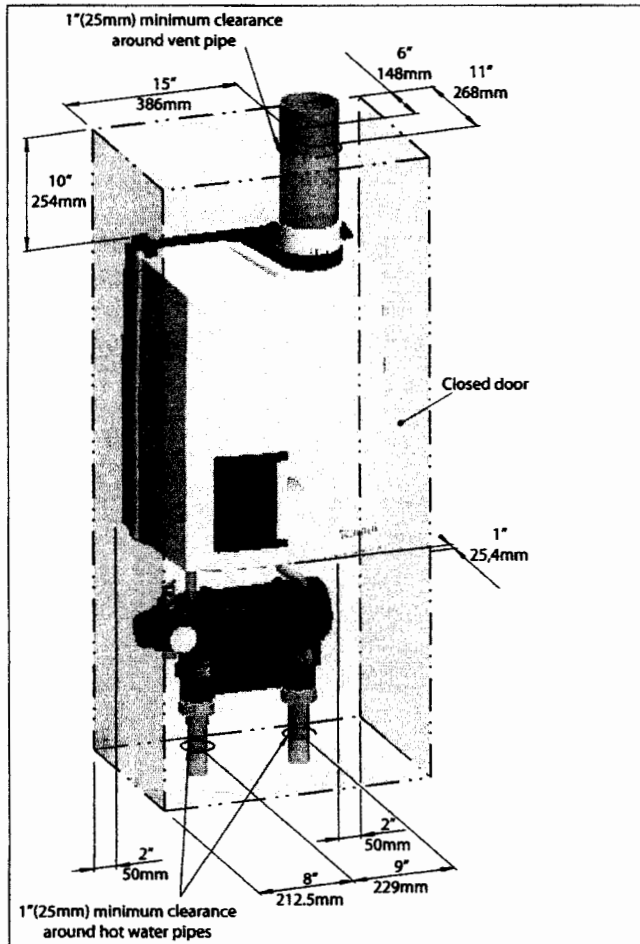

Closet installation

figure 17

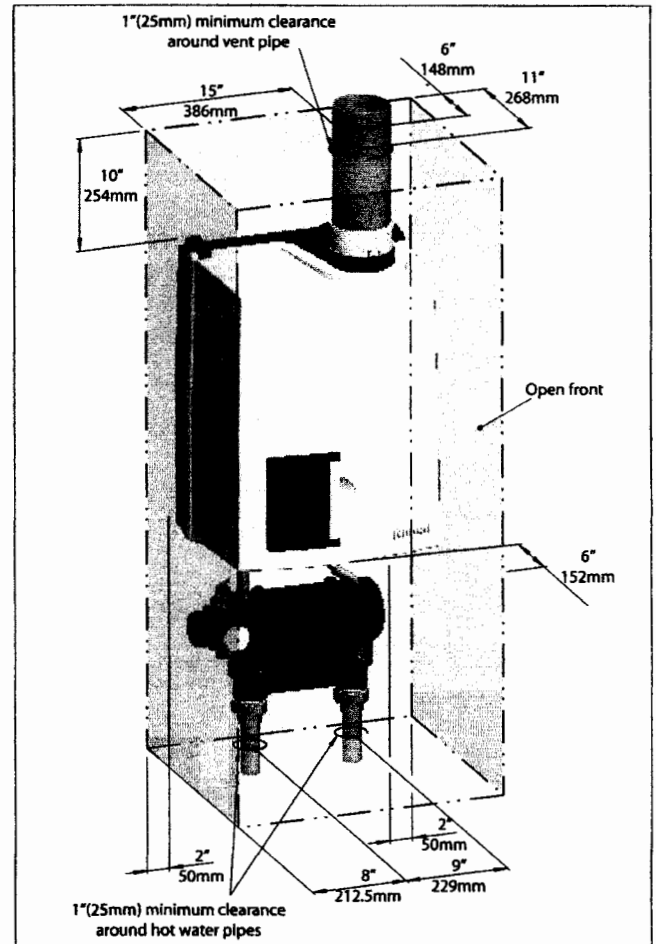

Alcove installation

figure 18