

City of Portland, Maine - Building or Use Permit Application 389 Congress Street, 04101, Tel: (207) 874-8703, FAX: 874-8716

Location of Construction: 424 Page St		Owner: Solovsky Limited Liability Co.		Phone:		Permit No: 971106	
Owner Address:		Lessee/Buyer's Name:		Phone:		Business Name:	
Contractor Name: Donaghan Woodworks		Address: 155 Pelmouth St Portland, ME 04102		Phone: 775-2683		<div style="border: 2px solid black; padding: 5px; text-align: center;"> PERMIT ISSUED Permit Issued: OCT 15 1997 CITY OF PORTLAND </div>	
Past Use: Office		Proposed Use: Same		COST OF WORK: \$ 10,540.00 FIRE DEPT. <input type="checkbox"/> Approved <input type="checkbox"/> Denied			
Proposed Project Description: Make Interior Renovations				Signature: <i>[Signature]</i> PEDESTRIAN ACTIVITIES DISTRICT (P.A.D.) Action: Approved <input type="checkbox"/> Approved with Conditions: <input type="checkbox"/> Denied <input type="checkbox"/>		Signature: _____ Date: _____	
Permit Taken By: <i>Nary Grossik</i>		Date Applied For: 07 October 1997					

1. This permit application does not preclude the Applicant(s) from meeting applicable State and Federal rules.
2. Building permits do not include plumbing, septic or electrical work.
3. Building permits are void if work is not started within six (6) months of the date of issuance. False information may invalidate a building permit and stop all work..

PERMIT ISSUED WITH REQUIREMENTS

CERTIFICATION

I hereby certify that I am the owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been authorized by the owner to make this application as his authorized agent and I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in the application is issued, I certify that the code official's authorized representative shall have the authority to enter all areas covered by such permit at any reasonable hour to enforce the provisions of the code(s) applicable to such permit

SIGNATURE OF APPLICANT <i>Nike Donaghan</i>		ADDRESS:		DATE: 07 October 1997		PHONE: 775-2683	
RESPONSIBLE PERSON IN CHARGE OF WORK, TITLE						PHONE: 775-2683	

PERMIT ISSUED
 Permit Issued:
OCT 15 1997
CITY OF PORTLAND

Zone: CBL: 032-N-012

Zoning Approval:

Special Zone or Reviews:

Shoreland
 Wetland
 Flood Zone
 Subdivision
 Site Plan maj minor mm

Zoning Appeal

Variance
 Miscellaneous
 Conditional Use
 Interpretation
 Approved
 Denied

Historic Preservation

Not in District or Landmark
 Does Not Require Review
 Requires Review

Action:

Approved
 Approved with Conditions
 Denied

Date: _____

CEO DISTRICT

City of Portland, Maine – Building or Use Permit Application 389 Congress Street, 04101, Tel: (207) 874-8703, FAX: 874-8716

Location of Construction: 424 Fore St		Owner: Soletsky Limited Liability Co.		Phone:	
Owner Address:		Lessee/Buyer's Name:		Phone:	
Contractor Name: Monaghan Woodworks		Address: 155 Falmouth St Ptld, ME 04102		Phone: 775-2683	
Past Use: Office		Proposed Use: Same		COST OF WORK: \$ 10,540.00 PERMIT FEE: \$ 75.00 FIRE DEPT.: <input checked="" type="checkbox"/> Approved <input type="checkbox"/> Denied INSPECTION: Use Group: Type: Signature: <i>[Signature]</i>	
Proposed Project Description: Make Interior Renovations <i>2nd floor over MA New John</i>		PEDESTRIAN ACTIVITIES DISTRICT (P.A.D.) Action: <input type="checkbox"/> Approved <input type="checkbox"/> Approved with Conditions <input type="checkbox"/> Denied Signature: _____ Date: _____			
Permit Taken By: Mary Gresik		Date Applied For: 07 October 1997			

Permit No: **971106**
PERMIT ISSUED
 Permit Issued:
OCT 15 1997
CITY OF PORTLAND

Zone: *B-3* CBL: 032-N-012
 Zoning Approval: *OK 10/9/97*
Special Zone or Reviews:
 Shoreland
 Wetland
 Flood Zone
 Subdivision
 Site Plan maj minor mm

Zoning Appeal
 Variance
 Miscellaneous
 Conditional Use
 Interpretation
 Approved
 Denied

Historic Preservation
 Not in District or Landmark
 Does Not Require Review
 Requires Review

Action:
 Approved
 Approved with Conditions
 Denied
 Date: *10/9/97*
MA

1. This permit application does not preclude the Applicant(s) from meeting applicable State and Federal rules.
2. Building permits do not include plumbing, septic or electrical work.
3. Building permits are void if work is not started within six (6) months of the date of issuance. False information may invalidate a building permit and stop all work..

PERMIT ISSUED WITH REQUIREMENTS

CERTIFICATION

I hereby certify that I am the owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been authorized by the owner to make this application as his authorized agent and I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in the application is issued, I certify that the code official's authorized representative shall have the authority to enter all areas covered by such permit at any reasonable hour to enforce the provisions of the code(s) applicable to such permit

<i>[Signature]</i>		07 October 1997	775-2683
SIGNATURE OF APPLICANT Mike Monaghan		DATE:	PHONE:
<i>BLAD FINLAY SITE SUPER - CHARLENDEN</i>			775-2683
RESPONSIBLE PERSON IN CHARGE OF WORK, TITLE			PHONE:

CEO DISTRICT 2
A. Powell

ELECTRICAL PERMIT

City of Portland, Me.



To the Chief Electrical Inspector, Portland Maine:
 The undersigned hereby applies for a permit to make electrical installations
 in accordance with the laws of Maine, the City of Portland Electrical Ordinance,
 National Electrical Code and the following specifications:

Date 10/9/97

Permit # 10626

LOCATION: 424 Fore St.

OWNER East Brown Cow ADDRESS 111 Commercial St.

							TOTAL	EACH FEE	
OUTLETS	2	Telephone		Data		CATV	2	.20	.40
	20	Receptacles	12	Switches	3	Smoke Detector	35	.20	6.00
FIBER OPTICS								15.00	
FIXTURES		incandescent		fluorescent				.20	
		fluorescent strip						.20	
SERVICES		Overhead				TTL AMPS TO	800	15.00	
		Underground					800	15.00	
Temporary Service		Overhead				AMPS OVER	800	25.00	
		Underground					800	25.00	
METERS		(number of)						1.00	
MOTORS		(number of)						2.00	
RESID/COM		Electric units						1.00	
HEATING	3	oil/gas units		Interior		Exterior	3	5.00	15.00
APPLIANCES		Ranges		Cook Tops		Wall Ovens		2.00	
Insta-Hot		Water heaters		Fans		Dryers		2.00	
Disposals		Dishwasher		Compactors		Others (denote)		2.00	
MISC. (number of)		Air Cond/win						3.00	
		Air Cond/cent				Pools		10.00	
		HVAC		EMS		Thermostat		5.00	
		Signs						10.00	
		Alarms/res						5.00	
		Alarms/com						15.00	
		Heavy Duty(CRKT)						2.00	
		Circus/Carnv						25.00	
		Alterations						5.00	
		Fire Repairs						15.00	
		E Lights						1.00	
		E Generators						20.00	
PANELS		Service		Remote		Main		4.00	
TRANSFORMER		0-25 Kva						5.00	
		25-200 Kva						8.00	
		Over 200 Kva						10.00	
TOTAL AMOUNT DUE									
MINIMUM FEE/COMMERCIAL 35.00								25.00	35.00


INSPECTION: Will be ready _____ or will call will call

CONTRACTORS NAME Place Electric Inc. MASTER LIC. # 10626
 ADDRESS 166 Summit St., Portland, ME 04103 LIMITED LIC. # _____
 TELEPHONE (207)- 797-9954

SIGNATURE OF CONTRACTOR

Her Nottingham

- Yellow walls NEW - NONE STRUCTURAL
- ALL OTHER WALLS EXISTING
- NO EXTERIOR WORK TO BE DONE
- TOILET SINK EXISTING SHOWER TO BE ADDED
- NEW CARPET (NEW OFFICES)
- NO CEILINGS (EXISTING)
- **PLUMBING + ELECTRICAL PERMIT TO BE POLLED.**
- **NO EXTERIOR SIGNAGE**

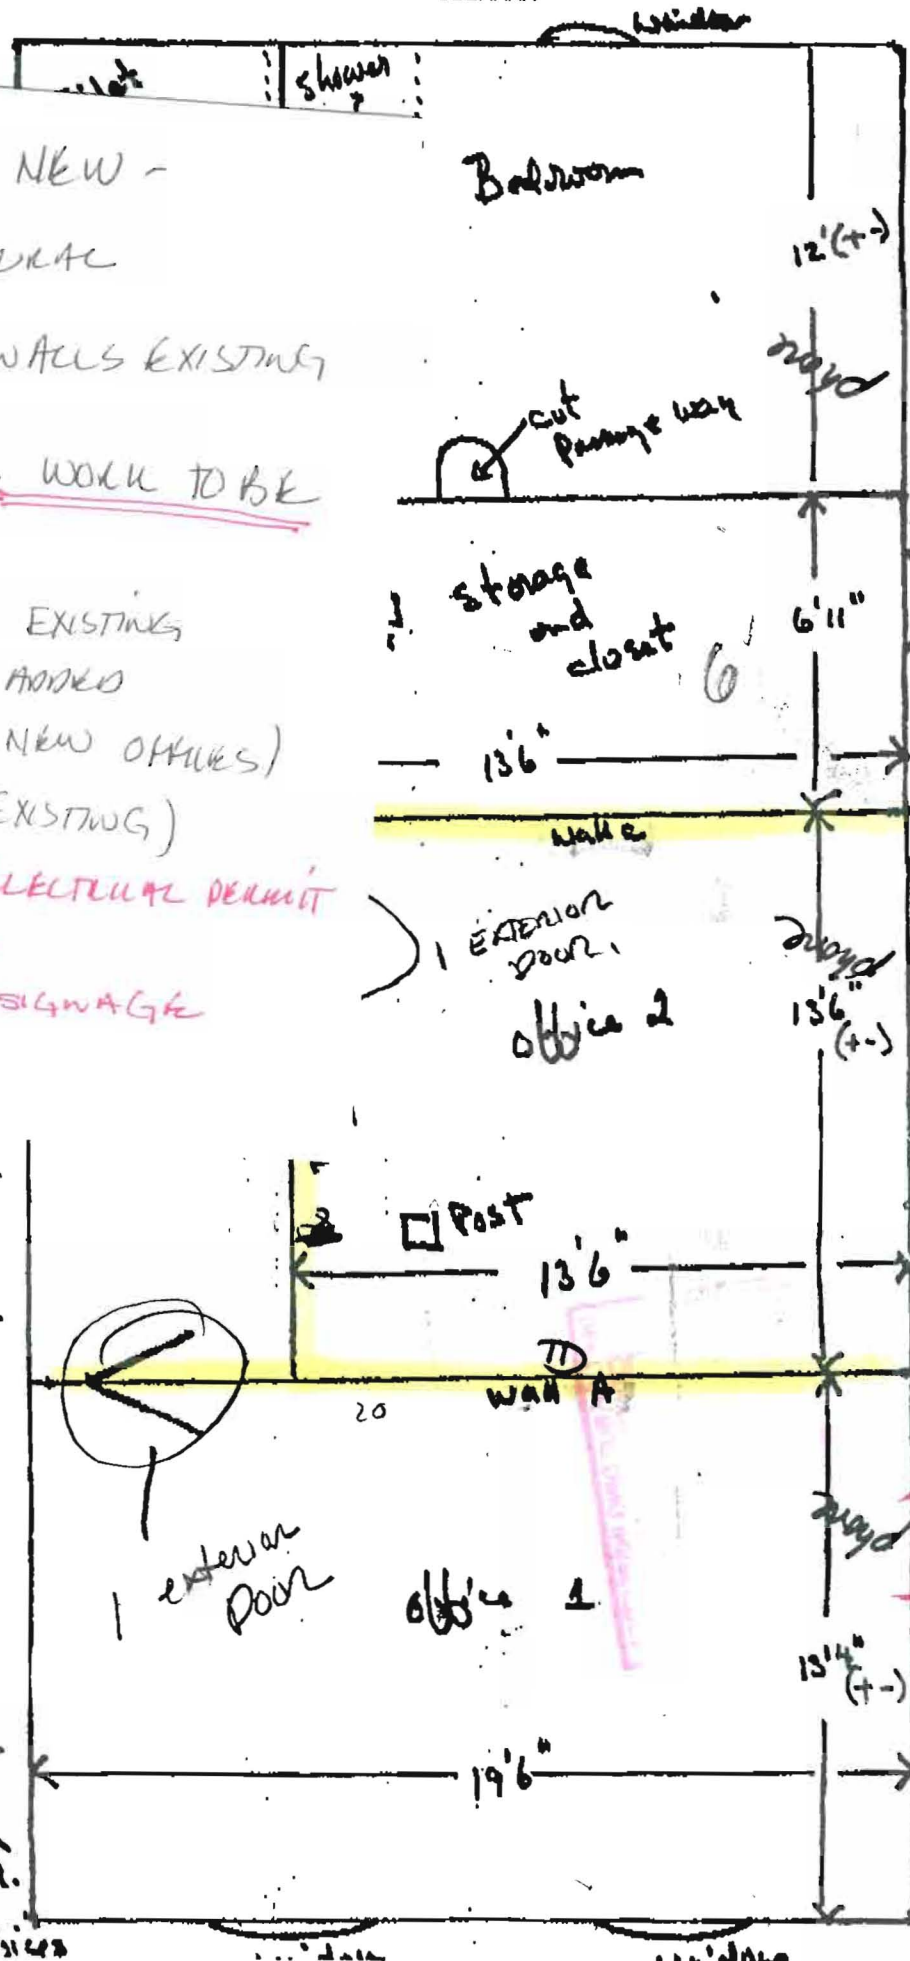

846-6263
Tom + Mary
Cushman

$$\begin{array}{r} 16 \\ 8 \overline{) 124} \\ \underline{8} \\ 44 \end{array}$$

$$\begin{array}{r} 1 \\ 20' \\ 22' \\ 14 \\ \underline{6} \\ 62 \end{array}$$

$$\begin{array}{r} 51 \\ 12 \overline{) 620} \\ \underline{60} \\ 20 \end{array}$$

Line escape
20 plates
50

75

- Must be insulated for sound.
- Wall B has been moved 4' (+ -) toward entrance door.
- Wall to be removed to sight of entrance door.
- Walls A, B & C need one electric outlet.
- Office 2 needs electric heat.
- Both office doors are double for sound-proofing.
- Motivation heater under sink may be too small.
- Need phone lines in offices

BUILDING PERMIT REPORT


DATE: 10/14/97 ADDRESS: 424 Fore St
REASON FOR PERMIT: renovations
BUILDING OWNER: Soletsky
CONTRACTOR: Morgan Woodworks
PERMIT APPLICANT: Miki Morgan APPROVAL: X/ X17 *26 DENIED
USE GROUP B BOCA 1996 CONSTRUCTION TYPE 3 B

CONDITION(S) OF APPROVAL

- X
1. This permit does not excuse the applicant from meeting applicable State and Federal rules and laws.
 2. Before concrete for foundation is placed, approvals from the Development Review Coordinator and Inspection Services must be obtained. (A 24 hour notice is required prior to inspection)
 3. Precaution must be taken to protect concrete from freezing.
 4. It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to verify that the proper setbacks are maintained.
 5. Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area by means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage side. (Chapter 4 Section 407.0 of the BOCA/1996)
 6. All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National Mechanical Code/1993).
 7. Sound transmission control in residential building shall be done in accordance with Chapter 12 section 1214.0 of the city's building code.
 8. Guardrails & Handrails: A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use Groups 42", except Use Group R which is 36". In occupancies in Use Group A, B, H-4, I-1, I-2 M and R and public garages and open parking structures, open guards shall have balusters or be of solid material such that a sphere with a diameter of 4" cannot pass through any opening. Guards shall not have an ornamental pattern that would provide a ladder effect. (Handrails shall be a minimum of 34" but not more than 38". Use Group R-3 shall not be less than 30", but not more than 38".)
 9. Headroom in habitable space is a minimum of 7'6".
 10. Stair construction in Use Group R-3 & R-4 is a minimum of 10" tread and 7 3/4" maximum rise. All other Use group minimum 11" tread, 7" maximum rise.
 11. The minimum headroom in all parts of a stairway shall not be less than 80 inches. (6' 8")
 12. Every sleeping room below the fourth story in buildings of use Groups R and I-1 shall have at least one operable window or exterior door approved for emergency egress or rescue. The units must be operable from the inside without the use of special knowledge or separate tools. Where windows are provided as means of egress or rescue they shall have a sill height not more than 44 inches (1118mm) above the floor. All egress or rescue windows from sleeping rooms shall have a minimum net clear opening height dimension of 24 inches (610mm). The minimum net clear opening width dimension shall be 20 inches (508mm), and a minimum net clear opening of 5.7 sq. ft.
 13. Each apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable when it exits directly from the apartment to the building exterior with no communications to other apartment units.
 14. All vertical openings shall be enclosed with construction having a fire rating of at least one (1) hour, including fire doors with self closer's.
 15. The boiler shall be protected by enclosing with (1) hour fire-rated construction including fire doors and ceiling, or by providing automatic extinguishment.
 16. All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the City's Building Code Chapter 9, Section 19, 920.3.2 (BOCA National Building Code/1996), and NFPA 101 Chapter 18 & 19. (Smoke detectors shall be installed and maintained at the following locations):
 - In the immediate vicinity of bedrooms
 - In all bedrooms

• In each story within a dwelling unit, including basements
In addition to the required AC primary power source, required smoke detectors in occupancies in Use Groups R-2, R-3 and I-1 shall receive power from a battery when the AC primary power source is interrupted. (Interconnection is required)

- 17. A portable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved agency and be of an approved type.
- 18. The Fire Alarm System shall be maintained to NFPA #72 Standard.
- 19. The Sprinkler System shall maintained to NFPA #13 Standard.
- 20. All exit signs, lights, and means of egress lighting shall be done in accordance with Chapter 10 Section & Subsections 1023. & 1024. Of the City's building code. (The BOCA National Building Code/1996)
- 21. **No construction or demolition work shall begin until you have obtained permits for dumpsters or containers. A work Stop Order shall be issued if this requirement is not met.**
- 22. Section 25-135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a permit to excavate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year".
- 23. The builder of a facility to which Section 4594-C of the Maine State Human Rights Act Title 5 MRSA refers, shall obtain a certification from a design professional that the plans commencing construction of the facility, the builder shall submit the certification to the Division of Inspection Services.
- 24. This permit does not excuse the applicant from obtaining any license which may be needed from the City Clerk's office.
- 25. Ventilation shall meet the requirements of Chapter 12 Sections 1210. of the City's Building Code.
- 26. All electrical, plumbing and HVAC permits must be obtained by a Master Licensed holders of their trade.
- 27. All requirements must be met before a final Certificate of Occupancy is issued.
- 28. All building elements shall meet the fastening schedule as per Table 2305.2 of the City's Building Code. (The BOCA National Building Code/1996).
- 29. Ventilation of spaces within a building shall be done in accordance with the City's Mechanical Code (The BOCA National Mechanical Code/1993).
- 30. _____
- 31. _____
- 32. _____
- 33. _____
- 34. _____


P. Samuel Hoffacs, Code Enforcement

cc: Lt. McDougall, PFD
Marge Schmuckal

