

1 DEMOLITION PLAN
 SCALE: 1/8" = 1'-0"
 2' 4' 8' 16'

PARTITIONS/WALLS KEY
 ———— EXISTING TO REMAIN
 - - - - - PARTITION/WALL TO BE REMOVED

AREA NOT IN CONTRACT


EXISTING DOOR AND FRAME TO BE REMOVED AND REINSTALLED. DOOR SCHEDULE INDICATES NEW LOCATION OF REINSTALLED DOORS.
 EXISTING BORROW LIGHT TO BE REMOVED AND REINSTALLED. BORROW LIGHT SCHEDULE INDICATES NEW LOCATION.

DEMOLITION GENERAL NOTES

- A. ITEMS INDICATED TO BE REMOVED AND SALVAGED REMAIN OWNER'S PROPERTY. REMOVE, CLEAN, AND DELIVER TO OWNER'S DESIGNATED STORAGE AREA.
- B. COMPLY WITH EPA REGULATIONS AND HAULING AND DISPOSAL REGULATIONS OF AUTHORITIES HAVING JURISDICTION.
- C. OWNER WILL OCCUPY PORTIONS OF BUILDING IMMEDIATELY ADJACENT TO SELECTIVE DEMOLITION AREA. CONDUCT SELECTIVE DEMOLITION SO OWNER'S OPERATIONS WILL NOT BE DISRUPTED.
- D. IT IS NOT EXPECTED THAT HAZARDOUS MATERIALS WILL BE ENCOUNTERED IN THE WORK. IF MATERIALS SUSPECTED OF CONTAINING HAZARDOUS MATERIALS ARE ENCOUNTERED, DO NOT DISTURB; IMMEDIATELY NOTIFY ARCHITECT AND OWNER. OWNER WILL REMOVE HAZARDOUS MATERIALS UNDER A SEPARATE CONTRACT.
- E. MAINTAIN SERVICES/SYSTEMS INDICATED TO REMAIN AND PROTECT THEM AGAINST DAMAGE DURING SELECTIVE DEMOLITION OPERATIONS. BEFORE PROCEEDING WITH DEMOLITION, PROVIDE TEMPORARY SERVICES/SYSTEMS THAT BYPASS AREA OF SELECTIVE DEMOLITION AND THAT MAINTAIN CONTINUITY OF SERVICES/SYSTEMS TO OTHER PARTS OF THE BUILDING.
- F. LOCATE, IDENTIFY, SHUT OFF, DISCONNECT, AND CAP OFF UTILITY SERVICES AND MECHANICAL/ELECTRICAL SYSTEMS SERVING AREAS TO BE SELECTIVELY DEMOLISHED.
- G. PROVIDE TEMPORARY BARRICADES AND OTHER PROTECTION REQUIRED TO PREVENT INJURY TO PEOPLE AND DAMAGE TO ADJACENT BUILDINGS AND FACILITIES TO REMAIN.
- H. PROVIDE AND MAINTAIN SHORING, BRACING, AND STRUCTURAL SUPPORTS AS REQUIRED TO PRESERVE STABILITY AND PREVENT MOVEMENT, SETTLEMENT, OR COLLAPSE OF CONSTRUCTION AND FINISHES TO REMAIN OR CONSTRUCTION BEING DEMOLISHED.
- I. PROVIDE TEMPORARY WEATHER PROTECTION TO PREVENT WATER LEAKAGE AND DAMAGE TO STRUCTURE AND INTERIOR AREAS.
- J. PROTECT WALLS, CEILINGS, FLOORS, AND OTHER EXISTING FINISH WORK THAT ARE TO REMAIN. ERECT AND MAINTAIN DUSTPROOF PARTITIONS. COVER AND PROTECT FURNITURE, FURNISHINGS, AND EQUIPMENT THAT HAVE NOT BEEN REMOVED.
- K. NEATLY CUT OPENINGS AND HOLES PLUMB, SQUARE, AND TRUE TO DIMENSIONS REQUIRED. USE CUTTING METHODS LEAST LIKELY TO DAMAGE CONSTRUCTION TO REMAIN OR ADJOINING CONSTRUCTION.
- L. PROMPTLY REMOVE DEMOLISHED MATERIALS FROM OWNER'S PROPERTY AND LEGALLY DISPOSE OF THEM. DO NOT BURN DEMOLISHED MATERIALS.
- M. ITEMS TO BE REMOVED:
 - 1. SPECIFIC ITEMS AS INDICATED BY KEYNOTE AND LEGEND.
 - 2. FINISH FLOORING EXCEPT AS NOTED.
- N. ITEMS TO BE SALVAGED FOR REUSE OR RETURNED TO OWNER:
 - 1. DOORS AND FRAMES.
 - 2. LIGHT FIXTURES.
 - 3. HVAC DIFFUSERS AND GRILLES.


DEMOLITION KEYNOTES -- THIS SHEET ONLY

- REMOVE PARTITION
- REMOVE DOOR AND FRAME
- REMOVE BORROW LIGHT
- REMOVE CASEWORK AND PLUMBING
- REMOVE PORTION OF GYPSUM BOARD CEILING
- FRAME IN AND FINISH 2 SKYLIGHT SHAFTS TO MATCH EXISTING ADJACENT CEILING.
- REMOVE AND RELOCATE FIRE EXTINGUISHER CABINET TO LOCATION DETERMINED BY OWNER.



Michael Charek Architects

25 Hartley Street
 Portland, Maine 04103
 (207) 761-0556

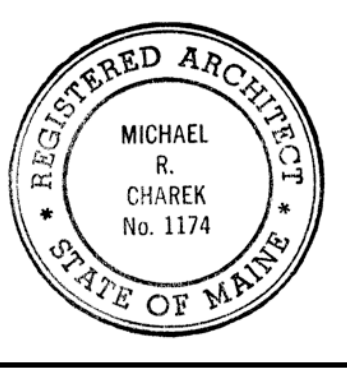

Second Floor Renovations

6 City Center
 Portland, ME 04101

Title
 DEMOLITION PLAN

Scale: 1/8"=1'-0"

Date: 8/16/16

Revisions
ISSUED FOR PERMIT

Sheet
D1