Location of Construction:	Owner:	, Hills	ry	Phone:	773-2962	Permit No: 9 8 0 6 8 6
Owner Address:	Lessee/Buyer's Name:	-	Phone:	Busines	sName:	PERMIT ISSUED
Contractor Name: Past Use:	Address: 40 Aldworth St Proposed Use:	Prld, H	Pho COST OF WO		797-0219 PERMIT FEE:	Permit Issued: JUN 2 6 1998
Proposed Project Description:			FIRE DEPT. Signature:	Denied	\$ 30.00 INSPECTION: Use Group! Type: Signature:	Zone: CBL: 061-C-011
Sepati wristing deck I roof			Action: Signature:	Approved	with Conditions: Date:	Special Zone or Reviews: Shoreland Wetland Flood Zone Subdivision
Permit Taken By:	Date Applied For:	12 Ju	me 1998		-	☐ Site Plan maj ☐minor ☐mm ☐
 This permit application does not preclude the Building permits do not include plumbing, Building permits are void if work is not start tion may invalidate a building permit and start 	septic or electrical work. ed within six (6) months of the date					☐ Variance ☐ Miscellaneous ☐ Conditional Use ☐ Interpretation ☐ Approved ☐ Denied
in so the	A. W.			PE WITH	RMIT ISSUED REQUIREMENTS	Historic Preservation ☐ Not in District or Landmark ☐ Does Not Require Review ☐ Requires Review Action:
I hereby certify that I am the owner of record of the authorized by the owner to make this application if a permit for work described in the application areas covered by such permit at any reasonable.	as his authorized agent and I agre is issued, I certify that the code offi	osed work the to conforticial's authoricial's	rm to all applicationized represent	ole laws of thative shall hather the permit	is jurisdiction. In additi	on, Denied
SIGNATURE OF APPLICANT	ADDRESS:		DATE:		PHONE:	1-1-1
RESPONSIBLE PERSON IN CHARGE OF WO	RK, TITLE				PHONE:	CEO DISTRICT

BUILDING PERMIT REPORT

DATE	address: 326 Spring ST. 861-6-611 SON FOR PERMIT: Depain existing deck groof. DING OWNER: H. McKinnen
REAS	SON FOR PERMIT: Depain exicting deck groof
BUIL	DING OWNER: H. McK12007
CONT	TRACTOR: Hap CLeary
PERM	ATT APPLICANT:
USE (GROUP 19.3 BOCA 1996 CONSTRUCTION TYPE 5.73
	CONDITION(S) OF APPROVAL
	Permit is being issued with the understanding that the following conditions are met:
Annr	oved with the following conditions: $\frac{\cancel{8}\cancel{10}\cancel{26}\cancel{29}}{\cancel{10}\cancel{36}\cancel{29}}$
Appr	over with the following conditions.
1.	This permit does not excuse the applicant from meeting applicable State and Federal rules and laws.
2.	Before concrete for foundation is placed, approvals from the Development Review Coordinator and Inspection Services must be obtained. (A 24 hour notice is required prior to inspection)
3.	Precaution must be taken to protect concrete from freezing.
4.	It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to verify that the proper setbacks are maintained.
5.	Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area by means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage side. (Chapter 4 Section 407.0 of the BOCA/1996)
6.	All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National Mechanical Code/1993).
7.	Sound transmission control in residential building shall be done in accordance with Chapter 12 section 1214.0 of the city's building code.
₹ 8.	Guardrails & Handrails: A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use Groups 42", except Use Group R which is 36". In occupancies in Use Group A, B, H-4, I-1, I-2 M and R and public garages and open parking structures, open guards shall have balusters or be of solid material such that a sphere with a diameter of 4" cannot pass through any opening. Guards shall not have an ornamental pattern that would provide a ladder effect. (Handrails shall be a minimum of 34" but not more than 38". Use Group R-3 shall not be less than 30", but not more than 38".) Handrail grip size shall have a circular cross section with an outside diameter of at least 1 1/4" and not greater than 2". Headroom in habitable space is a minimum of 7'6".
9. 41 0.	Stair construction in Use Group R-3 & R-4 is a minimum of 10" tread and 7 3/4" maximum rise. All other Use group minimum
	11" tread. 7" maximum rise.
11.	The minimum headroom in all parts of a stairway shall not be less than 80 inches. (6' 8") Every sleeping room below the fourth story in buildings of use Groups R and I-1 shall have at least one operable window or
12.	exterior door approved for emergency egress or rescue. The units must be operable from the inside without the use of special knowledge or separate tools. Where windows are provided as means of egress or rescue they shall have a sill height not more than 44 inches (1118mm) above the floor. All egress or rescue windows from sleeping rooms shall have a minimum net clear opening height dimension of 24 inches (610mm). The minimum net clear opening width dimension shall be 20 inches (508mm), and a minimum net clear opening of 5.7 sq. ft.
	and a manimum net clear opening of 3.7 sq. it.

7.

- Each apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable when it exits directly from the apartment to the building exterior with no communications to other apartment units.
- 14. All vertical openings shall be enclosed with construction having a fire rating of at lest one (1)hour, including fire doors with self closer's. (Over 3 stories in height requirements for fire rating is two (2) hours.)
- The boiler shall be protected by enclosing with (1) hour fire-rated construction including fire doors and ceiling, or by providing automatic extinguishment.
- 16. All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the

THIS IS NOT A PERMIT/CONSTRUCTION CANNOT COMMENCE UNTIL THE PERMIT IS ISSUED

Building or Use Permit Pre-Application Additions/Alterations/Accessory Structures To Detached Single Family Dwelling

In the interest of processing your application in the quickest possible manner, please complete the Information below for a Building or Use Permit.

NOTE**If you or the property owner owes real estate or personal property taxes or user charges on any property within the City, payment arrangements must be made before permits of any kind are accepted.

Location/A	ddress of Construction:	126 -	PRING	St	PERTLAND	1	
	or's Chart, Block & Lot Numb	er Lot# 011	Owner:	l\\	10:	Telephone#:	a/2
Chart#	6 Block# 67	Lot#	rilliari	1//	16 Kilvwon	773.2	10%
Owner's Ad	dress: 26 SPRIV	V6 ST	Lessee/Buyer's Name	(If Applicable	:)	S 2/00	\$ 30
Proposed Pr	oject Description:(Please be a	s specific as possible)	Calliny	dl	House		
HIM	Name, Address & Telephone CLEARY eparate permits are	40 ALDWOI		Pert	Rec'd 7970219		NU
•All con	•A!! plumbin •A!! plumbin Il Electrical Installatio C(Heating, Ventilation st Include the follow	ducted in compliant of the conduction of the conduction of the condition of the condition of the conduction of the condu	ince with the 1990 reed in compliance ith the 1996 Natio ioning) installation pplication: or Deed or Pur	6 B.O.C.A. e with the S onal Electri on must co	Building Code as State of Maine Plu ical Code as amen mply with the 199 d Sale Agreem	amended by Sect mbing Code. ded by Section 6-, 3 BOCA Mechan	ion 6-Art II. Art III.
	2		our Constructi Plot Plan (San		act, if availabl	e	
•	s expansion to the s The shape and dimension property lines. Structure pools, garages and any of Scale and required zoning	tructure, a com n of the lot, all exi s include decks po ther accessory stru	aplete plot plan sting buildings (if rehes, a bow wind actures.	(Site Plar any), the pro	n) must include: oposed structure an	d the distance from of overhangs, as we	
		4) Buil	ding Plans (Sa	mple Att	ached)	UN 1.2	1998
•	ete set of constructi Cross Sections w/Frami Floor Plans & Elevation Window and door sched	on drawings sh ng details (includin s ules	nowing all of the ag porches, decks v	e followin	g elements of c	onstruction:	V E
	Foundation plans with re			omonialies d	aguinmant guah as	furnace chira-co	/O. 200
	Electrical and plumbing equipment, HVAC equi			f work that i			
I hereby co	ertify that I am the Own	er of record of the			prosed work is auth	norized by the owner	er of record an


of this jurisdiction. In addition, if a permit for work described in this application is issued, I certify that the Code Official's authorized representative shall have the authority to enter all areas covered by this permit at any reasonable hour to enforce the provisions of the

codes applicable to this permit.

Signature of applicant:

Site Review Fee: \$150.00/Building Permit Fee: \$25.00 for the 1st \$1000.cost plus \$5.00 per \$1,000.00 construction cost thereafter.

that I have been authorized by the owner to make this application as his/her authorized agent. I agree to conform to all applicable laws

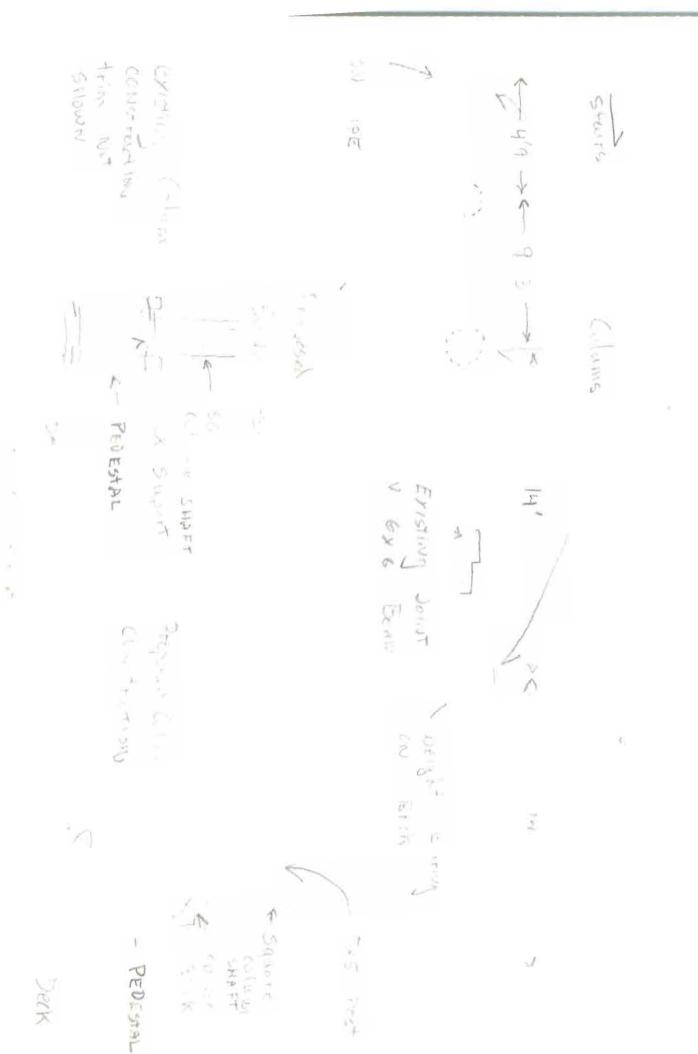

HAP CLEARY 40 ALDWORTH ST. PORTLAND, ME 04103 797-0219

JUNE 9, 1998

BUILDING PROPOSAL

- 1. DIG TWO 10" SONA TUBES WITH MUSHROOM FOOTING
- 2. POST DECK UP USING EXISTING DECK STRUCTURE, EXISTING IRON PIPE AND TWO NEW 10" SONA TUBES. POST TO BE 6" x 6" PRESSURE TREATED LUMBER.
- REPLACE ROTTEN BEAM WITH NEW 8" X 10" HEMLOCK BEAM SPLICED AT EXISTING SPLICE WITH A LAP JOINT AND A STEEL FLITCH PLATE.
- SLIDE A SOLID 5" X 5" POST INTO EXISTING COLUMN SHAFT AND REBUILD PEDESTAL TO MATCH EXISTING PEDESTALS TO CARRY WEIGHT FROM THE ROOF DIRECTLY TO THE DECK.
- RESTORE OR REPLACE AS NEEDED ALL LATTICE, TRIM, AND HAND RAILS IN EXISTING STYLE AS WAS PREVIOUSLY DONE NEXT DOOR .PICTURE ENCLOSED.

Barl J

N A


X X

DOLK


1 Hamilton

€ 6×2


LOT AND DWELLING SKETCH

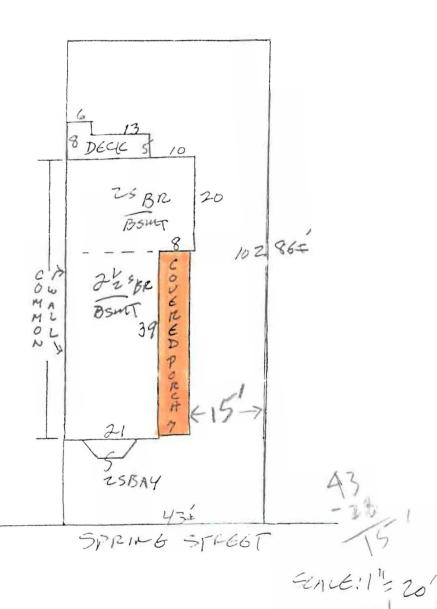

¶L.

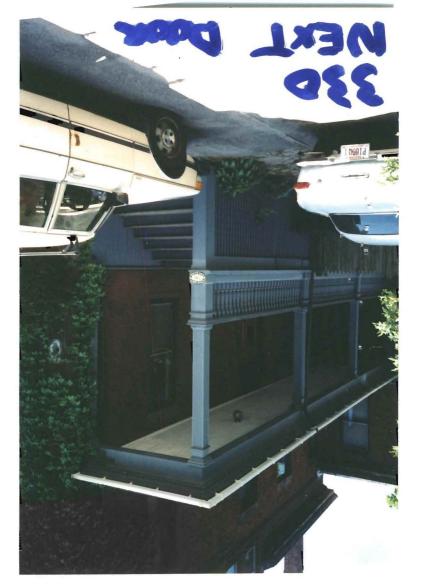



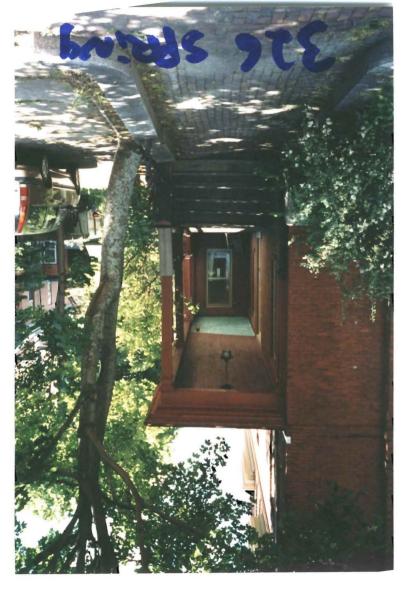



			Date
& alm	comforted men		Type Foundation: Framing: Plumbing: Final:
message - am y deep.	The god		
6/29/98 - Left 6/29/98 Holes 9/95/94 Mules	10/6/99		

provisions of the City's Building Code Chapter 9, Section 19, 920.3.2 (BOCA National Building Code/1996), and NFPA 101 Chapter 18 & 19. (Smoke detectors shall be installed and maintained at the following locations): In the immediate vicinity of bedrooms In all bedrooms In each story within a dwelling unit, including basements In addition to the required AC primary power source, required smoke detectors in occupancies in Use Groups R-2, R-3 and I-1 shall receive power from a battery when the AC primary power source is interrupted. (Interconnection is required) A portable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved agency and be of an approved type. The Fire Alarm System shall be maintained to NFPA #72 Standard. The Sprinkler System shall maintained to NFPA #13 Standard. All exit signs, lights, and means of egress lighting shall be done in accordance with Chapter 10 Section & Subsections 1023. & 1024. Of the City's building code. (The BOCA National Building Code/1996) Section 25-135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a permit to excavate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year". The builder of a facility to which Section 4594-C of the Maine State Human Rights Act Title 5 MRSA refers, shall obtain a certification from a design professional that the plans commencing construction of the facility, the builder shall submit the certification to the Division of Inspection Services. Ventilation shall meet the requirements of Chapter 12 Sections 1210. Of the City's Building Code. All electrical, plumbing and HVAC permits must be obtained by a Master Licensed holders of their trade. All requirements must be met before a final Certificate of Occupancy is issued. All building elements shall meet the fastening schedule as per Table 2305.2 of the City's Building Code. (The BOCA National Building Code/1996). Ventilation of spaces within a building shall be done in accordance with the City's Mechanical Code (The BOCA National Mechanical Code/1993). Please read and implement the attached Land Use-Zoning report requirements. This 15 To replace In Kind Only - Historic Proservation

Samuel Houses, Jode Enforcement

cc: Lt. McDougall, PFD Marge Schmuckal

17.

18.

19.

20.

21.

22.

23.

24.

25.

27.

28.

30.

31.

32.

× 29.

×26.