Location of Construction:	Owner:	4 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	Phone: 3 9.	Permit No: 980686
Owner Address:	Lessee/Buyer's Name:	Phone:	BusinessName:	PERMIT ISSUED
Contractor Name:	Address:	Phone: 2614, 21. 04133	75750_ 1 9	Permit Issued: JUN 2 6 1998
Past Use:	Proposed Use:	COST OF WORK:		
		FIRE DEPT. □ A _I □ De		Zono: CBI:
Proposed Project Description:		Signature: PEDESTRIAN AC'	Signature: Tivities DISTRICT (P.A.I	7
eje il er tating dock l i	(o n ⁽	Action: Ap	pproved pproved with Conditions: enied	Special-Zone or Reviews: Shoreland Wetland Flood Zone
		Signature:	Date:	☐ Subdivision☐ Site Plan maj ☐minor ☐mm ☐
Permit Taken By:	Date Applied For:	12 Jane 1998		Zoning Appeal
2. Building permits do not include plu	not started within six (6) months of the date			☐ Variance ☐ Miscellaneous ☐ Conditional Use ☐ Interpretation ☐ Approved ☐ Denied
	•		PERMIT ISSUED WITH REQUIREMENTS	Historic Preservation □ Not in District or Landmark □ Does Not Require Review □ Requires Review
				Action:
authorized by the owner to make this ap if a permit for work described in the app	CERTIFICATION cord of the named property, or that the proper plication as his authorized agent and I agree lication is issued, I certify that the code office sonable hour to enforce the provisions of the	sed work is authorized by the or to conform to all applicable licial's authorized representative	aws of this jurisdiction. In add e shall have the authority to ent	ition, ☐ Denied
		1.1 ouise 1991		
SIGNATURE OF APPLICANT	ADDRESS:	DATE:	PHONE:	
SIGNATURE OF ATTEICANT				

COM	IM	EN	TS.

6/29/98 Holes am 4' deep. & Allow 9/10/99 Charbed balusters raily lattice porch separad on Will 10/6/99 Close out conflicted mus
6/29/98 Holes are 4' deep. & allow
9/10/99 Charled Valusters raily lattice porch spared on Wil
6/6/99 Close out completed new

Inspection Record				
Туре	Date			
Foundation:				
Framing:				
Plumbing:				
Final:				
Other:				

BUILDING PERMIT REPORT

	OUT CO 320 SO CT WILL CALL
DATE	:29 June 78 ADDRESS: 326 3 Pring S1, 961-6-011
REAS	address: 326 Spring ST. 861-6-611 Son FOR PERMIT: Begain existing deck troof. DING OWNER: H. Mc Kinnen
BUIL	DING OWNER: H. McK12000
	TRACTOR: Hap CLeary
	2
	IIT APPLICANT: /
USE (GROUP 19.5 BOCA 1996 CONSTRUCTION TYPE 5.73
	CONDITION(S) OF APPROVAL
	Permit is being issued with the understanding that the following conditions are met:
	oved with the following conditions: $\frac{\cancel{8}\cancel{8}\cancel{10}\cancel{26}\cancel{29}$
Appr	oved with the following conditions:
1.	This permit does not excuse the applicant from meeting applicable State and Federal rules and laws.
2.	Before concrete for foundation is placed, approvals from the Development Review Coordinator and Inspection Services must be obtained. (A 24 hour notice is required prior to inspection)
3.	Precaution must be taken to protect concrete from freezing.
4.	It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to
5.	verify that the proper setbacks are maintained. Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from
J.	adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area by means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage side. (Chapter 4 Section 407.0 of the BOCA/1996)
6.	All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National Mechanical Code/1993).
7.	Sound transmission control in residential building shall be done in accordance with Chapter 12 section 1214.0 of the city's building code.
₹ 8.	Guardrails & Handrails: A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use Groups 42", except Use Group R which is 36". In occupancies in Use Group A, B, H-4, I-1, I-2 M and R and public garages and open parking structures, open guards shall have balusters or be of solid material such that a sphere with a diameter of 4" cannot pass through any opening. Guards shall not have an ornamental pattern that would provide a ladder effect. (Handrails shall be a minimum of 34" but not more than 38". Use Group R-3 shall not be less than 30", but not more than 38".) Handrail grip size shall have a circular cross section with an outside diameter of at least 1 1/4" and not greater than 2". Headroom in habitable space is a minimum of 7'6".
9. ⊀ 10.	Stair construction in Use Group R-3 & R-4 is a minimum of 10" tread and 7 3/4" maximum rise. All other Use group minimum
.,	11" tread. 7" maximum rise.
11.	The minimum headroom in all parts of a stairway shall not be less than 80 inches. (6'8")
12.	Every sleeping room below the fourth story in buildings of use Groups R and I-1 shall have at least one operable window or exterior door approved for emergency egress or rescue. The units must be operable from the inside without the use of special knowledge or separate tools. Where windows are provided as means of egress or rescue they shall have a sill height not more than 44 inches (1118mm) above the floor. All egress or rescue windows from sleeping rooms shall have a minimum net clear
	opening height dimension of 24 inches (610mm). The minimum net clear opening width dimension shall be 20 inches (508mm),
12	and a minimum net clear opening of 5.7 sq. ft.
13.	Each apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable when it
14.	exits directly from the apartment to the building exterior with no communications to other apartment units. All vertical openings shall be enclosed with construction having a fire rating of at lest one (1)hour, including fire doors with self
	closer's. (Over 3 stories in height requirements for fire rating is two (2) hours.)
15.	The boiler shall be protected by enclosing with (1) hour fire-rated construction including fire doors and ceiling, or by providing

All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the

automatic extinguishment.

16.

provisions of the City's Building Code Chapter 9, Section 19, 920.3.2 (BOCA National Building Code/1996), and NFPA 101 Chapter 18 & 19. (Smoke detectors shall be installed and maintained at the following locations):

- In the immediate vicinity of bedrooms
- In all bedrooms
- In each story within a dwelling unit, including basements

In addition to the required AC primary power source, required smoke detectors in occupancies in Use Groups R-2, R-3 and I-1 shall receive power from a battery when the AC primary power source is interrupted. (Interconnection is required)

- A portable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved agency and be of an 17. approved type.
- The Fire Alarm System shall be maintained to NFPA #72 Standard. 18.
- The Sprinkler System shall maintained to NFPA #13 Standard. 19.
- All exit signs, lights, and means of egress lighting shall be done in accordance with Chapter 10 Section & Subsections 1023. & 20. 1024. Of the City's building code. (The BOCA National Building Code/1996)
- 21. Section 25-135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a permit to excavate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year".
- 22. The builder of a facility to which Section 4594-C of the Maine State Human Rights Act Title 5 MRSA refers, shall obtain a certification from a design professional that the plans commencing construction of the facility, the builder shall submit the certification to the Division of Inspection Services.
- Ventilation shall meet the requirements of Chapter 12 Sections 1210. Of the City's Building Code. 23.
- All electrical, plumbing and HVAC permits must be obtained by a Master Licensed holders of their trade. 24.
- All requirements must be met before a final Certificate of Occupancy is issued. 25.
- All building elements shall meet the fastening schedule as per Table 2305.2 of the City's Building Code. (The BOCA National X 26. Building Code/1996).
 - 27. Ventilation of spaces within a building shall be done in accordance with the City's Mechanical Code (The BOCA National

This 15 To	replace	Land Use-Zoning re	nly-H	ISTORIC Pr	-aservaTion
					
					-

cc: Lt. McDougall, PFD

ode Enforcement

Marge Schmuckal

THIS IS NOT A PERMIT/CONSTRUCTION CANNOT COMMENCE UNTIL THE PERMIT IS ISSUED

Building or Use Permit Pre-Application Additions/Alterations/Accessory Structures

To Detached Single Family Dwelling

In the interest of processing your application in the quickest possible manner, please complete the Information below for a Building or Use Permit.

NOTE**If you or the property owner owes real estate or personal property taxes or user charges on any property within the

City, payment arrangements must be made before permits of any kind are accepted.

Pertland

3PRING

Location/Address of Construction:

	·		
Tax Assessor's Chart, Block & Lot Number	Owner:		Telephone#:
Chart# 06 Block# G Lot# Oll	Hillary	McKinnon	773-2962
Owner's Address:	Lessee/Buyer's Name (I	f Applicable)	Cost Of Work: Fee
326 SPRING ST			\$ 2100 \$50
Proposed Project Description: (Please be as specific as possible POOL & STORY + Roo Fro	0 11-	Il House	
Contractor's Name, Address & Telephone HAP CLEARY WO ALDWO	ort st	Part 7970219	d By:
Separate permits are required for In	nternal & External	Plumbing, HVAC and	Electrical installation.
•All construction must be conducted in comp			
•A!! plumbing must be cond			
•All Electrical Installation must comply •HVAC(Heating, Ventilation and Air Cond			
You must Include the following with you	_	must comply with the 19	93 BOCA Mechanical Code.
•	* *	hase and Sale Agreem	ant "
		nase and Sale Agreen n Contract, if availab	
,			ile .
	Plot Plan (Samp	•	
If there is expansion to the structure, a co			
 The shape and dimension of the lot, all e property lines. Structures include decks p 			
pools, garages and any other accessory si			
Scale and required zoning district setbac			TIY OF PORTLAND, ME
4) Bu	ilding Plans (San	iple Attached)	D 111 2 1000
A complete set of construction drawings			Jun 1 2 1998
Cross Sections w/Framing details (include)	ling porches, decks w/	railings, and accessory stru	(tarte)
• Floor Plans & Elevations	,		
 Window and door schedules 		•	
• Foundation plans with required drainage			
 Electrical and plumbing layout. Mechani 	cal drawings for any sp	pecialized equipment such a	s furnaces, chimneys, gas

equipment, HVAC equipment (air handling) or other types of work that may require special review must be included. Certification

I hereby certify that I am the Owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been authorized by the owner to make this application as his/her authorized agent. I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in this application is issued, I certify that the Code Official's authorized representative shall have the authority to enter all areas covered by this permit at any reasonable hour to enforce the provisions of the

codes applicable to this permit.		
Signature of applicant:	Cu	Date:
Site Review Fee: \$150.00/Building Permit Fee: \$2	5.00 for the 1st \$1000.cost plus	\$5.00 per \$1,000.00 construction cost thereafter.

HAP CLEARY 40 ALDWORTH ST. PORTLAND, ME 04103 797-0219

JUNE 9, 1998

BUILDING PROPOSAL


- 1. DIG TWO 10" SONA TUBES WITH MUSHROOM FOOTING
- 2. POST DECK UP USING EXISTING DECK STRUCTURE, EXISTING IRON PIPE AND TWO NEW 10" SONA TUBES. POST TO BE 6" x 6" PRESSURE TREATED LUMBER.
- 3. REPLACE ROTTEN BEAM WITH NEW 8" X 10" HEMLOCK BEAM SPLICED AT EXISTING SPLICE WITH A LAP JOINT AND A STEEL FLITCH PLATE.
- 4. SLIDE A SOLID 5" X 5" POST INTO EXISTING COLUMN SHAFT AND REBUILD PEDESTAL TO MATCH EXISTING PEDESTALS TO CARRY WEIGHT FROM THE ROOF DIRECTLY TO THE DECK.
- 5. RESTORE OR REPLACE AS NEEDED ALL LATTICE, TRIM, AND HAND RAILS IN EXISTING STYLE AS WAS PREVIOUSLY DONE NEXT DOOR .PICTURE ENCLOSED.

N X 100 - 100 W De K

.

o Pl ţ A PRESTAL * 13 7 7 PEDETAN

LOT AND DWELLING SKETCH

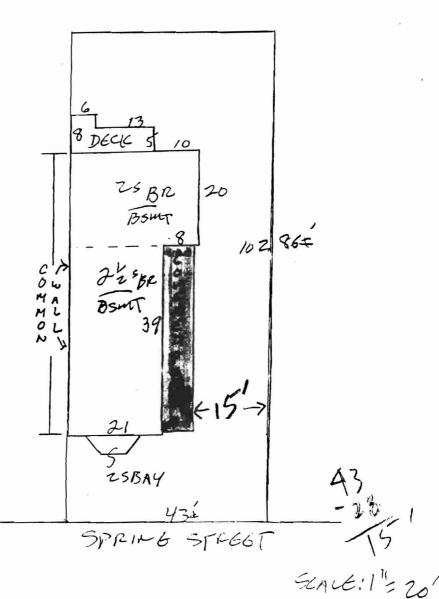

€L

Stealing Appraisal Company