


# W

## Access Doors— High Temp

Access Doors For Round and Flat Duct Work

### Specifications

- Tested to 20" w.g., with no leakage noted.
- Available in 10x6 and 16x12.
- Metal Thickness: 10x06 16 ga. Black iron
- 16x12 16 ga. Black iron
- Ceramic fiber rope (1,000° max) or ceramic fiber gasket (2,300°, Meets NFPA 96) ensures an air tight seal
- Zinc coated wing nuts are easily turned by hand
- Self adhesive template is provided for easy installation.
- Zinc coated conical springs installed between the inner and outer door.

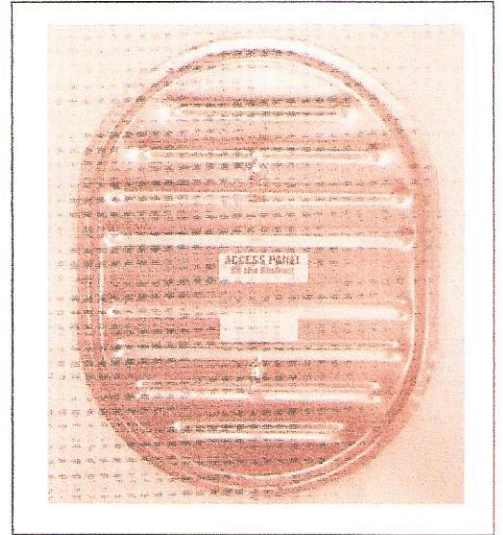


### Packaging

- Access Doors are sold as single units.

### Profile

- Available sizes: 10x06 Flat  
16x12 Flat  
10x06x 6" through 30"  
16x12x 18" through 60"

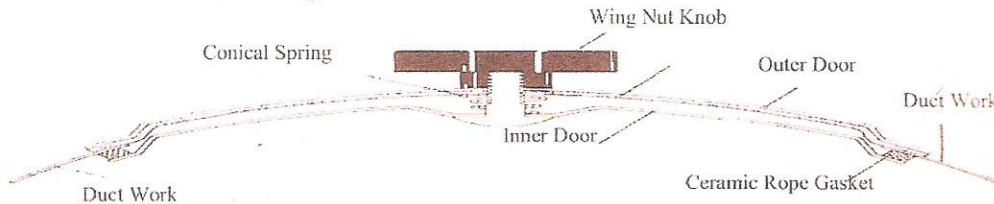

### Installation Instructions

1. Adhere self adhesive template to ductwork.
2. Using a pair of sheet metal snips, cut out the template.
3. Unscrew knobs of door and insert into the opening
4. Tighten knobs.

**W**  
**C.L. WARD**  
& FAMILY INC.



888.973.7600  
www.clward.com