City of Portland, Maine - Building or Use Permit Application 389 Congress Street, 04101, Tel: (207) 874-8703, FAX: 874-8716 Location of Construction: Owner: Phone: Permit No: 761-7900 222 St. John Street #114 04102 First Allied Realty Assoc. Owner Address: Lessee/Buyer's Name: Phone: BusinessName: 222 St. John St. 103 Portland, ME 04 Permit Issued: Contractor Name: Address: Phone: 0 1999 COST OF WORK: PERMIT FEE: Past Use: Proposed Use: \$ 30.00 Massage Therapy Therapy FIRE DEPT. Approved INSPECTION: ☐ Denied Use Group: Type: Zone: CBL064-A-002 Signature: Signature: Zoning Approval: Proposed Project Description: PEDESTRIAN ACTIVITIES DISTRICT (P.A.D.) Change of Use to Allow Massage Therapy Action: Approved Special Zone or Reviews: Approved with Conditions: ☐ Shoreland Denied □Wetland ☐ Flood Zone ☐ Subdivision Signature: Date: ☐ Site Plan maj ☐minor ☐mm ☐ Permit Taken By: Date Applied For: SP 9-7-99 Zoning Appeal □ Variance This permit application does not preclude the Applicant(s) from meeting applicable State and Federal rules. ☐ Miscellaneous Building permits do not include plumbing, septic or electrical work. ☐ Conditional Use Building permits are void if work is not started within six (6) months of the date of issuance. False informa-□ Interpretation Daniella M. Caron ☐ Approved sassSend To: tion may invalidate a building permit and stop all work.. 222 St. John Street ☐ Denied Suite # Historic Preservation □ Not in District or Landmark Portland, NE 04102 ☐ Does Not Require Review ☐ Requires Review PERMIT ISSUED Action: WITH REQUIREMENTS CERTIFICATION ☐ Appoved Approved with Conditions I hereby certify that I am the owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been ☐ Denied authorized by the owner to make this application as his authorized agent and I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in the application is issued, I certify that the code official's authorized representative shall have the authority to enter all Date: areas covered by such permit at any reasonable hour to enforce the provisions of the code(s) applicable to such permit SIGNATURE OF APPLICANT ADDRESS: DATE: PHONE: RESPONSIBLE PERSON IN CHARGE OF WORK, TITLE PHONE:

White-Permit Desk Green-Assessor's Canary-D.P.W. Pink-Public File Ivory Card-Inspector

CEO DISTRICT



CITY OF PORTLAND, MAINE

Department of Building Inspection

Certificate of Occupancy

LOCATION 222 St. John Street CBL# 064-A-002

First Allied Realty Assoc. Issued to

Date of Issue 9-16-99

This is to certify that the building, premises, or part thereof, at the above location, built - altered changed as to use under Building Permit No. 990976, has had final inspection, has been found to conform substantially to requirements of Zoning Ordinance and Building Code of the City, and is hereby approved for occupancy or use, limited or otherwise, as indicated below.

PORTION OF BUILDING OR PREMISES

APPROVED OCCUPANCY

Suite 114

Massage therapy

Type 3 B

Limiting Conditions:

This certificate supersedes certificate issued

Prior to 9-15-99

Approved:

(Date)

Inspector

Inspector of Buildings

Notice: This certificate identifies lawful use of building or premises, and ought to be transferred from owner to owner when property changes hands. Copy will be furnished to owner or lessee for one dollar.

THIS IS NOT A PERMIT/CONSTRUCTION CANNOT COMMENCE UNTIL THE PERMIT IS ISSUED

Building or Use Permit Pre-Application Attached Single Family Dwellings/Two-Family Dwelling

Multi-Family or Commercial Structures and Additions Thereto

In the interest of processing your application in the quickest possible manner, please complete the Information below for a Building or Use Permit.

NOTE**If you or the property owner owes real estate or personal property taxes or user charges on ANY PROPERTY within the City, payment arrangements must be made before permits of any kind are accepted.

V	/				14	
Location/Addressof Construction (include Portion of Building)	222	St. 0	John Sc	< #	6410	2
Total Square Footage of Proposed Structure		Square Footage of Lot				
Tax Assessor's Chart, Block & Lot Number	Owner:	1011	0 1 10	IC.	Telephone#:	000
Chart# 064 Block# P Lot# 002	FIN	+ H/1184	Realty Asse	6.	761-7	700
Owner's Address:	Lessee/Buyer's Name (If Applicable)			Cost Of Work: Fee		
222 St. John Street 103 Partland me	Davielle In Casan			\$	Ô	\$ 300
Proposed Project Description:(Please he as specific as possible)				27.6		
Change &	Clap	to al	Clas VI	Phi	apy	Ď.
Contractor's Name, Address & Telephone					0	Rec'd By
Current Use: Thropy		Proposed Use:	massage	th	empy	
	ance with the leted in complicated in complicated in the 1996 Notice of the leter o	1996 B.O.C.A. Ince with the Stational Electrolation must contract and Station Contract And St	Building Code a State of Maine Pl ical Code as ame omply with the I Sale Agreement et, if available	s ame umbi nded 993 E	ended by Seing Code. by Section BOCA Mech	6-Art III.
Unless exempted by State Law, construc			igned by a regist	ered	design profe	sional.
complete set of construction drawings showing all	of the following	g elements of o	construction:	F	11 15	
Cross Sections w/Framing details (includi	ng porches, dec	ks w/ railings,	and accessory stru	cture	s)	
Floor Plans & Elevations Window and door schedules						

application is issued, I certify that the Code Official's authorized representative shall have the authority to enter all areas covered by this permit at any reasonable hour to enforce the provisions of the codes applicable to this permit.

| Signature of applicant: | Date: 9/7/99

Foundation plans with required drainage and dampproofing

Building Permit Fee: \$30.00 for the 1st \$1000.cost plus \$6.00 per \$1,000.00 construction cost thereafter.

Additional Site review and related fees are attached on a separate addendum

FIRST ALLIED REALTY ASSOCIATES, INC.

September 1, 1999

City of Portland Nadine Beth Williamson Office Manager 389 Congress Street Portland, Maine 04102

Re: Business License

CBL: 064-A-002


Dear Ms. Williamson:

We would like to inform you that Ms. Danielle Caron per her lease agreement is permitted to perform massage therapy in suite 114, Railroad Center Building.

If you require additional information, please do hesitate to contact our office at 761-7900, ext. 21.

Sincerely, Water and Datell

Valerie Oakes Property Manager

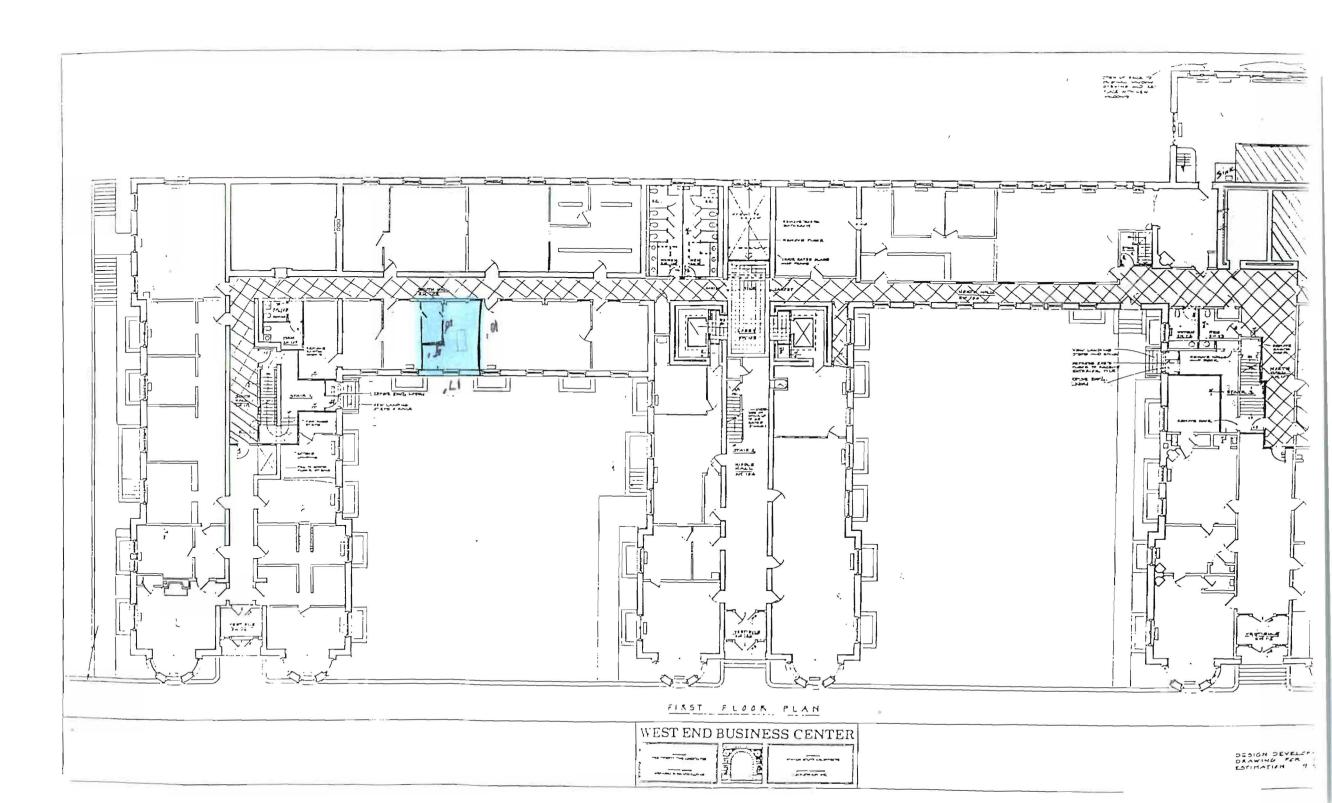

BUILDING PERMIT REPORT

DATE: \(\frac{7SepT.9}{2} \) ADDRESS: \(\frac{222}{222} \) ST. \(\sqrt{369} \) ST. \(\sqrt{64} \) CBL: \(\frac{764}{4} \) A-\(\frac{62}{2} \) REASON FOR PERMIT: \(\frac{Cmage}{2} \) of \(\frac{4Se}{4Se} \) SOC

PERMIT APPLICANT: \(\sqrt{2} \) \(\frac{27}{4Se} \) \(\frac{1}{2} \) \(\frac{27}{4Se} \) \(\frac{1}{2} \) \(\frac{27}{4Se} \) \(\frac{27}{4Se} \) \(\frac{1}{2} \) \(\frac{27}{4Se} \) \(\frac{1}{2} \) \(\frac{27}{4Se} \) \(\frac{27}{4Se}

X1. 3

Approved with the following conditions:

1. This permit does not excuse the applicant from meeting applicable State and Federal rules and laws.

Before concrete for foundation is placed, approvals from the Development Review Coordinator and Inspection Services must be obtained.

(A 24 hour notice is required prior to inspection)"

ALL LOT LINES SHALL BE CLEARLY MARKED

BEFORE CALLING."

- 3. Foundation drain shall be placed around the perimeter of a foundation that consists of gravel or crushed stone containing not more than 10 percent material that passes through a No. 4 sieve. The drain shall extend a minimum of 12 inches beyond the outside edge of the footing. The thickness shall be such that the bottom of the drain is not higher than the bottom of the base under the floor, and that the top of the drain is not less than 6 inches above the top of the footing. The top of the drain shall be covered with an approved filter membrane material. Where a drain tile or perforated pipe is used, the invert of the pipe or tile shall not be higher than the floor elevation. The top of joints or top of perforations shall be protected with an approved filter membrane material. The pipe or tile shall be placed on not less than 2" of gravel or crushed stone, and shall be covered with not less than 6" of the same material. Section 1813.5.2
- 4. Foundations anchors shall be a minimum of ½" in diameter, 7" into the foundation wall, minimum of 12" from corners of foundation and a maximum 6' o.c. between bolts. (Section 2305.17)
- 5. Waterproofing and dampproofing shall be done in accordance with Section 1813.0 of the building code.
- 6. Precaution must be taken to protect concrete from freezing. Section 1908.0
- 7. It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to verify that the proper setbacks are maintained.
- 8. Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area by means of ½ inch gypsum board or the equivalent applied to the garage side. (Chapter 4, Section 407.0 of the BOCA/1996)
- 9. All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National Mechanical Code/1993). Chapter 12 & NFPA 211
- 10. Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 1214.0 of the City's Building Code.
- Guardrails & Handrails: A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use Groups 42", except Use Group R which is 36". In occupancies in Use Group A, B, H-4, I-1, I-2, M and R and public garages and open parking structures, open guards shall have balusters or be of solid material such that a sphere with a diameter of 4" cannot pass through any opening. Guards shall not have an ornamental pattern that would provide a ladder effect. (Handrails shall be a minimum of 3e4" but not more than 38". Use Group R-3 shall not be less than 30", but not more than 38".) Handrail grip size shall have a circular cross section with an outside diameter of at least I ¼" and not greater than 2". (Sections 1021 & 1022.0) Handrails shall be on both sides of stairway. (Section 1014.7)
- 12. Headroom in habitable space is a minimum of 7'6". (Section 1204.0)
- 13. Stair construction in Use Group R-3 & R-4is a minimum of 10" tread and 7 3/4" maximum rise. All other Use Group minimum 11" tread, 7" maximum rise. (Section 1014.0)
- 14. The minimum headroom in all parts of a stairway shall not be less than 80 inches. (6'8") 1014.4
- Every sleeping room below the fourth story in buildings of Use Groups R and I-1 shall have at least one operable window or exterior door approved for emergency egress or rescue. The units must be operable from the inside without the use of special knowledge or separate tools. Where windows are provided as means of egress or rescue they shall have a sill height not more than 44 inches (1118mm) above the floor. All egress or rescue windows from sleeping rooms shall have a minimum net clear opening height dimension of 24 inches (610mm). The minimum net clear opening width dimension shall be 20 inches (508mm), and a minimum net clear opening of 5.7 sq. ft. (Section 1018.6)

16.	Each apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable when it exits
17.	directly from the apartment to the building exterior with no communications to other apartment units. (Section 1010.1) All vertical openings shall be enclosed with construction having a fire rating of at least one (1) hour, including fire doors with self
	closer's. (Over 3 stories in height requirements for fire rating is two (2) hours.) (Section 710.0)
18.	The boiler shall be protected by enclosing with (1)hour fire rated construction including fire doors and ceiling, or by providing automatic extinguishment. (Table 302.1.1)
19.	All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the City's Building Code Chapter 9, Section 920.3.2 (BOCA National Building Code/1996), and NFPA 101 Chapter 18 &19. (Smoke detectors shall be installed and maintained at the following locations): In the immediate vicinity of bedrooms
	• In all bedrooms
	• In each story within a dwelling unit, including basements In addition to the required AC primary power source, required smoke detectors in occupancies in Use Groups R-2, R-3 and I-1 shall receive power from a battery when the AC primary power source is interrupted. (Interconnection is required) Section 920.3.2.
20.	A portable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved agency and be of an approved type. (Section 921.0)
21.	The Fire Alarm System shall maintained to NFPA #72 Standard.
22.	The Sprinkler System shall maintained to NFPA #13 Standard.
23.	All exit signs, lights and means of egress lighting shall be done in accordance with Chapter 10 Section & Subsections 1023.0 & 1024.0 of the City's Building Code. (The BOCA National Building Code/1996)
24.	Section 25-135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a permit to excavate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year".
25.	The builder of a facility to which Section 4594-C of the Maine State Human Rights Act Title 5 MRSA refers, shall obtain a certification from a design professional that the plans commencing construction of the facility, the builder shall submit the certification the Division of Inspection Services.
26.	Ventilation shall meet the requirements of Chapter 12 Sections 1210.0 of the City's Building Code. (Crawl spaces & attics).
χ 27.	All electrical, plumbing and HVAC permits must be obtained by a Master Licensed holders of their trade. No closing in of walls until
7	all electrical (min.72 hours notice) and plumbing inspections have been done.
28.	All requirements must be met before a final Certificate of Occupancy is issued.
29.	All building elements shall meet the fastening schedule as per Table 2305.2 of the City's Building Code (the BOCA National Building Code/1996).
30.	Ventilation of spaces within a building shall be done in accordance with the City's Mechanical Code (The BOCA National Mechanical
(21)	Code/1993). (Chapter M-16) Please read and implement the attached Land Use Zoning report requirements. Sep 2 to Perm & Weeded for Any Ne
(31) 32.	Prince outline and notehing shall be done in accordance with Sections 2205 4.4. 2205 5.1 and 2205 5.2 after Cityle Building Code.
¥ 33.	Boring, cutting and notching shall be done in accordance with Sections 2305.4.4, 2305.5.1 and 2305.5.3 of the City's Building Code.
34.	All signage, shall be done in accordance with Section 3102.0 signs of the City's Building Code, (The BOCA National Building Code

1996). 35.

38.

ALMITS R. Building Inspector Lt/Mi Dougell, PFD Marge Schmuckal, Zoning Administrator

PSH 7:24:99

36.

37.

^{**}On the basis of plans submitted and conditions placed on these plans any deviations shall require a separate approval.