



WALL DETAILS

SIDE WALLS STAY AS IS WITH NEW WINDOWS + DOOR
 FRONT WALL REYNOLDS TAKE OUT ON EXISTING EXISTING AXIS
 ABOVE TO FLOOR HEADER SUPPORT. R/S PLUS R/S
 REYNOLDS TAKE OUT ON EXISTING EXISTING AXIS
 REYNOLDS TAKE OUT ON EXISTING EXISTING AXIS

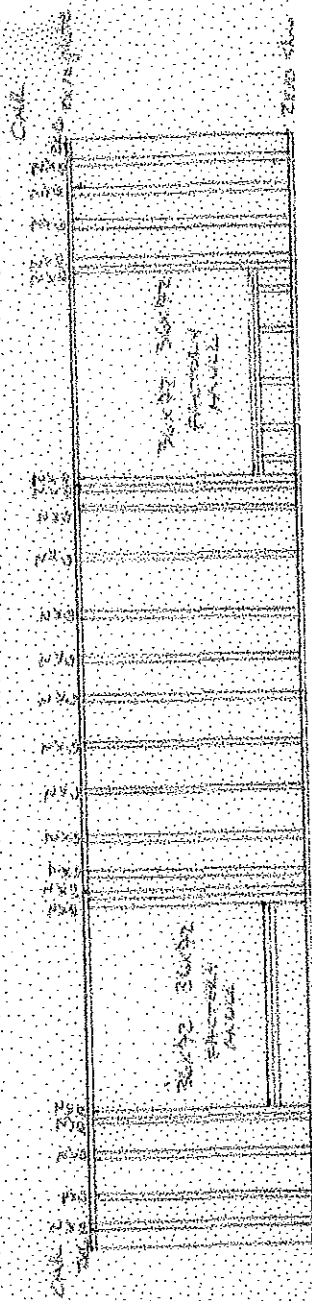

REYNOLDS TAKE OUT
 REYNOLDS TAKE OUT

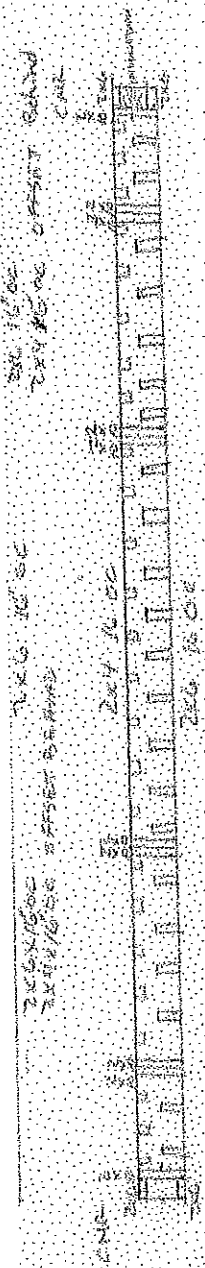

394 CUMBERLAND AVE

FRONT

577 CUMBERLAND AVE

Scope: Remove glass, frame for 4 double hung windows on front, 1 double hung & each end, change out door.

Wall Framing: 2x6 plates with 2x6 studs on exterior half 16" o.c. 2x4 studs on interior half 16" o.c. EXT SHEATHING 2 layers of 1/2" plywood. Insulation FOXUL COMB R-23 EXT HALF R-15 INTERIOR Drywall (Gypsum board) Interior Finish

36x72 36x72

36x72 36x72

36x72

36x72

FRONT

Quotation


Alside Supply - Portland, ME

88 Walsh Drive
Portland,
United States
207-775-6157

Quote ID SQRK001239-1

P.O. Number

Line	Label	Qty	UOM	Family/Part Number	Unit	Extended
1		1.0000	EA	Entry Door Entry Door System	649.43	649.43



3-0 X 6-8, Left Hand Outswing, Smooth-Star Embossed/Molded Open, No glass, S960, Single Door, Double Bore, 2-3/8" Backset, 2-1/8" BoreDia, 2-1/8" Deadbolt Dia, 5 1/2" Center to Center, Final Frame Rot Proof Bitm Jamb, 4-9/16", No Casing, Public Access with Thermal Break, Sill Finish Mill, 3 Self-Aligning Hinges, Satin Brass (Zinc Dichromate) - US2D, Brz Comp Weatherstrip,

All prices are in USD

Adjusted Subtotal (Discounted)		649.43
Tax	0.00%	0.00
Labor Tax	0.00%	0.00
Shipping and Handling	0.00	0.00
Other Charges (Specify)	0.00	0.00
Total Quote Value		649.43

Application version 8.1.0.56

Printed on 8/1/2017

Content Version 2.1.2.0

Page 2 of 2

377 COMBER ROAD AVE SPENCER

Sales Person:



Customer Acknowledgement

Quote Date
8/1/2017

Date Ordered
Quote Not Ordered

Dealer Name:

659600 LEAPING FISH LLC

Bill To:

Ship To:

Order Notes:

Delivery Notes:

Phone: (207) 773-4773 Fax:

Quote Name:

Project Name:


377

377

QUOTE #	RUSH	STATUS	PO#
1526163	No	None	

Line Item #	Qty	Width x Height	UJ	Description	Net Price	Extended
1	1	71.5" X 71.5"	144		\$448.70	\$448.70

Overall Rough Opening: 72" X 72"



0301-New Construction Double Hung / Double Hung 71.5 x 71.5

Sash Split = Even

Operation / Venting = Double Hung

New Construction With J-Channel

Frame Color = White

CLIMATECH, No Upgrade, IE Liners

U-Factor = 0.3, CR = 57, SHGC = 0.31, VT = 0.56, CPD =

ASO-A-23-02795-00001

No Jamb Extension, NC Wrapping, Rough Opening

Vertical Factory 0.5" thick, 71.5" length

Line Item Notes:

Pricing Detail:

\$168.06 1A - Base Price

\$30.69 1A - Glass Type

\$1.87 1A - NC Wrapping

\$9.54 1A - IE Liners

\$168.06 1B - Base Price

\$30.69 1B - Glass Type

\$1.87 1B - NC Wrapping

\$9.54 1B - IE Liners

\$28.38 FACTORY MULLED

Comment / Room:

None Assigned

ATTENTION

Please note that all weights provided are estimates and subject to change based on actual order shipment.

NOTICE: The rating information provided on this quote is based upon the NFRC ratings at the time of quote.

Such ratings are subject to changes in the standard by the applicable regulatory agencies and will be finalized at the time of manufacturing. All ratings printed on the NFRC label will supersede the NFRC rating set forth in the quote. Any changes made to an order after submission may also result in changes to the NFRC rating.

Customer shall be solely responsible for determining whether the product ordered meets their jurisdiction's requirements.

I have reviewed this order and certify that it is correct. I understand that this order is noncancellable, nonreturnable, and nonrefundable.

Total Unit Count 2

TOTAL WEIGHT	35.3
SUB-TOTAL:	\$448.70
SALES TAX 1	\$24.68
SALES TAX 2:	\$0.00
LABOR:	\$0.00
FREIGHT:	\$0.00
TOTAL:	\$473.38

By Authorized Representative

377 CUMBERLAND AVE SPINELLA