Location of Construction:	Owner:		Phone:		Permit No: 95113	
Owner Address:	Leasee/Buyer's Name:	Phone:	Business	sName:	PERMIT ISSUED	
Contractor Name:	Address:		1 1 m		Permit Issued: 0CT 3 1995	
Past Use:	Proposed Use:	COST OF WOR		PERMIT FEE:		
4-fam	Se the	FIRE DEPT.		INSPECTION: Use Group: Type:	CITY OF PORTLAND	
7-5011			r v e v	Signature:	Zone: CBL: (64-003-00)	
Proposed Project Description:				S DISTRICT (P.U.D.)	Zoning Approval:	
Franky managary 386-88605-688	Nakous	Action:	* *		Special Zone or Reviews Shoreland Wetland	
		Signature:		Date:	☐ Flood Zone ☐ Subdivision	
Permit Taken By:	Date Applied For:	3 Gotober 1705			☐ Site Plan maj ☐ minor ☐ mm ☐	
 Building permits do not include plumbing, septic or electrical work. Building permits are void if work is not started within six (6) months of the date of issuance. False information may invalidate a building permit and stop all work 					☐ Conditional Use ☐ Interpretation ☐ Approved ☐ Denied Historic Preservation	
~			TINE	DERMIT ISSUED REQUIREMENTS	☐ Not in District or Landmark ☐ Does Not Require Review ☐ Requires Review	
				EMENT	Action:	
I hereby certify that J am the owner of record	CERTIFICATION d of the named property, or that the proposection as his authorized agent and I agree	sed work is authorized by t to conform to all applicab	he owner of the laws of the tive shall have	record and that I have beer is jurisdiction. In addition	Approved with Conditions Denied	
authorized by the owner to make this applic if a permit for work described in the applicareas covered by such permit at any reasona			h permit		Date: /	
authorized by the owner to make this application if a permit for work described in the application areas covered by such permit at any reasonate	able hour to enforce the provisions of the				Date: 4	
authorized by the owner to make this applic if a permit for work described in the application	able hour to enforce the provisions of the	code(s) applicable to such		PHONE:	Date: 4	

	_
11-8-95 Dinio Startia	
11-21-95 Denie completed, spoke to Jeanne Rouske (Grah Build)	_
Milings between units patch plaster above days	_
Stillings, need to sell electrical & slanding plinits	_
Building is equipped willarm system, don't know of	_
Meyll help on line or not flavisla then that a	_
the pystem is already there, they should take ful	_
advantacy of it.	_
1.24. The met wineil meltyer regulating bother room enclosure removal.	_
There are 2 sprinklers above boiler, hell provide Amoke. The	_
2rd floor is completely spectrocked, now working on first	_
and there flow. The plumping on 3 to floor yet.	_
4.24.96 Certificate Final Inspection-Contractor not ready-	_
needs to apply for an unenanext, as they are currently	_
working on the 4th unit in the Branew. He will	_
will arrendred and submit a floor plan. To be an esticion	ئرے_
apt-Hneters). Plunking not completed get. Return on Frankley Gos	To go
/ / / / / / / / / / / / / / / / / / /	-
4/28/16 Water Jens 13 - Foundation:	
Type Foundation: Strep. hardial to Plumbing: Final: Other: Other:	
Plumbing:	
7/30/96 - Bont. ligh Inspection - Other:	
of to others.	

CITY OF PORTLAND, MAINE Department of Building Inspection



Certificate of Occupancy

147 Valley at

LOCATION

— changed as to use under Building Permit No. Substantially to requirements of Zoning Ordinance and occupancy or use, limited or otherwise, as indicated bel	Building Code of the City, and is hereby approve
PORTION OF BUILDING OR PREMISES	APPROVED OCCUPANCY
List is	How the for
Limiting Conditions:	
ិភាព ខុស ខុសជាតិ ១៩ ១ ប្រជាពល់ ១១ ខ្លែកប	
This certificate supersedes certificate issued	
Approved:	and the second second
reproved.	

BUILDING PERMIT REPORT								
	DATE	:27/0cT/95 ADDRESS: 247 Valley ST.						
	REASON FOR PERMIT: reLocate 3rd Short bathroom							
	BUILDING OWNER: York Cumber Land Housing							
	CONTRACTOR: Youth Build PTLD. APPROVED: X 4 X5 X6,							
	PERMIT APPLICANT: X1 49 53							
CONDITION OF APPROVAL SECTION								
	1.	Before concrete for foundation is placed, approvals from the Development Review Coordinator and Inspection Services must be obtained. (A 24 hour notice is required prior to inspection)						
	2.	Precaution must be taken to protect concrete from freezing.						
	3.	It is strongly recommended that a registered land surveyor check all						
	J•	foundation forms before concrete is placed. This is done to verify that the proper setbacks are maintained.						
4	4.	All vertical openings shall be enclosed with construction having a fire rating of at least one(1) hour, including fire doors with selfclosers.						
X.	. 5.	Each apartment shall have access to two(2) separate, remote and						
		approved means of egress. A single exit is acceptable when it exits directly from the apartment to the building exterior with no						
		communications to other apartment units.						
2	6.	The boiler shall be protected by enclosing with one(1) hour fire-rated						
	•	construction including fire doors and ceiling, or by providing						
		automatic extinguishment. Sprinkler piping serving not more than six						
		sprinklers may be connected to a domestic water supply having a capacity sufficient to provide 0.15 gallons per minute, per square foot						
		of floor throughout the entire area. An INDICATING shut-off valve						
		shall be installed in an accessible location between the sprinkler and						
		the connection to the domestic water supply. Minimum pipe size shall						
		be 3/4 inch copper or 1 inch steel. Maximum coverage area of a						
		residential sprinkler is 144 sq. feet per sprinkler.						
	7.	Every sleeping room below the fourth story in buildings of Use Groups R						
		and I-1 shall have at least one operable window or exterior door						
		approved for emergency egress or rescue. The units must be operable						
		from the inside without the use of special knowledge or						
		separate tools. Where windows are provided as means of egress or						
		rescue, they shall have a sill height not more than 44 inches (1118mm)						
		above the floor. All egress or rescue windows from sleeping rooms shall have a minimum net clear opening height dimension of 24 inches						
		(610mm). The minimum net clear opening width dimension shall be 20						
		inches (508 mm), and a minimum net clear opening of 5.7 sq. feet.						
	8.	A portable fire extinguisher shall be located as per NFPA #10. They						
		shall bear the label of an approved agency and be of an approved type.						
	9.	All single and multiple station smoke detectors shall be of an approved						
		type and shall be installed in accordance with the provisions of the						
		City's building code Chapter 9, section 19, 919.3.2(BOCA National						
		Building Code/1993), and NFPA 101 Chapter 18 & 19. (Smoke detectors						
		shall be installed and maintained at the following locations):						

- 1. In the immediate vicinity of bedrooms
- 2. In all bedrooms
- 3. In each story within a dwelling unit, including basements In addition to the required AC primary power source, required smoke detectors in occupancies in Use Groups R-2, R-3 and I-1 shall receive power from a battery when the AC primary power source is interrupted.
- 10. Private garages located <u>beneath habitable rooms</u> in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area by means of 1/2 inch gypsum board or the equivalent applied to the garage side. (Chapter 4 section 407.0 of the BOCA/1993)
- Guardrail & Handrails-A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use Groups 42", except Use Group R which is 36". In occupancies in Use Group A, B, H-4, I-1, I-2 M and R and public garages and open parking structures, open guards shall have balusters or be of solid material such that a sphere with a diameter of 4" cannot pass through any opening. Guards shall not have an ornamental pattern that would provide a ladder effect.
 - 12. All exit signs, lights, and means of egress lighting shall be done in accordance with Chapter 10, section & subsections 1023. & 1024. of the City's building code. (The BOCA National Building Code/1993)
 - 13. Stair construction in Use Group R-3 & R-4 is a minimum of 9" tread and 8-1/4" maximum rise. All other Use Group minimum 11" tread, 7" maximum rise.
 - 14. Headroom in habitable space is a minimum of 7'6".
 - 15. The minimum headroom in all parts of a stairway shall not be less than 80 inches.
 - 16. All construction and demolition debris must be disposed at the City's authorized reclamation site. The fee rate is attached. Proof of such disposal must be furnished to the office of Inspection Services before final Certificate of Occupancy is issued or demolition permit is granted.
 - 17. Section 25-135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a permit to excavate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year".
 - 18. The builder of a facility to which Section 4594—C of the Maine State Human Rights Act, Title 5 MRSA refers, shall obtain a certification from a design professional that the plans of the facility meet the standards of construction required by this section. Prior to commencing construction of the facility, the builder shall submit the certification to the Division of Inspection Services.

19. This permit does not excuse the applicant from obtaining any license which may be needed from the City Clerk's Office.

Samuel Montses Chief of Inspection Services

/el 3/16/95

C, C, LT, Mc Dougall.

Zunit

4. Any work done to the basement apartment is excluded from this Scope.

5. An environmental survey for lead based paint or asbestos is required prior to work commencing. The survey or any required lead or asbestos abatement to be done by others.

6.Any additional structural repairs that may be uncovered during construction are beyond this Scope.

7.All construction debris to be removed by YouthBuild.

8.All work to be done in a workmanlike manner according to standard practices and Quality Standards for the Professional Remodeler, published by the National Association of Home Builders.

9. Workmen's Compensation, where necessary to be carried by YouthBuild Portland.

Marine Contraction of the Contra

or equal, and meet FHA and MSHA specifications. Install new sheet vinyl or VCT in all bathrooms and kitchens. VCT to be 1/8" Armstrong or equal sheet vinyl, and meet FHA and MSHA specifications.

Flooring color to be determined by YCH and YouthBuild.

Mechanical

* : ...

Existing hot water heating system to be reused or replaced by others

Plumbing

Remove existing kitchen sinks, faucets, and dishwashers, all three apartments.

Install new kitchen sinks, faucets, as per plans, all three apartments, per applicable codes.

New sinks to be Dayton, 3322, stainless steel or equal. New faucets to be Gerber 49.251 or equal.

Remove existing bathroom toilets, lavatories, tub/showers, faucets and associated plumbing connections.

Install new toilets, lavatories, tub/showers, and faucets, as per plans, all three apartments, as per applicable codes. Toilets to be U/R 4090-01 Atlas, lavatories to be U/R 4613-01 Ashton, tub showers to be U/R 6806-01 Mars two piece. Lavatory faucets to be Delta 2520 2, tub shower faucets to be Symmons S96-2 or equal. All fixture colors to be white.

Electrical

Remove all existing wiring, devices and fixtures. Install all new wiring, devices and fixtures as per applicable codes.

Existing service entrance and subpanels to remain. Install smoke detectors as per code.

Existing egress lighting to remain.

Existing fire alarm system to remain.

Existing ceiling lighting to remain

Install exterior lights at front entry and rear door Install one telephone line per apartment.

Install one cable TV line per apartment.

NOTE:

- 1. Existing heating system and radiators to be reused or replaced by others.
- 2.All appliances to be provided to others.
- 3. Due to previous remodel and permit status as a group home, it is assumed that all existing egress areas meet code requirements. Any alterations to those areas to meet additional Code requirements is beyond this Scope.

Install new, 1 3/8" solid core, flush,birch veneer
 doors

Hardware

Install new latchsets and hinges on all new interior doors. Latchsets to be Schlage, Kwickset, or equal. Install door stops where required.

Install door closers at egress doors as required by applicable Codes.

Windows

Remove all existing windows.

Install new, Certainteed or equal, 1/2" insulated glass, double hung, vinyl replacement windows with screens, configuration similar to existing,

Cabinets

Install new cabinets, vanities and countertops per
 plan.

Cabinets and vanities to be Diamond, Homecrest, or equal with melamine faces and doors.

Countertops to be postformed laminate.

Cabinet, vanity and countertop to be determined by YCH and YouthBuild.

Insulation

Remove any existing insulation from existing wall and roof cap framing spaces.

Install 3 1/2" fiberglass batt insulation (R=11) at all exterior walls. Hand pack insulation into cracks and joints as necessary to insure continuous insulation barrier.

Install 12" batt insulation (R=38) at floor
 joists along entire perimeter of building, 12"
 wide.

Install 12" blown-in cellulose insulation (R=38) at roof cap.

Install 6 mil. polyethylene vapor barrier at all exterior walls, on warm side of insulation.

Drywall

Install 1/2" gypsum drywall at all new and existing interior partitions, as per plan.

Install 1/2" gypsum drywall at interior face of all
 exterior walls as per plans.

Install moisture resistant drywall at all wet walls in kitchens and bathrooms.

Tape, finish, and sand.

Install new, one hour rated drywall ceiling on floor joists above existing furnace, as per applicable codes.

Ceilings

Repair and level existing acoustical ceiling grids as required.

Replace damaged ceiling tiles to march existing.

Flooring

Remove all existing carpet and linoleum flooring. Install new carpet in all living rooms, bedrooms, closets and hallways. Carpet to be 26 oz. olefin



SCOPE OF WORK

247 Valley Street Portland, Maine 04102

Masonry

Repoint existing foundation as necessary.up to 100 lineal feet.

Remove existing concrete, front steps.

Carpentry

Remove existing interior partitions per plans. Remove existing window and door casings, plaster and plaster lath, base mouldings, window frames and sashes, interior doors, kitchen and bath cabinets, etc.

Make structural repairs as necessary.

Install new 3 5/8" wood frame partitions per plans, with 2x4 studs, 16" on center.

Install new window frames. Install new window and door casings (drywall returns where appropriate, 1x4 flat casing elsewhere), new doors and window sashes, and new base mouldings.

Repair existing interior stairs, handrails and flooring as necessary, to stabilize for new finishes. Install particle board subfloors where necessary for carpet installation and plywood subfloors for tile, sheet vinyl.

Install new, pressure treated .40CCA wood, front steps.

Install new, vinyl siding at ground level apartment. Siding type and design to be determined by YCH and YouthBuild

Install new, pressure treated .40CCA wood railing at ground floor deck.

Painting

Apply prime coat and two finish coats of paint to all interior wall surfaces, new trim, mouldings stairs, and handrails. Paint to be latex, flat on all wall and ceiling surfaces. Kitchen and bathroom walls to be latex, semigloss. All trim and interior woodwork to be latex, semigloss. Colors to be determined by YCH and YouthBuild.

Finish all interior doors with one prime coat and two finish coats of latex, semigloss paint.

Colors to be determined by YCH and YouthBuild


Roofing

Repair roofing and flashing below deck at front entry (above ground floor apartment)

Doors

Remove existing, unrated interior doors. Rated doors to remain.


(207) 772-4656 (207) 879-0773 FAX

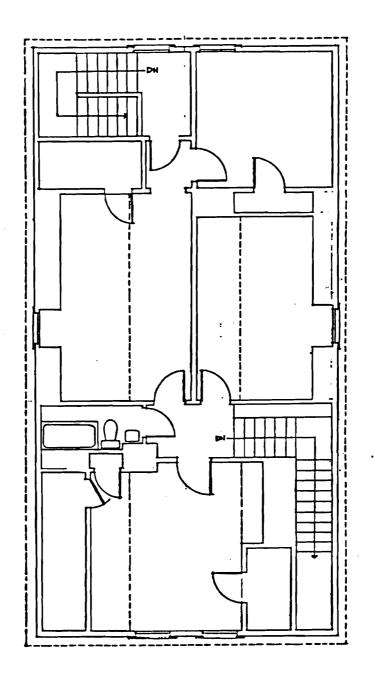

1/8" = 7=0"

EXISTING THIRD FLOOR PLAN


(207) 772-4656 (207) 879-0773 FAX

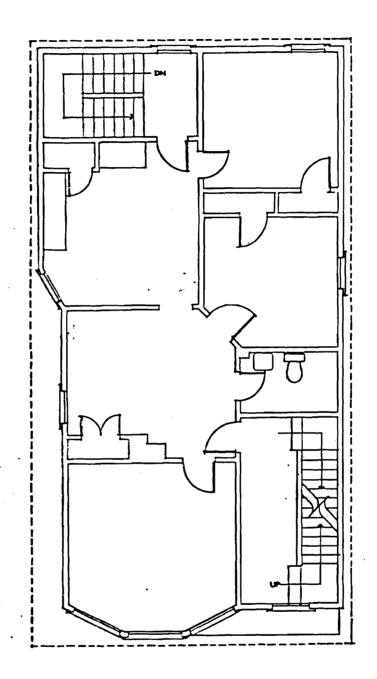

1/0" = 1=0"

EXISTING SECOND FLOOR PLAN


(207) 772-4656 (207) 879-0773 FAX

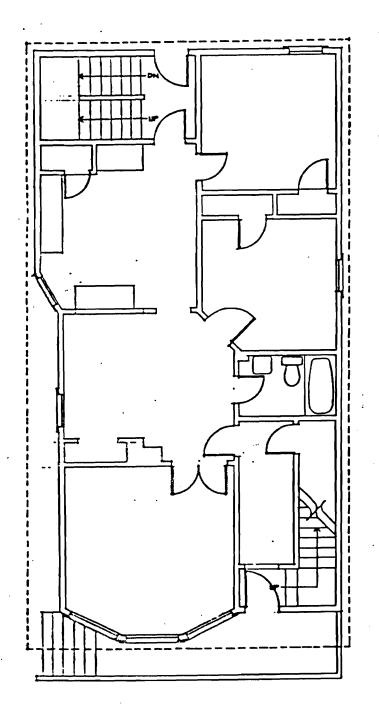

7/3, = 1-5.

EXISTING FIRST FLOOR PLAN


(207) 772-4656 (207) 879-0773 FAX

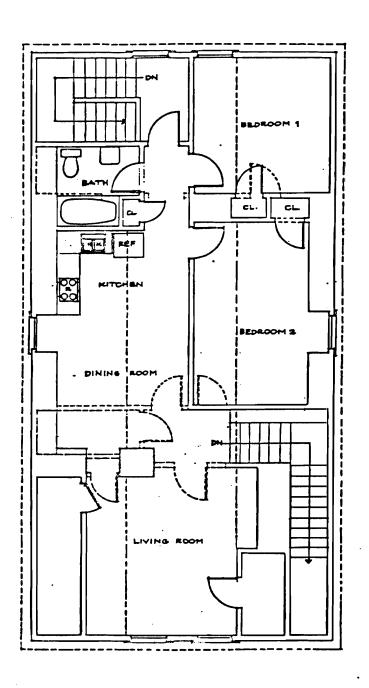

1/0" = 1-0"

PROPOSED THIRD FLOOR PLAN


(207) 772-4656 (207) 879-0773 FAX

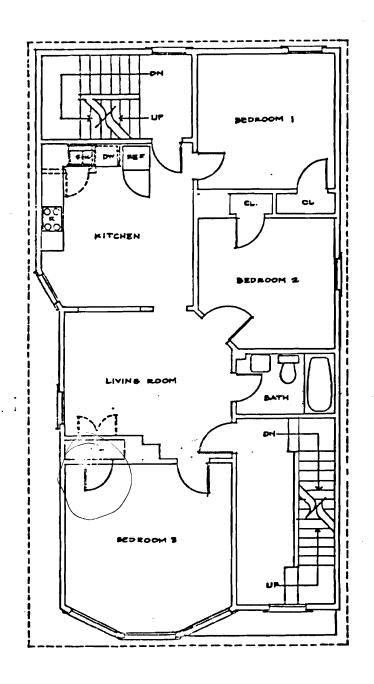

でご= デーン

PROPOSED SECOND FLOOR PLAN


(207) 772-4656 (207) 879-0773 FAX

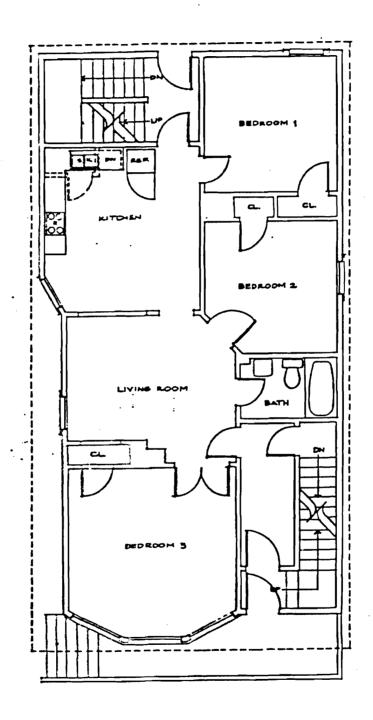


℃5° = **?-**0*

PROPOSED FIRST FLOOR PLAN

247 VAUS

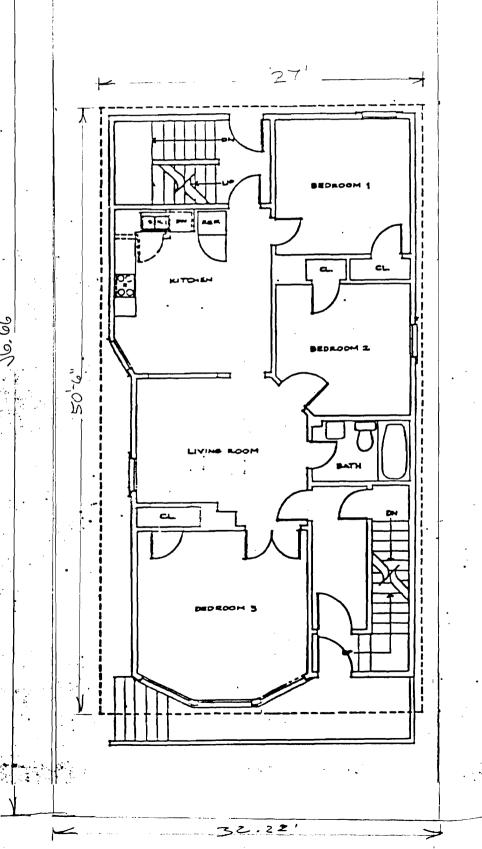

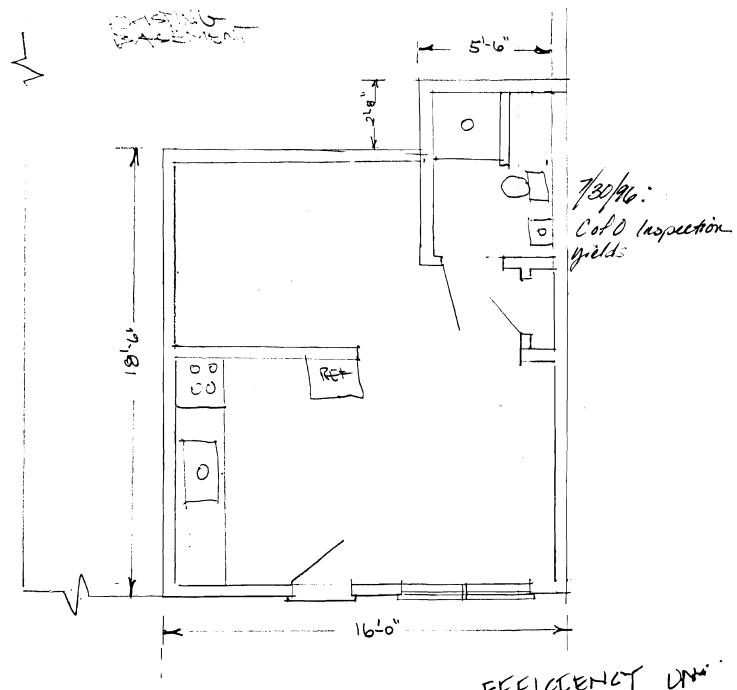

247 VALLEY ST EFFICIENCY UN. BASENENT APARTOLENT

14" = 1 PERMIT#: 951132

OWARS: YORK CUMBERLAND HOUSING

CONTRACTOR: PORTLAND WEST NEIGHBORHOUS PLANNING FORTLAND.

MEAN METRECK CONTACT: 879-8710

Inspection Services P. Samuel Hoffses Chief



Planning and Urban Development Joseph E. Gray Jr. Director

CITY OF PORTLAND

August 6, 1996

Neal Meltzer 181 Brackett Street Portland, Maine 04101

RE: 247 Valley Street

Dear Neal,

On August 1, 1996 I conducted a final electrical inspection at 247 Valley Street and found the items which must be corrected immediately.

Apartment 4

- 1 Switch ove stove in basement apartment must be moved.
- 2. An outside light at the entrance of the basement apartment must be installed
- 3. Finish labeling all panels
- 4. More lighting in basement must be installed including on at the panels
- 5. Switch plate for switch in basement near panels must be installed.

You have 10 days from receipt of this letter to complete these items to receive a certificate of occupancy.

Please do not hesitate to contact me if you have any further questions regarding this matter.

Sincerely,

Mull H. lelen Michael A. Collins

Chief Electrical Inspector

City of Portland

cc: P. Samuel Hoffses, C, Insp Svcs Div

A. Powers, CEO

A. Eager, Electrical Contractor