




1 BITUMINOUS PAVEMENT - DRIVEWAY AND PARKING LOT
C301 NOT TO SCALE

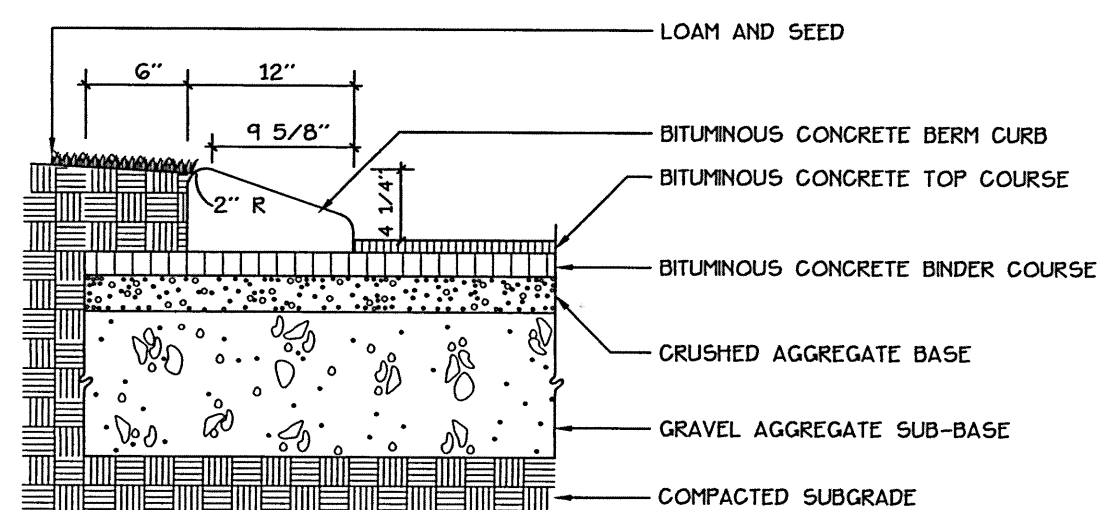


6 CAPE COD BITUMINOUS CURB
C301 NOT TO SCALE

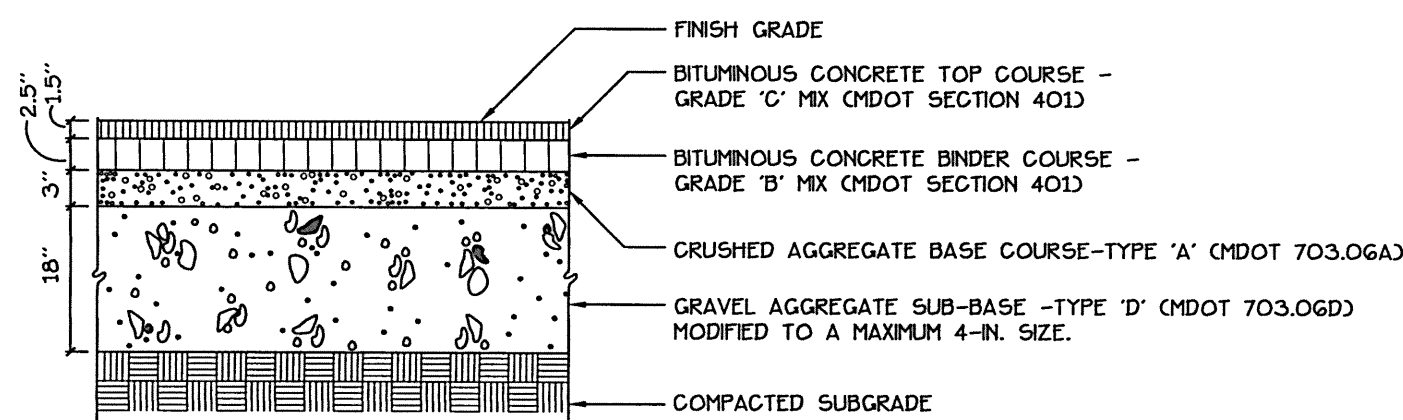


2 BITUMINOUS PAVEMENT - PUBLIC RIGHT-OF-WAY
C301 NOT TO SCALE

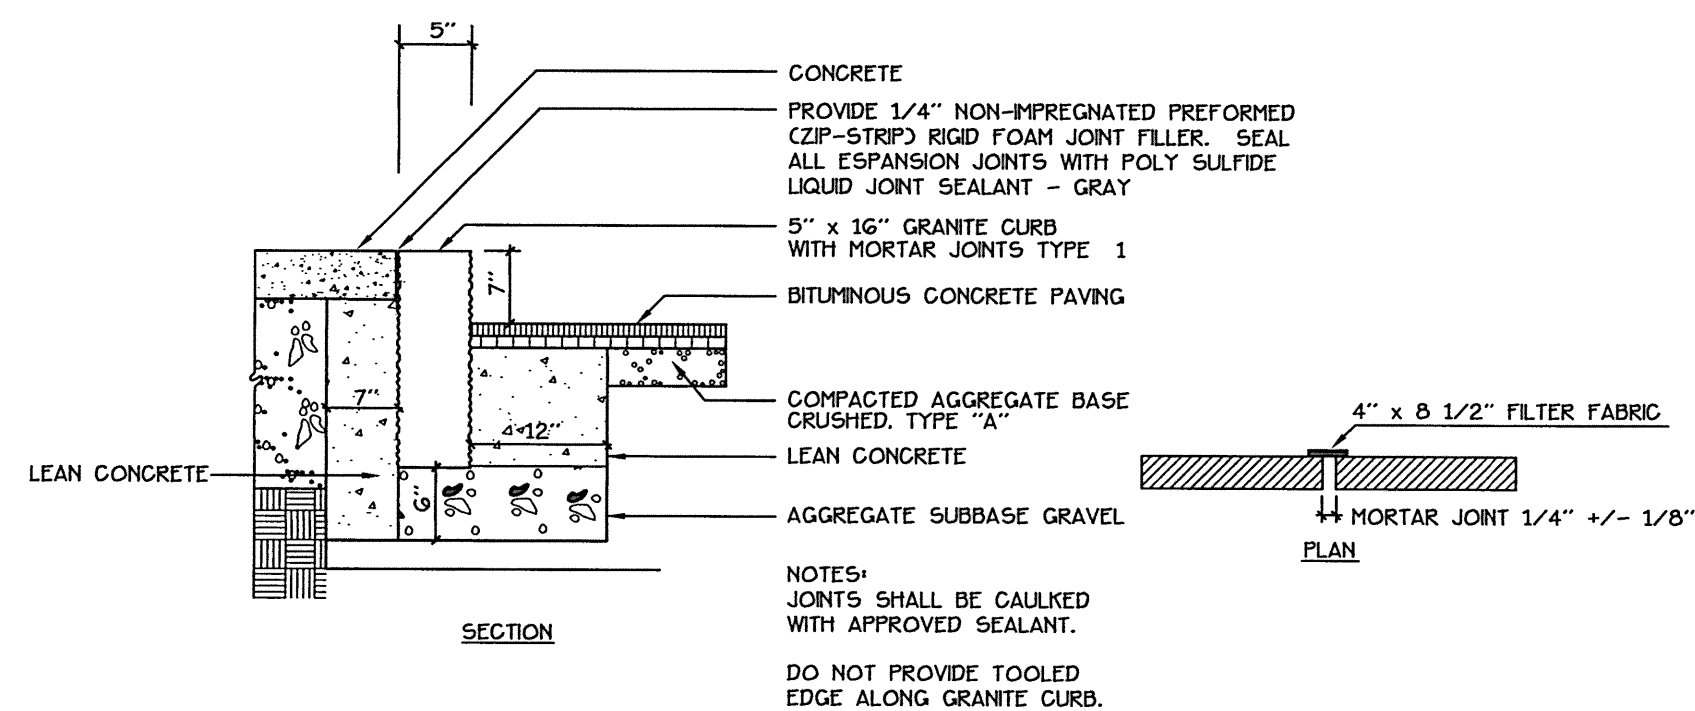


7 VERTICAL GRANITE CURB
C301 NOT TO SCALE

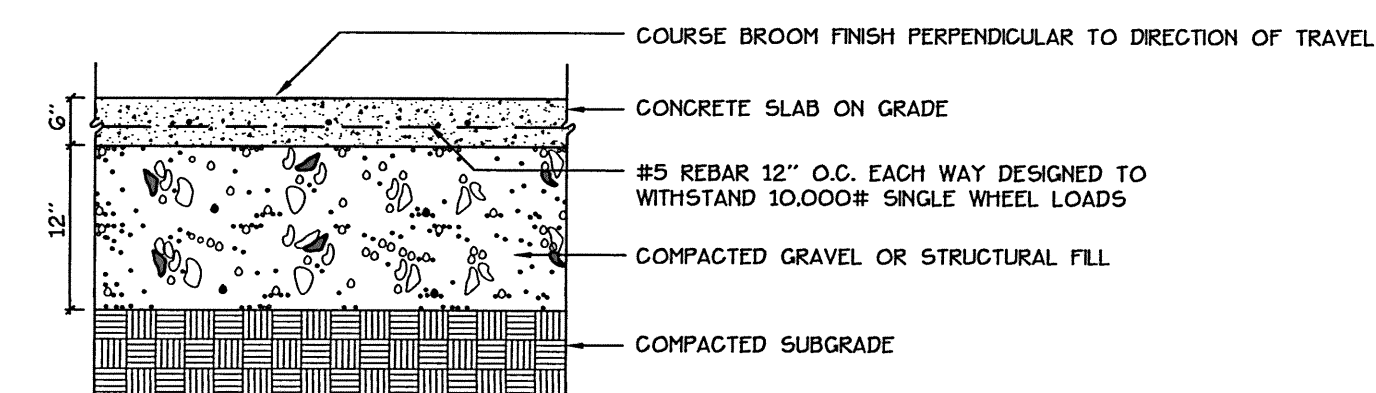


3 CONCRETE DUMPSTER PAD
C301 NOT TO SCALE

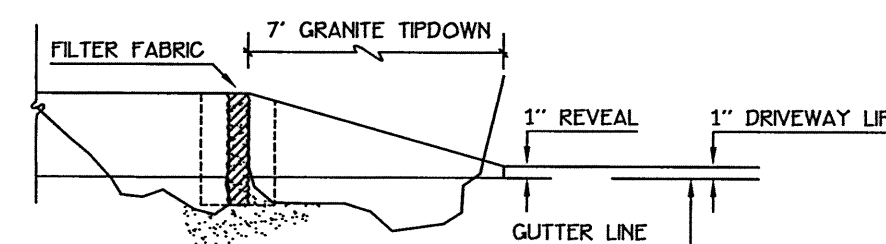


8 GRANITE TIPDOWN CURB
C301 NOT TO SCALE

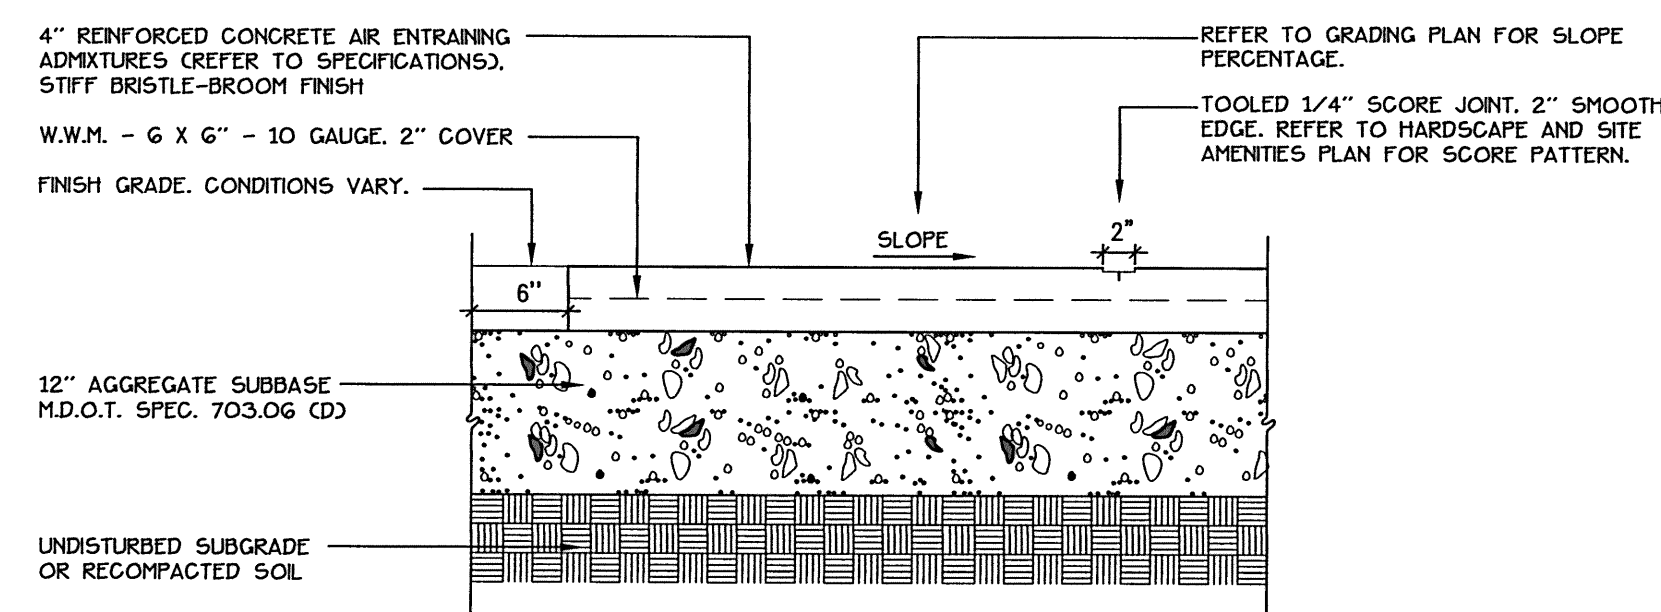


4 CONCRETE WALK
C301 NOT TO SCALE

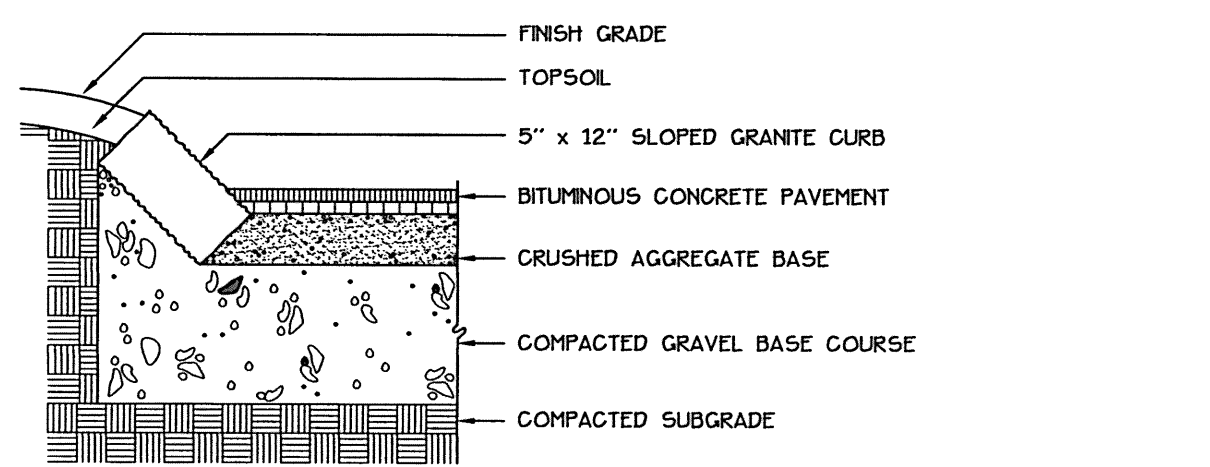


9 SLOPED GRANITE CURB - ALTERNATE
C301 NOT TO SCALE

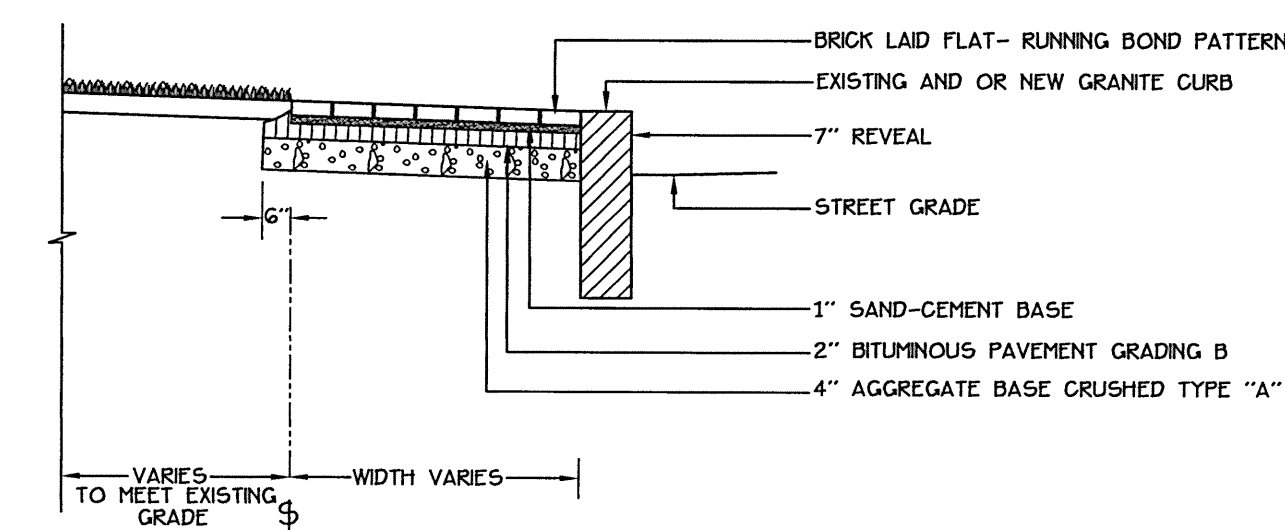

5 BRICK SIDEWALK WITH GRANITE CURB
C301 NOT TO SCALE

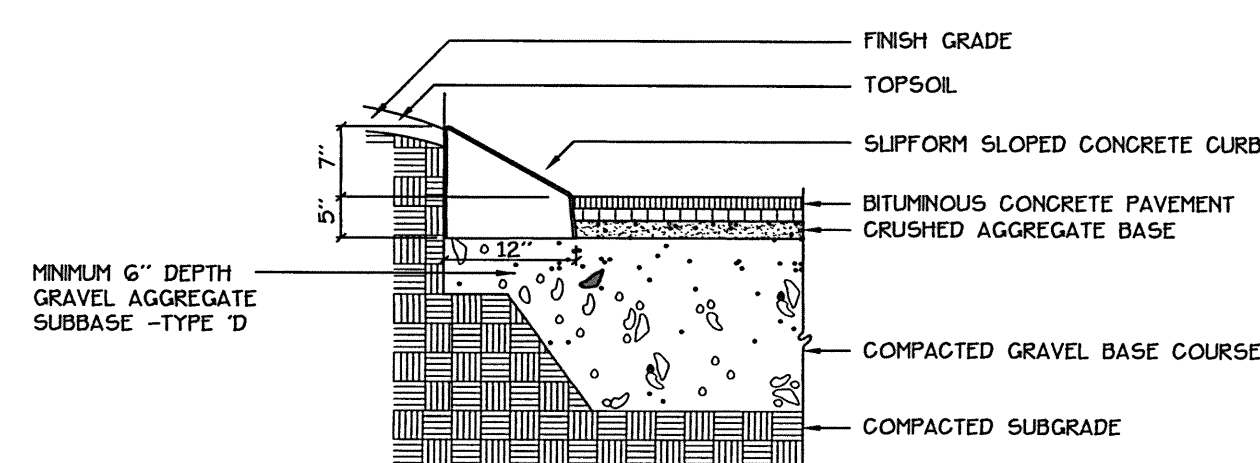


10 SLIPFORM CONCRETE CURB - ALTERNATE
C301 NOT TO SCALE

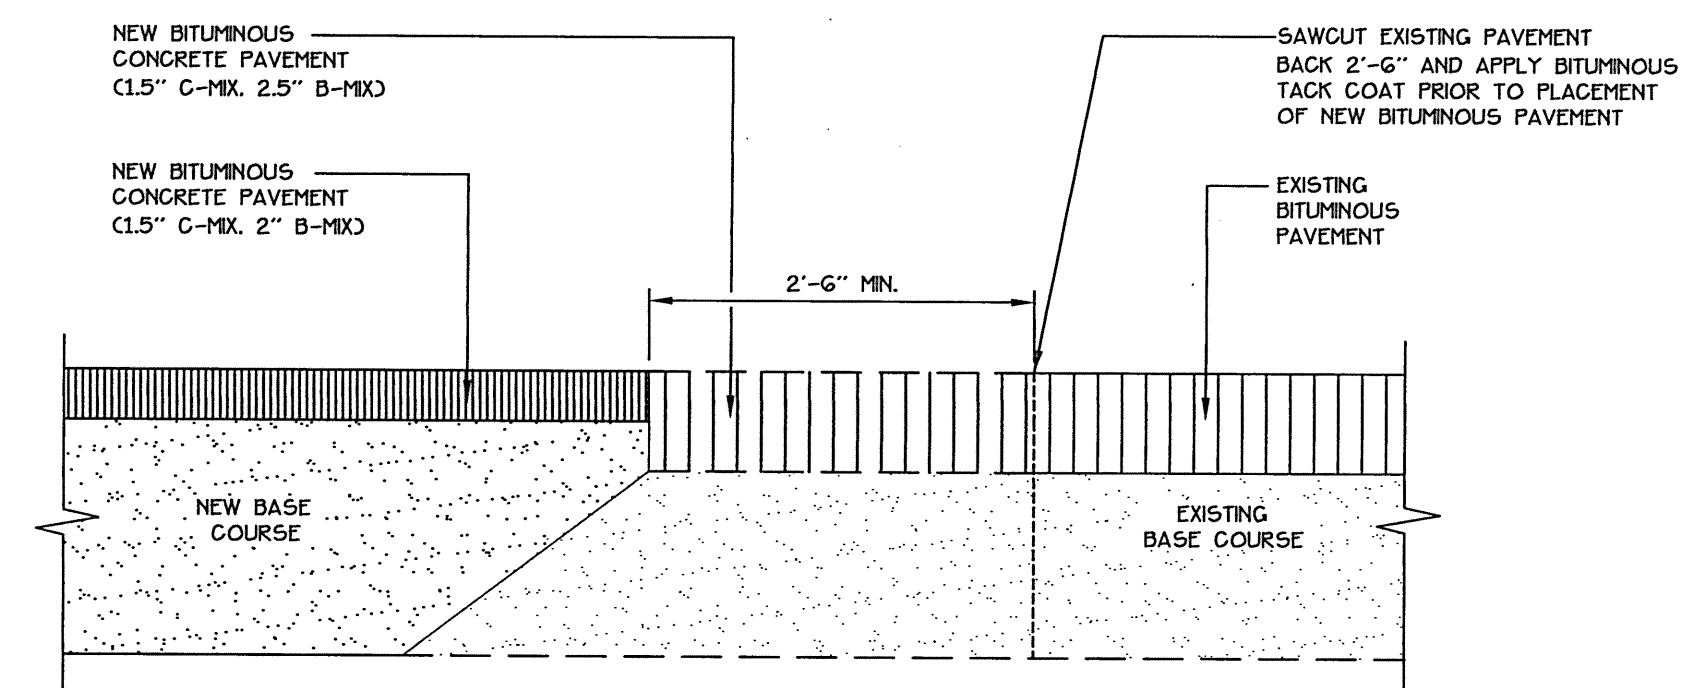


11 PAVEMENT SAWCUT DETAIL
C301 NOT TO SCALE

- NOTES:
- CURB RAMP LENGTHS ARE BASED ON SIX (6) INCH CURB REVEAL HEIGHT AND NO RUNNING SLOPE. RAMP LENGTHS SHALL BE ADJUSTED AS NECESSARY TO ACCOMMODATE VARYING CURB REVEAL HEIGHTS AND TO MATCH RUNNING SLOPES OF ADJACENT ROADWAY AND SIDEWALK SLOPES TO MAINTAIN A RAMP THAT DOES NOT EXCEED THE MAXIMUM RAMP SLOPE OF 1:2.
 - DETECTABLE WARNINGS SHALL CONSIST OF RAISED TRUNCATED DOMES AND SHALL HAVE A BASE DIAMETER OF 0.9 INCHES (23 mm) MINIMUM AND 1.4 INCHES (36 mm) MAXIMUM, A TOP DIAMETER OF 90 PERCENT OF THE BASE DIAMETER MINIMUM TO 60 PERCENT OF THE BASE DIAMETER MAXIMUM AND A HEIGHT OF 0.2 INCHES (5.1 mm). A CENTER-TO-CENTER SPACING OF 1.6 INCHES (41mm) MINIMUM AND 2.4 INCHES (61mm) MAXIMUM, AND A BASE-TO-BASE SPACING OF 0.65 INCHES (17mm) MINIMUM, MEASURED BETWEEN THE MOST ADJACENT DOMES ON A SQUARE GRID.
 - DETECTABLE WARNINGS SHALL CONTRAST VISUALLY WITH ADJOINING SURFACES, EITHER LIGHT-ON-DARK OR DARK-ON-LIGHT. THE MATERIAL USED TO PROVIDE CONTRAST SHALL BE AN INTEGRAL PART OF THE WALKING SURFACE. DETECTABLE WARNINGS USED ON INTERIOR SURFACES SHALL DIFFER FROM ADJOINING WALKING SURFACES IN RESILIENCY OR SOUND-ON-GAME CONTACT.
 - ALL ACCESSIBLE ROUTE SIDEWALKS INTERSECTING ROADWAYS, DRIVEWAYS, OR OTHER VEHICULAR CROSSINGS REQUIRE DETECTABLE WARNINGS. DETECTABLE WARNING ZONES SHALL BE INSTALLED SIX (6) INCHES (OR THE HORIZONTAL THICKNESS OF THE ADJACENT CURB) FROM THE FLOW LINE OF THE CURB EXTEND INTO THE SIDEWALK FOR A 24" DEPTH AND COVER THE COMPLETE WIDTH OF THE SIDEWALK OR RAMP AREA. DETECTABLE WARNING ZONES SHALL CONFORM TO THE SLOPE REQUIREMENTS OF THE RAMP, LANDING, OR ACCESSIBLE ROUTE AS DEFINED IN THE SPECIFIED DETAIL. DETECTABLE WARNINGS SHALL NOT BE INSTALLED IN FLARED SIDES, IF THE RAMP INCLUDES FLARED SIDES.
 - ALL LANDING AREAS SHALL BE 4 FEET WIDE BY 4 FEET LONG (MINIMUM DIMENSIONS). THE SLOPE OF THE LANDING AREA SHALL NOT EXCEED A 1:48 IN ANY DIRECTION.
 - ALL ACCESSIBLE ROUTE SLOPES ADJOINING THE LANDING AREA, EXCLUDING THE CURB RAMP, SHALL NOT EXCEED A SLOPE OF 1:20 UNLESS OTHERWISE NOTED.

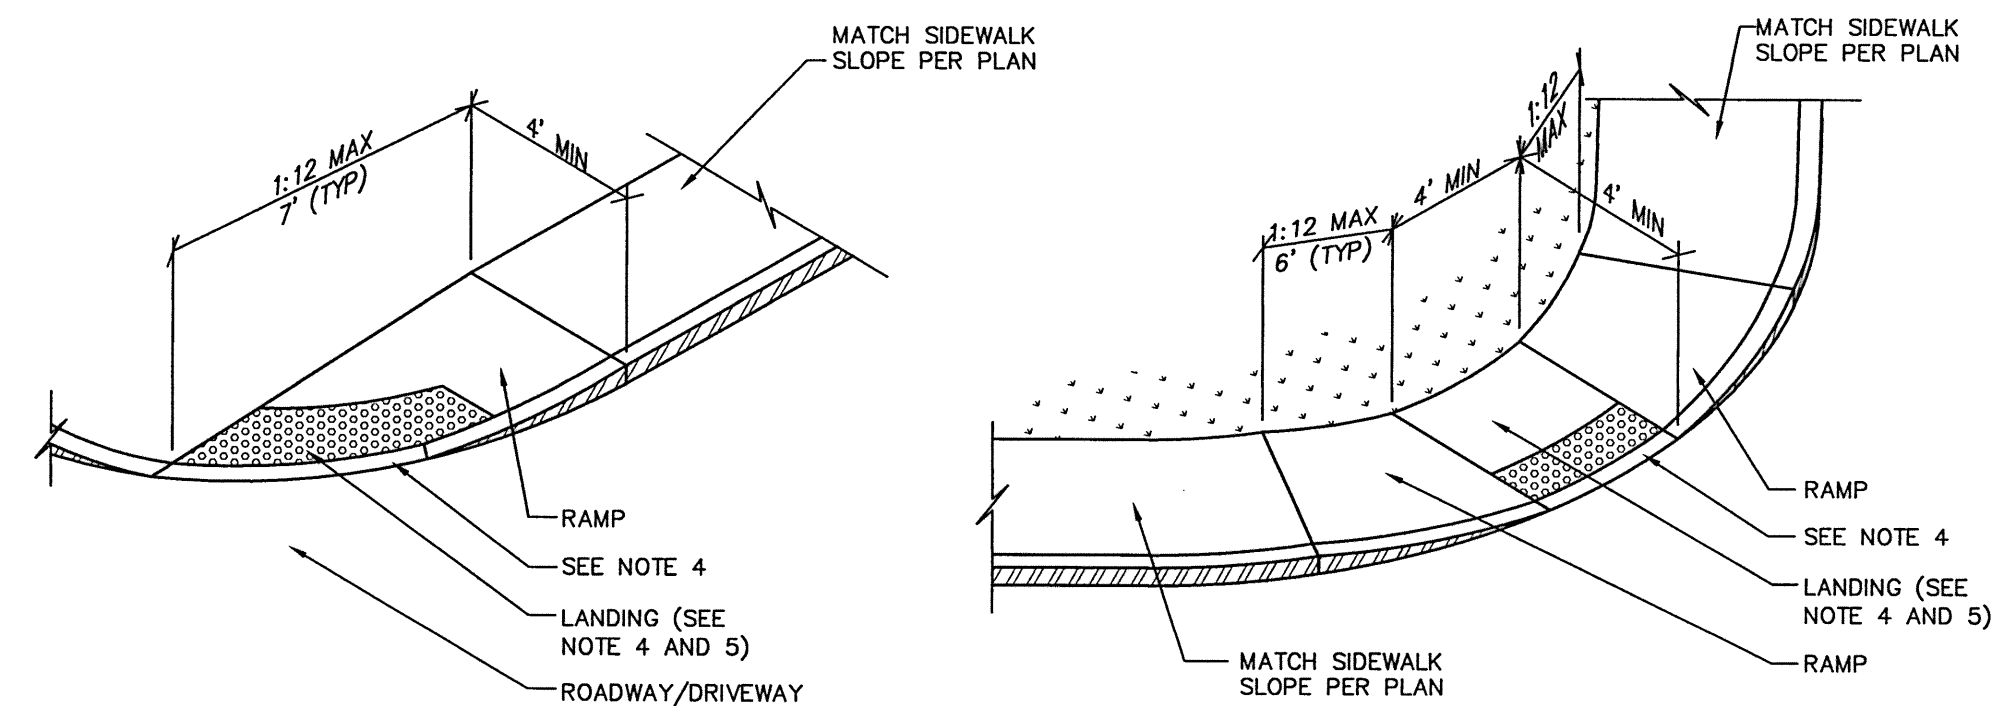


12 BARRIER FREE RAMP
C301 NOT TO SCALE

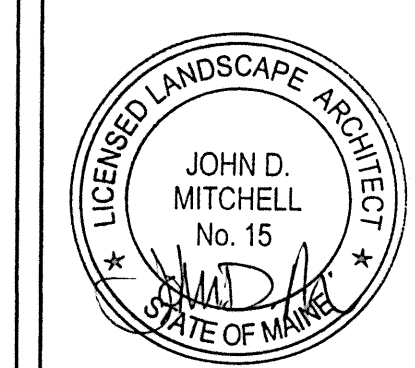

Gawron Turgeon ARCHITECTS
29 Black Point Road
Scarborough, Maine 04074
www.gawronturjeon.com
207-883-6307 tel / 207-883-0361 fax



FLORENCE HOUSE
190 VALLEY STREET
PORTLAND, MAINE

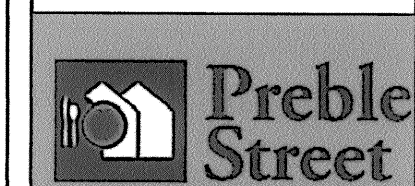

| REVISIONS | | |
|-----------|---------|-------------------------------|
| # | DATE | DESCRIPTION |
| 1 | 12.07 | MAINE HOUSING 50% REVIEW SET |
| 2 | 52.08 | 90% MAINE HOUSING REVIEW SET |
| 3 | 7.31.08 | 100% MAINE HOUSING REVIEW SET |
| 4 | 9.2.08 | 100% BID DOCUMENTS |

| | |
|---------------|-------------|
| DATE: | 05/02/08 |
| PROJECT # | 100405 |
| DRAWN BY: | BAM |
| CHECKED BY: | JDM |
| DRAWING SCALE | 1" = 20'-0" |

SHEET TITLE

SITE DETAILS

C 301
© COPYRIGHT 1985-2008
REPRODUCTION OR USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION OF GAWRON TURGEON ARCHITECTS IS PROHIBITED

Mitchell & Associates LANDSCAPE ARCHITECTS
The Staples School
70 Center Street
Portland, Maine 04101
Tel: (207) 774-4427
Fax: (207) 874-2460
www.mitchellassociates.biz

GP Gorrill-Palmer Consulting Engineers, Inc.
Traffic and Civil Engineering Services
P.O. Box 1237
15 Shaker Road
Gray, ME 04039
TEL: 207-657-6910
FAX: 207-657-6912
E-Mail: mailbox@gorrillpalmer.com