TURNER BARKER INSURANCE
MARGINAL WAY OFFICE

63 MARGINAL WAY — PORTLAND, MAINE

Turner Barker INSURANCE
A Gorham Savings Bank Company

DRAWING INDEX

			02.14.07 PRICING SET	02.20.07 STATE CODE REVIEW SET
GENERAL	G101	TITLE SHEET & DRAWING INDEX	●	●
	G102	CODE REVIEW SHEET – NFPA 2003, IBC 2003		●
	G103	STANDARD ADA SHEET	●	●
SITE/CIVIL				
LANDSCAPING				
STRUCTURAL				
ARCHITECTURAL	A101	FLOOR PLAN, REFLECTED CEILING PLAN AND NOTES	●	●
	A102	DOOR SCHEDULE, PARTITION TYPES, MOULDING PROFILES	●	●
	A941	FINISH SCHEDULE AND LEGEND AND INTERIOR ELEVATIONS	●	●
MECH/ PLUMBING				
ELECTRICAL				

ABBREVIATIONS

ALUM OR AL	ALUMINUM	GALV	GALVANIZED	S	SOUTH
AWP	ACOUSTICAL WALL PANEL	GB	GRAB BARS	SC	SHOWER CURTAIN
ACT	ACOUSTICAL CEILING TILE	GC	GENERAL CONTRACTOR	SD	SOAP DISPENSER
BIT	BITUMINOUS	GWB	GYPSUM WALL BOARD	SCHED	SCHEDULE
BM	BENCH MARK	HC	HANDICAP	SECT	SECTION
BOT	BOTTOM	HD WD	HARDWOOD	SHT	SHEET
BRG	BEARING	HDR	HEADER	SIM	SIMILAR
BRK	BRICK	HDWE	HARDWARE	SND	SANITARY NAPKIN DISPOSAL
C	CARPET	HM	HOLLOW METAL	SQ	SQUARE
CAB	CABINET	HORZ	HORIZONTAL	SSS	SYNTHETIC SPORTS SURFACE
CB	CHALK BOARD	HT	HEIGHT	STD	STANDARD
CC	CENTER TO CENTER	ID	INSIDE DIAMETER	STL	STEEL
CH	CONCRETE HARDENER	IF	INSIDE FACE	STRUCT	STRUCTURAL
CJ	CONTROL JOINT	IN	INCHES	SV	SHEET VINYL
CL	CENTER LINE	INSUL	INSULATION	T	TEMPERED (GLASS)
CLG	CEILING	INT	INTERIOR	TB	TACK BOARD
CMU	CONCRETE MASONRY UNITS	LOC	LOCATION	THK	THICKNESS
CONC	CONCRETE	M	MARBLE	TO	TOP OF
CONT	CONTINUOUS	MAS	MASONRY	TOB	TOP OF BEAM
CONST	CONSTRUCTION	MAX	MAXIMUM	TOM	TOP OF MASONRY
CONTR	CONTRACTOR	MB	MARKER BOARD	TOW	TOP OF WALL
CT	CERAMIC TILE	MECH	MECHANICAL	TP	TOILET PAPER DISPENSER
DBL	DOUBLE	MFGR	MANUFACTURER	TYP	TYPICAL
DF	DRINKING FOUNTAIN	MIN	MINIMUM	UNO	UNLESS NOTED OTHERWISE
DIA	DIAMETER	MISC	MISCELLANEOUS	VB	VAPOR BARRIER
DIM	DIMENSION	MO	MASONRY OPENING	VCT	VINYL COMPOSITION TILE
DNA	DOES NOT APPLY	MR	MOP RECEPTOR	VERT	VERTICAL
DTL	DETAIL	MRGB	MOISTURE RESISTANT GYPSUM BOARD	VWC	VINYL WALL COVERING
DWG	DRAWING			W	WEST
E	EAST	MTL	METAL	W/	WITH
EA	EACH	N	NORTH	WC	WATER CLOSET
EF	EACH FACE	NA	NOT APPLICABLE	WD	WOOD
EJ	EXPANSION JOINT	NIC	NOT IN CONTACT		
EL	ELEVATION	NO	NUMBER		
ELEC	ELECTRICAL	NOM	NOMINAL		
ELEV	ELEVATOR	NTS	NOT TO SCALE		
EMHO	ELECTROMAGNETIC HOLD OPEN	OA	OVERALL		
EQ	EQUAL	OC	ON CENTER		
EW	EACH WAY	OD	OUTSIDE DIAMETER		
EWC	ELECTRIC WATER COOLER	OPNG	OPENING		
EXIT OR (E)	EXISTING	OPP	OPPOSITE		
EXP	EXPANSION	OF	OUTSIDE FACE		
EXT	EXTERIOR	P	PAINT		
FD	FLOOR DRAIN	PTD	PAINTED		
FDN	FOUNDATION	PL	PLATE		
FE	FIRE EXTINGUISHER	PLY WD	PLYWOOD		
FFE	FINISH FLOOR ELEVATION	PNL	PANEL		
FIN	FINISH	P.A.	PRESSURE TREATED		
FIN FL OR FF	FINISH FLOOR	PT & D	PAPER TOWEL AND WASTE DISPENSER		
FIN GR	FINISH GRADE	PTN	PARTITION		
FL	FLOOR	RD	ROOF DRAIN		
FR	FIRE RATING	RE	REFER		
FRMG	FRAMING	REF	REFRIGERATOR		
FT	FEET (FOOT)	REINF	REINFORCED		
FV	FIELD VERIFY	REQD	REQUIRED		
FWC	FABRIC WALL COVERING	RM	ROOM		
G	GRANITE	RO	ROUGH OPENING		
GA	GAUGE				

LEGEND

- BUILDING SETION MARKER
- ACT1 8'-0" — CEILING TAG
- 1 — COLUMN CENTER LINE
- DETAIL MARKER
- 101 — DOOR TAG
- EXTERIOR ELEVATION
- A1 A920 — INTERIOR ELEVATION
- 200 — HPD — PLANT TAG
- 1 — REVISION CLOUD WITH TAG
- ROOM A101 — ROOM TAG
- SECTION MARKER
- W1 — WALL TYPE
- A — WINDOW TAG

GENERAL NOTES

1. THE GENERAL CONTRACTOR SHALL VERIFY ALL EXISTING CONDITIONS AND DIMENSIONS, AND REPORT ANY DISCREPANCIES TO THE ARCHITECT. CONTRACTOR SHALL PROCEED WITH THE WORK ONLY AFTER DISCREPANCY HAS BEEN RESOLVED WITH THE ARCHITECT.

2. DO NOT ALTER OR PENETRATE ANY EXISTING STRUCTURAL ELEMENTS, EXTERIOR WALL COMPONENTS, OR FIRE RATED WALLS

3. THE LOCATIONS OF DOORS NOT DIMENSIONED SHALL BE 6 INCHES FROM ADJACENT WALL.

4. THE BUILDING SHALL BE CONSTRUCTED TO CONFORM WITH ALL APPLICABLE CODES INCLUDING, BUT NOT LIMITED TO, THE LATEST EDITIONS OF IBC 2003, BOCA, NFPA 101, & ANSI.

5. ALL WOOD IN CONTACT WITH CONCRETE SHALL BE PRESSURE PRESERVATIVE TREATED & ALL CONNECTIONS TO BE STAINLESS STEEL.

6. CONTRACTOR SHALL WORK FROM GIVEN DIMENSIONS AND LARGE SCALE DETAILS ONLY. DO NOT SCALE THE DRAWINGS.

7. EXISTING BUILDING COMPONENTS WHICH ARE AFFECTED BY NEW WORK AND DEMOLITION, OR WHICH MAY BE DAMAGED BY THE CONTRACTOR OR ANY SUBCONTRACTORS SHALL BE REPLACED OR RESTORED TO ORIGINAL CONDITION AND COLOR BY METHODS DESCRIBED IN THIS CONTRACT OR AS APPROVED BY THE ARCHITECT. THE GENERAL CONTRACTOR SHALL SEAL, PATCH AND FILL ANY FLOOR AND/OR WALL PENETRATIONS DUE TO DEMOLITION/CONSTRUCTION.

8. INSTALL BLOCKING BEHIND ALL SURFACE APPLIED FIXTURES, TRIM, CABINETS, COUNTER TOPS, AND GRAB BARS WHEN MOUNTED ON STUD WALLS.

9. CONTRACTOR SHALL VERIFY SIZE AND LOCATION OF EXISTING MECHANICAL AND PLUMBING ELEMENTS. CONTRACTOR SHALL RENOVATE EXISTING ALARM SYSTEM TO MAINTAIN CONFORMANCE TO NFPA 13 & 101. CONTRACTOR SHALL VERIFY SIZE & LOCATION OF ALL ELECTRICAL SERVICES AND EQUIPMENT.

10. INSTALL MOISTURE RESISTANT GYPSUM BOARD IN SHOWER ROOM AND ALL OTHER HIGH HUMIDITY AREAS.

11. FINISHES: FINISHES OTHER THEN THE STANDARD FINISHES ARE ALL INDICATED ON THE DRAWINGS, CEILING FINISHES ARE SHOWN ON THE REFLECTED CEILING PLANS AND ALL OTHER FINISHES ARE SHOWN ON THE INTERIOR FINISH LEGEND AND SCHEDULE AND/OR INTERIOR ELEVATIONS. FINISHES INDICATED FOR A PARTICULAR ROOM OR SPACE ARE APPLICABLE FOR THE ENTIRE ROOM OR SPACE, UNLESS OTHERWISE NOTED.

12. ALL EXPOSED SURFACES ARE TO BE PAINTED, WHETHER OR NOT INDICATED ON THE DRAWINGS, EXCEPT AS FOLLOWS: WHERE SPECIAL COATINGS ARE INDICATED; PREFINISHED ITEMS, CONCEALED SURFACES, OPERATING PARTS, AND LABELS. IF PREFINISHED, PAINTING THE FOLLOWING: EXPOSED MECHANICAL DUCTWORK, WALL DIFFUSERS, GRILLES AND LOUVERS, ROOF TOP MECHANICAL EQUIPMENT, AND SPEAKER GRILLES. FINISHED METAL SURFACES, EXCEPT AS LISTED ABOVE. SEE SPECIFICATIONS ON DRAWINGS IDENTIFYING THE TYPES OF PAINTS AND SPECIALTY COATINGS TO BE USED IN ACCORDANCE WITH MATERIAL BEING PAINTED OR COATED.

13. BUILDING INSULATION: PROVIDE AS INDICATED ON WALL DETAILS AND IN ACCORDANCE WITH PARTITION TYPES, WHETHER OR NOT SHOWN IN DETAILS AND DRAWINGS. FOR DRAWING CLARITY, INSULATION MAY NOT BE SHOWN, EVEN IF IT IS PROVIDED.

14. CONTRACTOR SHALL SUBMIT SAMPLES OF ALL INTERIOR FINISHES FOR ARCHITECT'S REVIEW.

15. THE DESIGN AND INSTALLATION OF THE HVAC AND PLUMBING SYSTEMS, ELECTRICAL AND FIRE PROTECTION SYSTEMS, AND STRUCTURAL SYSTEMS SHALL BE PROVIDED THROUGH A DESIGN/BUILD CONTRACT UNDER THE CONSTRUCTION MANAGER.

16. CONSTRUCTION MANAGER SHALL SUPPLY POWER AND COORDINATION TO THE TENANT SUPPLIED SYSTEMS FURNITURE.

17. CONSTRUCTION MANAGER SHALL SUPPLY POWER AND CONDUITS WITH PULL–STRINGS FOR DATA AND TELEPHONE TO ALL TENANT SUPPLIED WORKSTATION(S) LOCATIONS. CONSTRUCTION MANAGER TO PROVIDE CONDUIT WITH PULL–STRINGS TO ALL LOCATIONS RECEIVING DATA AND TELEPHONE.

18. THE DESIGN AND INSTALLATION OF THE DATA AND TELEPHONE SYSTEMS SHALL BE THE RESPONSIBILITY OF THE TENANT.

SITE LOCATION MAP

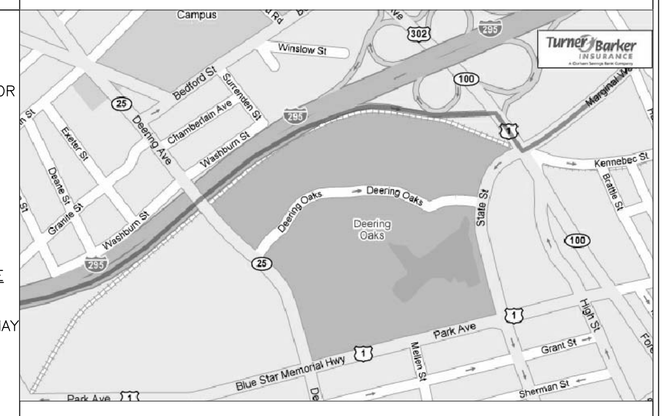

KEY PLAN

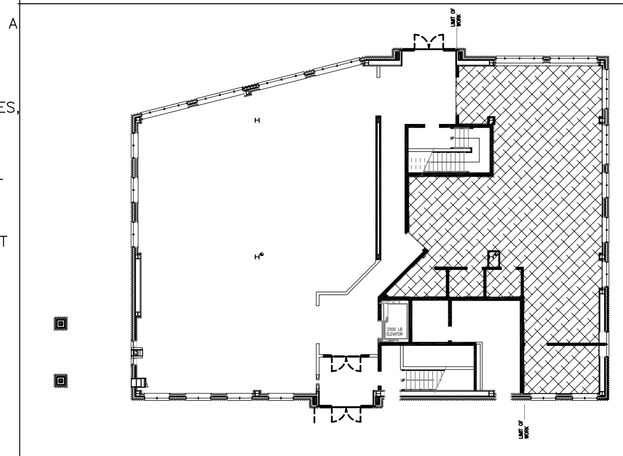

KEY PLAN LEGEND

- EXISTING CONDITION TO REMAIN
- NEW CONSTRUCTION

PROJECT DIRECTORY

OWNER:
TURNER BARKER INSURANCE
ONE INDIA STREET
PORTLAND, MAINE 04101
207.773.8156

ARCHITECT:
GAWRON TURGEON ARCHITECTS
29 BLACK POINT ROAD
SCARBOROUGH, MAINE 04074
207–883–6307

CONSTRUCTION MANAGER:
ALLIED–COOK CONSTRUCTION
P.O. BOX 1396
PORTLAND, MAINE 04104
207.772.2888

STRUCTURAL ENGINEER:
DESIGN BUILD – CONTRACT TO BE AWARDED

LANDSCAPE ARCHITECT:
N/A

SITE/CIVIL ENGINEER:
N/A

MECHANICAL ENGINEER:
DESIGN BUILD – CONTRACT TO BE AWARDED

ELECTRICAL ENGINEER:
DESIGN BUILD – CONTRACT TO BE AWARDED

REGISTERED ARCHITECT — STANLEY W. GAWRON No.1145 — STATE OF MAINE

GAWRON TURGEON ARCHITECTS
29 Black Point Road
Scarborough, ME 04074
www.gawronturgeon.com
Tel. 207 . 883 . 6307
Fax. 207 . 883 . 0361

Turner Barker INSURANCE
A Gorham Savings Bank Company

GROUND FLOOR - MAIN OFFICE
63 MARGINAL WAY PORTLAND, MAINE

REVISIONS

#	DATE	DESCRIPTION
01	02.14.07	PRICING DOCUMENTS
02	02.20.07	STATE CODE REVIEW SET

DATE:	02.14.07
PROJECT #	120106
DRAWN BY:	LAP
CHECKED BY:	MET
DRAWING SCALE	AS NOTED

SHEET TITLE

TITLE SHEET & DRAWING INDEX

G101

© COPYRIGHT 1985-2006
REPRODUCTION OR REUSE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION OF GAWRON TURGEON ARCHITECTS IS PROHIBITED

I:\2006\120106 Turner Barker Insurance\1. Architecture & Interiors\Working\Drawings\120106-G101.dwg, Title Sheet, 2/20/2007 7:45:28 AM, lpynn