



## CHILLER MODEL: GD - 10H-MS

230 Volt 1 Phase	
FLA	
MCA	
MOC	

208/240/ 3 Phase	
FLA	58
MCA	64
MOC	154

460 Volt 3 Phase	
FLA	28
MCA	38
MOC	76


Dimensions	108"L x 48"W x 73"H	
Frame	Powder Coated Steel	
Housing	Powder Coated Aluminum	
Tank	212 Gallon/with aux ports	
Compressor HP	10	
Condenser	Air Cooled	
#1 Glycol Pump HP	3/4	
#2 Glycol Pump HP	5	
Glycol GPM @ 25 PSI	150	
Glycol Connection Size	2" FPT	
HX	Brazen Plate	
Controls	Two Stage Digital	

Electrical Enclosure	NEMA 4
Shipping Weight	1700 Lbs.
DB @ 10'	68
Refrigerant	R404a
BTUH @ 20 degree F	64,218
@ 30 degree F	79,372
@ 40 degree F	96,495

### ***Chiller Package consists of the following:***

Complete refrigeration circuits, Engineered high efficient heat exchanger for maximum energy efficiency, Chiller pump, Process pump, Fluid bypass valve, Insulated oversized glycol reservoir with Aux ports for future chiller modual, All insul: control panel w/single point electrical connection, breakers, starters & safety switches, Digital temperature controller pre wired for fu Brass ball valves for supply and return glycol connection, Powder coated steel frame, Powder coated aluminum housing, Aluminum louvered access panels for easy service and maintenance, Factory-Run tested and fully charged w/ refrigerant

*1 Year Parts and Labor Warranty*

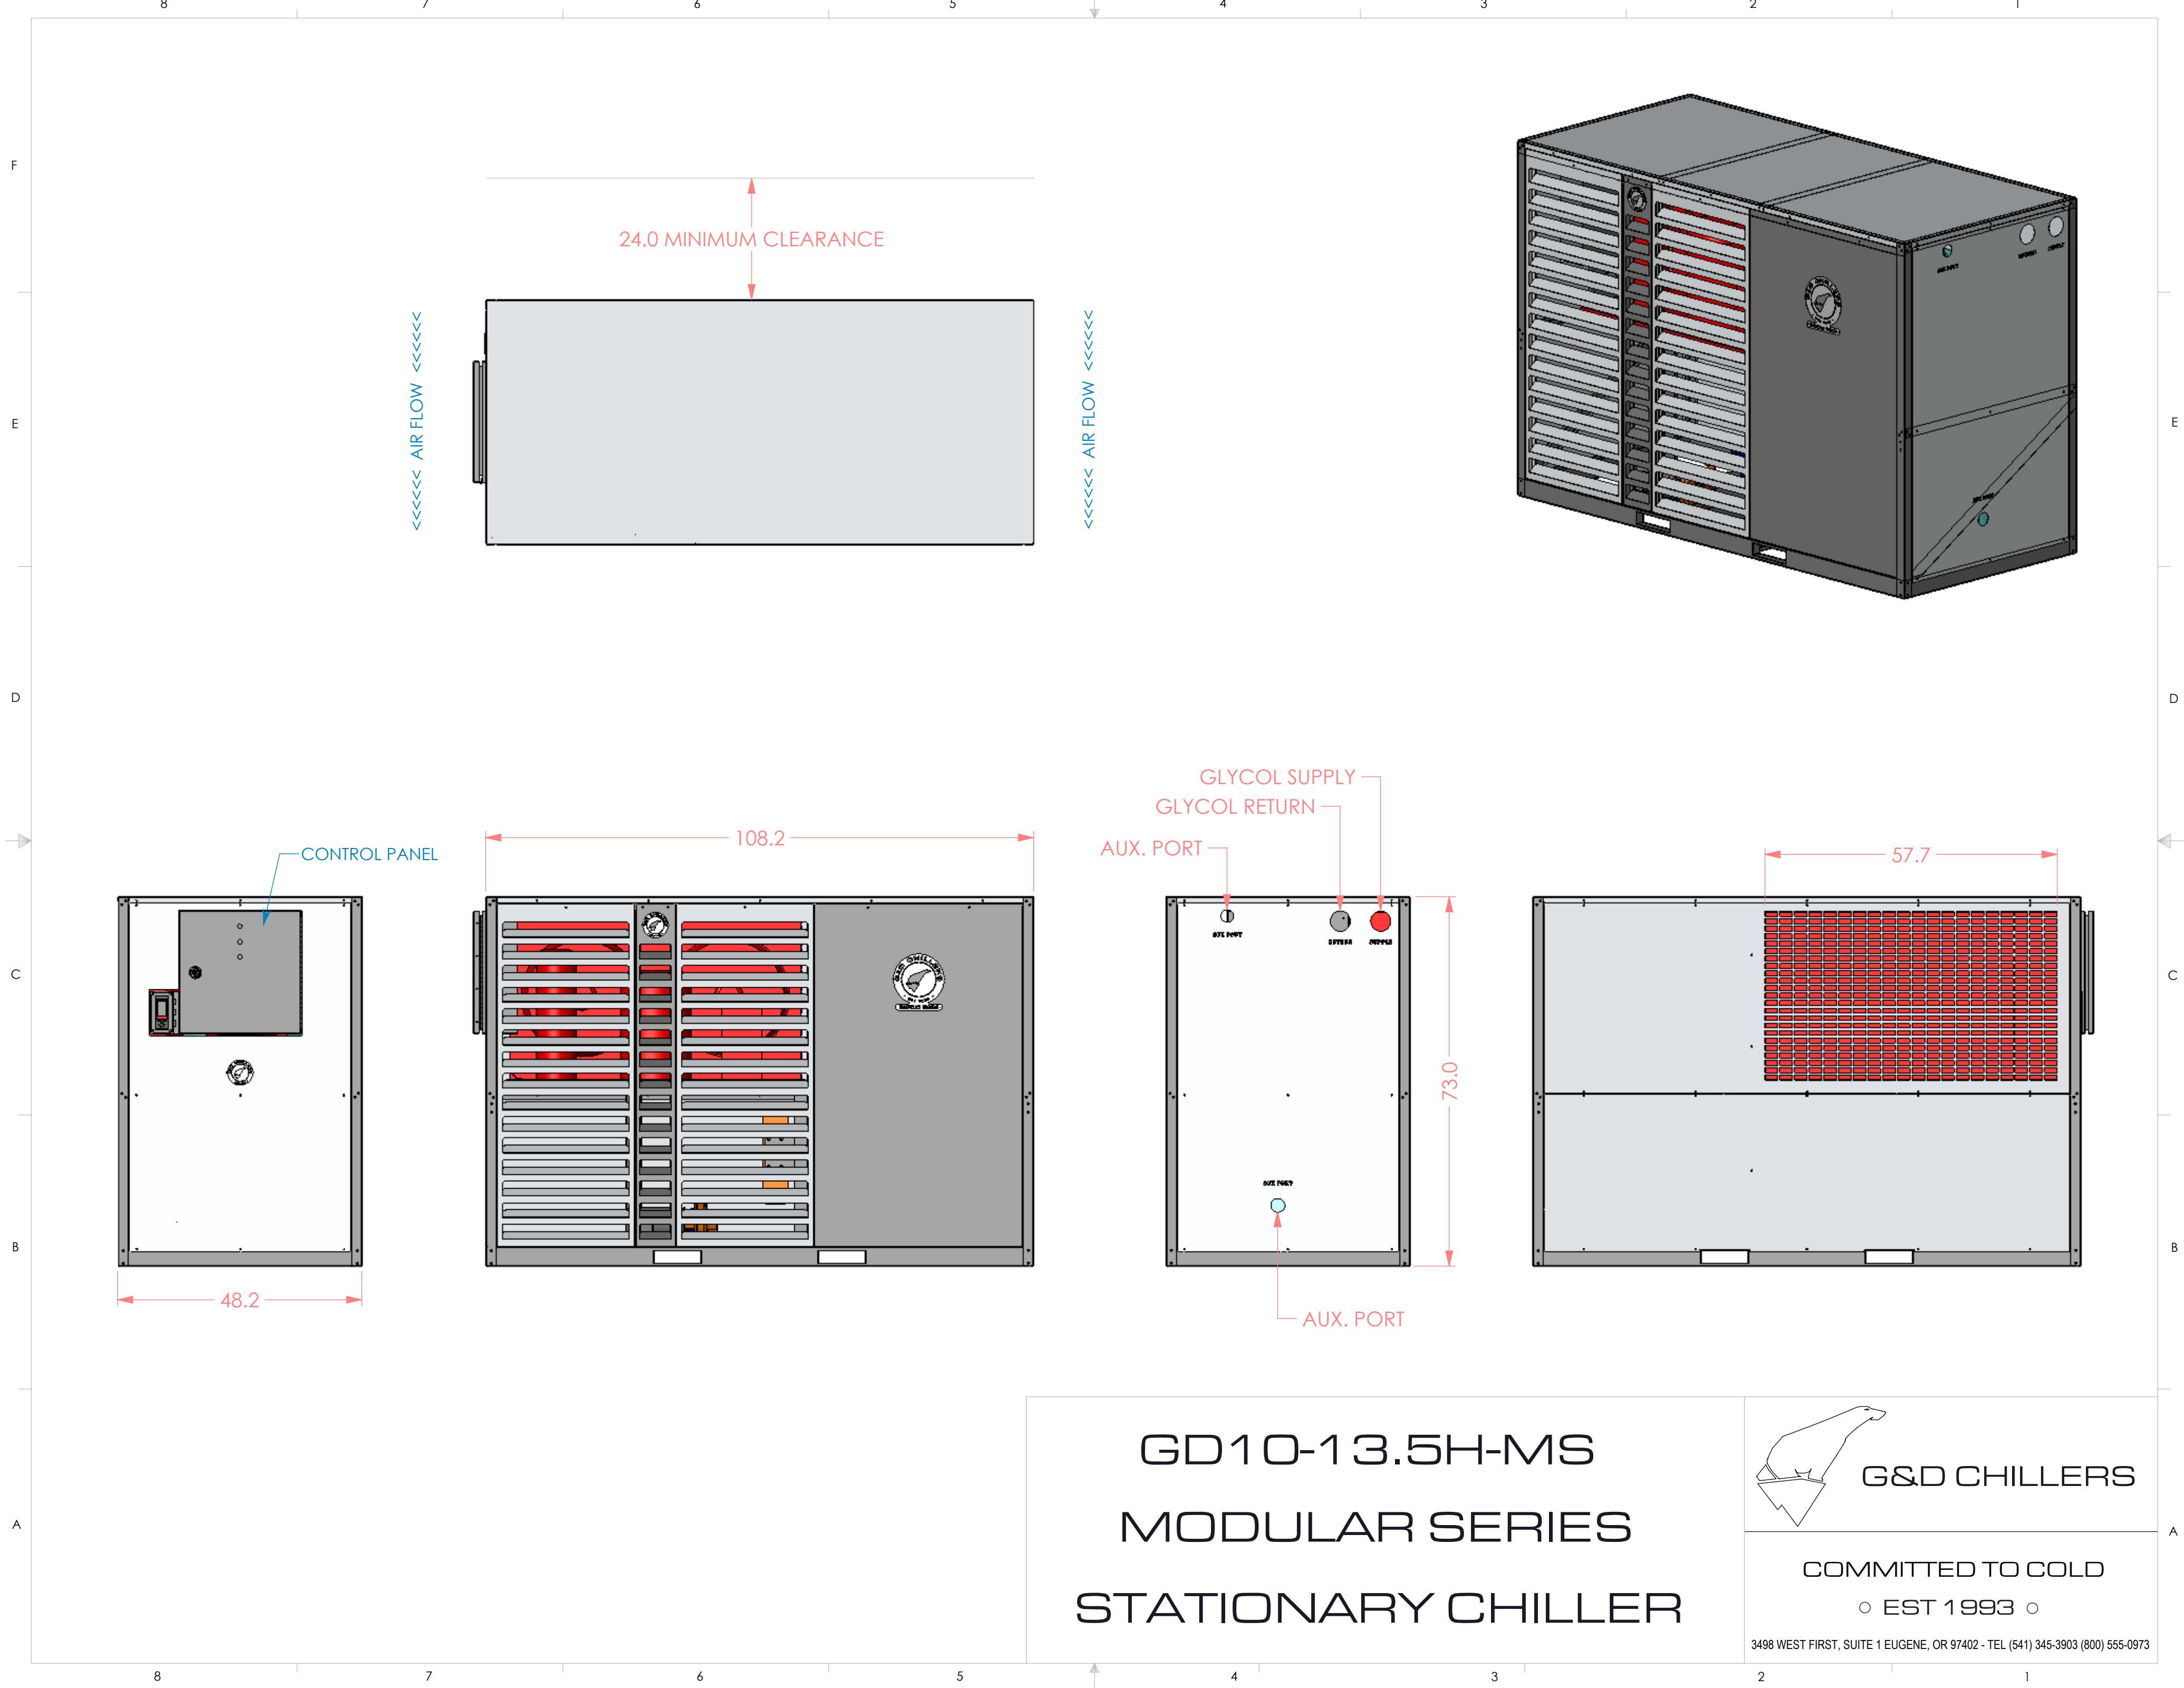

24.0 MINIMUM CLEARANCE

←←←←← AIR FLOW ←←←←←

←←←←← AIR FLOW ←←←←←

CONTROL PANEL

48.2

108.2


GLYCOL SUPPLY  
GLYCOL RETURN  
AUX. PORT

73.0

AUX. PORT

57.7

GD10-13.5H-MS  
MODULAR SERIES  
STATIONARY CHILLER



G&D CHILLERS

COMMITTED TO COLD

○ EST 1993 ○

3498 WEST FIRST, SUITE 1 EUGENE, OR 97402 - TEL (541) 345-3903 (800) 555-0973