


STRUCTURE	RIM	INV IN	DIR	INV OUT	SUMP	SIZE
NEW CB A	11.00	N/A	N/A	7.32	4.32	4'ID
NEW CB 1	11.10	N/A	N/A	7.82	4.82	4' ID
NEW CB 2	11.10	7.40	W	7.30	4.30	4'ID
		7.40	S			
NEW CB 3	10.20	6.38	W	6.20	3.50	4'ID
		6.30	S			
EX CB C	9.90	6.00	W	5.50	EX	EX
		5.60	S			
NEW CB 4	9.20	4.48	SE	4.30	1.3	4'ID
PIPE FROM	PIPE TO	LENGTH	SLOPE	US INV	DS INV	SIZE
NEW CB 1	NEW CB 2	53	0.008	7.82	7.40	6"PVC
RD A	NEW CB 2	40	0.01	7.80	7.40	6"PVC
NEW CB 2	NEW CB 3	115	0.008	7.30	6.38	10"HDPE
NEW CB A	NEW CB 3	128	0.008	7.32	6.30	8"HDPE
NEW CB 3	EX CB C	60	0.01	6.20	5.60	12"HDPE
RD B	EX CB C	30	0.02	6.60	6.00	8"PVC
EX CB C	NEW CB 4	68	0.015	5.50	4.48	12"HDPE

**PLAN REFERENCES**

- EXISTING CONDITIONS FROM THE BOUNDARY SURVEY ON MARGINAL WAY, KENNEBEC STREET & FOREST AVENUE PORTLAND MAINE MADE FOR ATLANTIC NATIONAL TRUST BY OWEN HASKELL, INC. DATED 01.16.2014.
- BEARINGS ARE BASED ON MAINE STATE PLAN COORDINATES NAD 83.
- OWNERS OF RECORD:  
TAX MAP 34-C-9  
ATLANTIC BAYSIDE INVESTMENTS, LLC  
DEED BOOK 31304 PAGE 031

**FLOOD ZONE NOTE**  
BY GRAPHIC PLOTTING ONLY, THIS PROPERTY IS IN ZONE C OF THE FLOOD INSURANCE RATE MAP, COMMUNITY PANEL NO. 230051 13B, WHICH BEARS AN EFFECTIVE DATE OF JULY 17, 1986 AND IS NOT IN A SPECIAL FLOOD HAZARD AREA.

REV	DATE	DESCRIPTION
5	06.01.15	REVISED FOR FINAL TRAFFIC COMMENTS
4	05.18.15	REVISED FOR FINAL CITY COMMENTS
3	04.24.15	ISSUED FOR CONSTRUCTION
2	04.01.15	REVISED PER CITY COMMENTS
1	02.13.15	ISSUED FOR CITY PERMIT

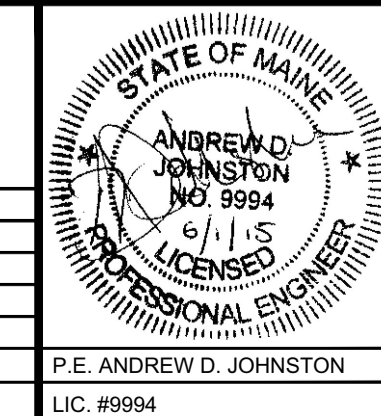

PROJECT: CENTURY TIRE PLAZA  
195 KENNEBEC STREET, PORTLAND, ME  
SHEET TITLE: GRADING AND DRAINAGE PLAN  
CLIENT: NORTHLAND ENTERPRISES, LLC

**FST** **FAY, SPOFFORD & THORNDIKE**  
ENGINEERS • PLANNERS • SCIENTISTS  
778 MAIN ST, SUITE 8, SOUTH PORTLAND, ME 04106

DRAWN: DED  
DESIGNED: ADJ  
CHECKED: ADJ  
FILE NAME: SP-M160 B

DATE OF APPROVAL: 6/8/15  
PLANNER: Nell Donaldson  
PROJECT NO.: 2015-027