### City of Portland, Maine – Building or Use Permit Application 389 Congress Street, 04101, Tel: (207) 874-8703, FAX: 874-8716 Location of Construction: Owner: Phone: Permit No: - -105 Hoyes St. Owner Address: Lessee/Buyer's Name: Phone: BusinessName: Permit Issued: Phone: Contractor Name: Address: 329-2455 Independent Home Improvements COST OF WORK: PERMIT FEE: Past Use: Proposed Use: \$ 0,000,00 Single Family Single Family FIRE DEPT. Approved INSPECTION: Use Group 4-3 Type: 50 ☐ Denied Zone: CBL: 082-8-008 Signature: Signature: X Zoning Approval: Proposed Project Description: PEDESTRIAN ACTIVITIES DISTRICT (P.A.D.) Approved Action: Special Zone or Reviews: Replace & Repair Forch as needed Approved with Conditions: ☐ Shoreland Denied ☐ Wetland ☐ Flood Zone ☐ Subdivision Signature: Date: ☐ Site Plan maj ☐minor ☐mm ☐ November 15, 2000 Permit Taken By: Gayle Date Applied For: Zoning Appeal ☐ Variance This permit application does not preclude the Applicant(s) from meeting applicable State and Federal rules. ☐ Miscellaneous Building permits do not include plumbing, septic or electrical work. ☐ Conditional Use 3. Building permits are void if work is not started within six (6) months of the date of issuance. False informa-☐ Interpretation ☐ Approved tion may invalidate a building permit and stop all work... ☐ Denied Historic Preservation ###Call Bob @ 329-2455 ☐ Not in District or Landmark ☐ Does Not Require Review ☐ Requires Review Action: CERTIFICATION ☐ Appoved I hereby certify that I am the owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been ☐ Approved with Conditions ☐ Denied authorized by the owner to make this application as his authorized agent and I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in the application is issued, I certify that the code official's authorized representative shall have the authority to enter all Date: areas covered by such permit at any reasonable hour to enforce the provisions of the code(s) applicable to such permit November 16, 2000 SIGNATURE OF APPLICANT ADDRESS: DATE: PHONE: RESPONSIBLE PERSON IN CHARGE OF WORK, TITLE PHONE: CEO DISTRICT White-Permit Desk Green-Assessor's Canary-D.P.W. Pink-Public File Ivory Card-Inspector



## CITY OF PORTLAND, MAINE

**Department of Building Inspection** 

	No.	15	20 ()
Received from	2,0	18	a fee
of install erect	Laure .	/100 Dollars	6000
for permit to alter	+ - 4	pacel	pack.
move demolish at		Est. Cost \$	00000
CB + 08 2 B.009		Inspector of buildings	1
	Per	- Cu	16

## THIS IS NOT A PERMIT

No work is to be started until PERMIT CARD is actually posted upon the premises. Acceptance of fee is no guarantee that permit will be granted. PRESERVE THIS RECEIPT. In case permit cannot be granted the amount of the fee will be refunded upon return of the receipt less \$5.00 or 10% whichever is greater.

WHITE - Applicant's Copy YELLOW - Office Copy PINK - Auditors Copy

# THIS IS NOT A PERMIT/CONSTRUCTION CANNOT COMMENCE UNTIL THE PERMIT IS ISSUED


## Building or Use Permit Pre-Application Additions/Alterations/Accessory Structures

To Detached Single Family Dwelling

In the interest of processing your application in the quickest possible manner, please complete the Information below for a Building or Use Permit.

NOTE\*\*If you or the property owner owes real estate or personal property taxes or user charges on any property within the City, payment arrangements must be made before permits of any kind are accepted.

Ettailis Acats of Comments.	1045	*	· · · · · · · · · · · · · · · · · · ·
	T		
Tax Assessor's Chart, Block & Lat Number	Ovine:	۷	Telephone#:
Chant O & D Block B Lat 00%	J in aba	1 some	rte
Owner's Address:	Lessee Buyer's Name (II Applicab	[3]	Cos Of Work: For
Same	<u> </u>		S6,000 S60.
Proposed Project Description: (Please be as specific as possible)	Jack		
Replace and Rey	Pair as N	eeded.	
Contractor's Name, Address & Telephone	, 80b :	· Rec'd	Ву:
tt Independent	some implo	Emento.	Classical installation
Separate permits are required for Int			
•All construction must be conducted in complia •All plumbing must be conducted.			
•All Electrical Installation must comply no			
•HVAC(Heating, Ventilation and Air Condit			
You must Include the following with you ap		mpt, min the are	. //
	r Deed or Purchase an	d Sale Agreeme	nt
,	ur Construction Contr	•	
			•
	lot Plan (Sample Atta	•	1
If there is expansion to the structure, a comp	plete plot plan (Site Plan	) must include:	OEA ALL AND AL
The shape and dimension of the lot, all exis	ing buildings (if any), the pro	posed structure and	me distance from the setting
property lines. Structures include decks por pools, garages and any other accessors structures.		er sections and root	overnangs, as well as, sheet,
Scale and required zoning district setbacks	itules.	//	ALC:
Scale and required zoning district scioness		(4)	I VIV
4) Build	ing Plans (Sample Att	ached)	520
A complete set of construction drawings sho			etruction.
Cross Sections w/Framing details (including			
Floor Plans & Elevations	porches, deeks 117 failings, a	id accessory su delia	13/1/
Window and door schedules			6/0//
Foundation plans with required drainage and	dampproofing		~
Electrical and plumbing layout, Mechanical of	lrawings for any specialized e	quipment such as fu	maces, chimney's, gas
equipment, HVAC equipment (air handling)	or other types of work that m	ay require special re	view must be included.
	Certification		
nereby certify that I am the Owner of record of the nar	ned property, or that the prop	osed work is authori	zed by the owner of record and
at I have been outhorized by the ourse to make late at	nnlication as his/ner allinon78	n agent. I agree to t	OHIOLE TO ELL EPP-COLO.
at a fundadiation In addition at a name tornior desc	nhad in this application is is:	thee I centry that the	e Coco Officiars
presentative shall have the authority to enter all areas	covered by this permit at any	reasonable hour to e	aforce the provisions of the
des applicable to this permit.			
Signature of applicant:	20	Date:	1/00
Building Permit Fee: \$30.00 for the 1st \$	1000.cost plus \$6.00 per \$1,	000.00 cosstruction	obst thereafter.
INSPICORRESPAINUGENT (APADSFD.N7D	2		

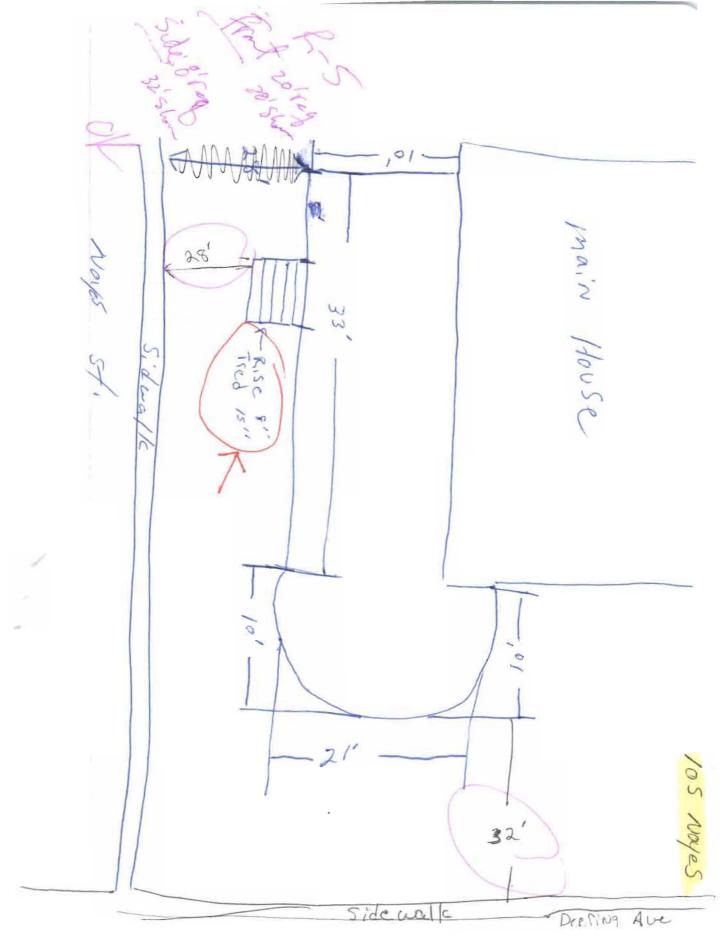

Colums Approx Exalixa?

Replace those
with X Replace Shaded Colums 1 Beam Stairs Shaded aven 105 NOYES 0

BUILDING PERMIT REPORT	
DATE: 16 NOVEM ber 2K. ADDRESS: 165 Noyes ST. CBL: 682-8-9	<u>08</u>
REASON FOR PERMIT: Replace Porch as needed	
BUILDING OWNER: 21ndsay Law rence	
PERMIT APPLICANT: /CONTRACTOR INdependent Hom	7e A
USE GROUP: R-3 CONSTRUCTION TYPE: 5-18 CONSTRUCTION COST: 6, 960.00 PERMIT FEES: P	40,
The City's Adopted Building Code (The BOCA National Building Code/1999 with City Amendments) The City's Adopted Mechanical Code (The BOCA National Mechanical Code/1993)	•
CONDITION(S) OF APPROVAL	
This permit is being issued with the understanding that the following conditions shall be met: \(\frac{\dagger}{2}, \frac{\dagger}{11}, \frac{\dagger}{3}, \dag	
1. This permit does not excuse the applicant from meeting applicable State and Federal rules and laws.	
2. Before concrete for foundation is placed, approvals from the Development Review Coordinator and Inspection Services must be obtained.	(A
24 hour notice is required prior to inspection) "ALL LOT LINES SHALL BE CLEARLY MARKED BEFORE CALLING."	<b>(</b>
3. Foundation drain shall be placed around the perimeter of a foundation that consists of gravel or crushed stone containing not more than 10	
percent material that passes through a No. 4 sieve. The drain shall extend a minimum of 12 inches beyond the outside edge of the footing.	The
thickness shall be such that the bottom of the drain is not higher than the bottom of the base under the floor, and that the top of the drain is 1	
less than 6 inches above the top of the footing. The top of the drain shall be covered with an approved filter membrane material. Where a contract the covered with an approved filter membrane material.	
tile or perforated pipe is used, the invert of the pipe or tile shall not be higher than the floor elevation. The top of joints or top of perforation	
shall be protected with an approved filter membrane material. The pipe or tile shall be placed on not less than 2" of gravel or crushed stone	, and
shall be covered with not less than 6" of the same material. Section 1813.5.2	
4. Foundations anchors shall be a minimum of ½" in diameter, 7" into the foundation wall, minimum of 12" from corners of foundation and a	
maximum 6' O.C. between bolts. Section 2305.17	
5. Waterproofing and dampproofing shall be done in accordance with Section 1813.0 of the building code.	
6. Precaution must be taken to protect concrete from freezing. Section 1908.0	
7. It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to verify that t	the
proper setbacks are maintained.	•
Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior	
spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages atta	
side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area by means of 1/2 inch	
gypsum board or the equivalent applied to the garage side. (Chapter 4, Section 407.0 of the BOCA/1999)	
. All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National Mechanic	al
Code/1993). Chapter 12 & NFPA 211	
0. Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 1214.0 of the City's Building Code.	
1. Guardrails & Handrails: A guardrail system is a system of building components located near the open sides of elevated walking surfaces for	
purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use Groups 42".	. In
occupancies in Use Group A, B.H-4, I-1, I-2, M, R, public garages and open parking structures, open guards shall have balusters or be of sol	iđ
material such that a sphere with a diameter of 4" cannot pass through any opening. Guards shall not have an ornamental pattern that would	
provide a ladder effect. Handrails shall be a minimum of 34" but not more than 38". Exception: Handrails that form part of a guard shall he	ave
a height not less than 36 inches (914 mm) and not more than 42 inches (1067 mm). Handrail grip size shall have a circular cross section with	n an
outside diameter of at least 1 1/2" and not greater than 2". (Sections 1021 & 1022.0). Handrails shall be on both sides of stairway. (Section	
1014.7)	
2. Headroom in habitable space is a minimum of 7'6". (Section 1204.0)	4
3. Stair construction in Use Group R-3 & R-4 is a minimum of 10" tread and 7 3/2" maximum rise. All other Use Group minimum 11" tread	-,
7" maximum rise. (Section 1014.0)	
The minimum headroom in all parts of a stairway shall not be less than 80 inches. (6'8") 1014.4	
Every sleeping room below the fourth story in buildings of Use Groups R and I-1 shall have at least one operable window or exterior door	
approved for emergency egress or rescue. The units must be operable from the inside without the use of special knowledge or separate tools.	••
Where windows are provided as means of egress or rescue they shall have a sill height not more than 44 inches (1118mm) above the 1100r. A	ш
egress or rescue windows from sleeping rooms shall have a minimum net clear opening height dimension of 24 inches (610mm). The minimum	um
net clear opening width dimension shall be 20 inches (508)mm, and a minimum net clear opening of 5.7 sq. ft. (Section 1010.4)	
n i i i i i i i i i i i i i i i i i i i	

from the apartment to the building exterior with no communications to other apartment units. (Section 1010.1) 17. All vertical openings shall be enclosed with construction having a fire rating of at least one (1) hour, including fire doors with self closure's. (Over 3 stories in height requirements for fire rating is two (2) hours. (Section 710.0)

16. Each apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable when it exits directly

18. The boiler shall be protected by enclosing with (1) hour fire rated construction including fire doors and ceiling, or by providing automatic extinguishment. (Table 302.1.1)

- 19. All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the City's Building Code Chapter 9, Section 920.3.2 (BOCA National Building Code/1999), and NFPA 101 Chapter 18 & 19. (Smoke detectors shall be installed and maintained at the following locations):
  - . In the immediate vicinity of bedrooms
  - · In all bedrooms
  - In each story within a dwelling unit, including basements
- 20. A portable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved agency and be of an approved type. (Section 921.0)
- 21. The Fire Alarm System shall be installed and maintained to NFPA #72 Standard.
- 22. The Sprinkler System shall be installed and maintained to NFPA #13 Standard.
- 23. All exit signs, lights and means of egress lighting shall be done in accordance with Chapter 10 Section & Subsections 1023.0 & 1024.0 of the City's Building Code. (The BOCA National Building Code/1999)
- 24. Section 25 135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a permit to excavate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year".
- 25. The builder of a facility to which Section 4594-C of the Maine State Human Rights Act Title 5 MRSA refers, shall obtain a certification from a design professional that the plans commencing construction of the facility, the builder shall submit the certification the Division of Inspection Services.
- 26. Ventilation and access shall meet the requirements of Chapter 12 Sections 1210.0 and 1211.0 of the City's Building Code. (Crawl spaces & attics).
- 27. All electrical, plumbing and HVAC permits must be obtained by Master Licensed holders of their trade. No closing in of walls until all electrical (min. 72 hours notice) and plumbing inspections have been done.
- 28. All requirements must be met before a final Certificate of Occupancy is issued.
- 29. All building elements shall meet the fastening schedule as per Table 2305.2 of the City's Building Code (The BOCA National Building Code/1996).
- 30. Ventilation of spaces within a building shall be done in accordance with the City's Mechanical code (The BOCA National Mechanical Code/1993). (Chapter M-16)

  31. Please read and implement the attached Land Use Zoning report requirements.
- 32. Boring, cutting and notching shall be done in accordance with Sections 2305.3, 2305.3.1, 2305.4.4 and 2305.5.1 of the City's Building Code.
- 33. Bridging shall comply with Section 2305.16.

McDougall, PFD

Mafge Schmuckal, Zoning Administrator

- 34. Glass and glazing shall meet the requirements of Chapter 24 of the building code. (Safety Glazing Section 2406.0)
- 35. All signage, shall be done in accordance with Section 3102.0 signs of the City's Building Code, (The BOCA National Building Code/1999).

  36. All flashing shall comply with Section 1406.3.10.

All wood in Contact with The earth Shall be

	• •	
		•
0 16	·	

PSH 10/1/00

\*\*This permit is herewith issued, on the basis of plans submitted and conditions placed on these plans, any deviations shall require a separate approval.

...THIS PERMIT HAS BEEN ISSUED WITH THE UNDERSTANDING THAT ALL THE CONDITIONS OF THE APPROVAL SHALL BE COMPLETED. THEREFORE, BEFORE THE WORK IS COMPLETED A REVISED PLAN OR STATEMENT FROM THE PERMIT HOLDER SHALL BE SUBMITTED TO THIS OFFICE SHOWING OR EXPLAINING THAT THE CONDITIONS HAVE BEEN MET. IF THIS REQUIREMENT IS NOT RECEIVED YOUR CERTIFICATE OF OCCUPANCY SHALL BE WITHHELD.

\*\*\*\*ALL PLANS THAT REQUIRE A PROFESSIONAL DESIGNER'S SEAL, (AS PER SECTION 114.0 OF THE BUILDING CODE) SHALL ALSO BE PRESENTED TO THIS DIVISION ON AUTO CAD LT. 2000, DXF FORMAT OR EQUIVALENT.