


ROOM FINISH SCHEDULE												
ROOM #	ROOM NAME	WALLS				BASE	CEILING			REMARKS	PS	PAINT COLOR
		NORTH	EAST	SOUTH	WEST		FLOOR	HT.	FINISH			
101	LOBBY	2	2	2	2	11	20, 23	30	-	3 HR		

FINISH SCHEDULE KEY	
WALLS	
1	GWB - PAINTED
2	WOOD SLAT - STAINED FINISH
3	FIBERGLASS REINFORCED PLASTIC (FRP) PANELS
4	WOOD PANEL WITH EDGE BAND
5	HIGH IMPACT GWB - PAINTED
6	CMU - EPOXY PAINT
7	CONCRETE
8	FIBERCEMENT PANEL
9	STAINLESS STEEL ELEVATOR CAB PANEL
BASE	
10	VINYL (ON GWB ONLY)
11	WOOD SLAT - STAINED FINISH
12	1X4 WOOD - PAINTED FINISH, EASE EXPOSED TOP EDGE
FLOORS	
20	POLISHED CONCRETE WITH SEALER AND ANTI-SLIP CONDITIONER
21	CARPET TILE - TYPE 1
22	CARPET TILE - TYPE 2
23	COCOA MAT - RECESSED IN SLAB WITH CAST IN PLACE MTL EDGE TRIM
24	SEALED CONCRETE WITH NON-SLIP FINISH
25	RESILIENT PLANK - QUET COVER
26	12X24 PORCELAIN TILE - TYPE 1
27	12X24 PORCELAIN TILE - TYPE 2 - NON-SLIP FINISH
28	ASPHALT PAVING
CEILING	
30	GWB - PAINTED
31	24" X 24" LAY-IN ACOUSTICAL TILE WITH GRID SYSTEM
32	WOOD PANEL WITH EDGE BAND
33	STEEL PAN - PAINTED
34	EXTERIOR RATED GWB - PAINTED

PAINT SCHEDULE KEY	
TAG	COLOR
P1	CRUSHED ICE - SW 7047
P2	MODERN WHITE - SW 6168
P3	OLYMPUS WHITE - SW 6253
P4	MODERN WHITE - SW 6168
P5	BLACK (WALLS BEHIND WOOD SLAT SYSTEM)
P6	XXXXX
P7	XXXXX
P8	XXXXX
P9	XXXXX

CABINET AND TILE SCHEDULE KEY	
TAG	COLOR
TYPE 1	CRYSTAL ON MAPLE WITH GREEN PARADE - CW15 BACKSLASH TILE
TYPE 2	AUTUMN BROWN ON MAPLE WITH BLUE LAGOON - CW13 BACKSLASH TILE
TYPE 3	ESPRESSO ON MAPLE WITH SILVER MINN - CW04 BACKSLASH TILE

- ROOM FINISH GENERAL NOTES**
- ALSO SEE INTERIOR ELEVATIONS FOR GRAPHIC DEPICTIONS OF EXTENT OF FINISHES
 - INSTALL MOISTURE RESISTANT (MOLD AND MILDEW RESISTANT) GWB IN ALL AREAS WHERE PLUMBING FIXTURES EXIST (CEILING AND WALLS IN BATHROOMS)
 - CLOSETS SHALL BE FINISHED AS THE ROOMS THEY SERVICE
 - ALL SPACES DESIGNATED AS CLOSET OR 'CL.' ARE TO RECEIVE ONE CLOTHING ROD 5'-2" AFF AND ONE 12" WIRE SHELF ABOVE THE ROD ALONG THE WALL OPPOSITE THE DOOR UNLESS NOTED OTHERWISE
 - ALL SPACES DESIGNATED AS LINEN CLOSETS (LIN) OR PANTRY (PAN) ARE TO RECEIVE FOUR 12" WIRE SHELVES SPACED AT 1'-0" OC STARTING AT FINISH FLOOR, UNLESS NOTED OTHERWISE
 - ALL LAUNDRY CLOSETS ARE TO RECEIVE ONE 12" SHELF AT 4'-0" A.F.F. UNLESS NOTED OTHERWISE
 - PROVIDE APPROPRIATE BLOCKING IN WALLS OF ALL BATHROOMS BEHIND FIXTURES, PARTITIONS AND ACCESSORIES. PROVIDE BLOCKING FOR GRAB BARS IN WALLS OF BATHROOMS
 - PROVIDE APPROPRIATE BLOCKING IN WALLS FOR DOOR STOPS
 - BOTTOM EDGE OF GWB ON WALL SURFACES TO BE HELD UP 1/2" FROM CONCRETE FLOOR SURFACES
 - PROVIDE VINYL TRANSITIONS STRIPS AT ALL FLOOR TRANSITIONS UNLESS OTHERWISE NOTED
 - UNLESS OTHERWISE NOTED IN DRAWINGS THE TYPICAL WALL TYPE IS 'NA'. ALL OTHER PARTITION TYPES WILL BE INDICATED.
 - VERIFY UNDERLAYMENT MEETS MANUFACTURERS SPECIFICATION AT RESILIENT FLOORING

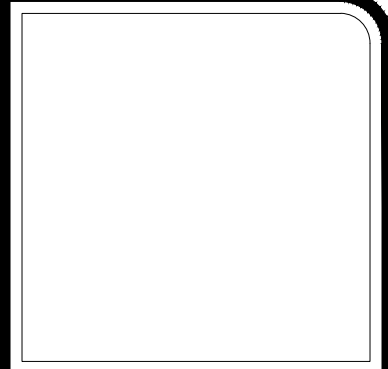

© 2015 RYAN SENATORE ARCHITECTURE

ADDITION TO BAYSIDE BOWL
 ALDER STREET
 PORTLAND, MAINE



RYAN SENATORE ARCHITECTURE
 585 CONGRESS STREET
 PORTLAND, MAINE 04101
 207-650-6414
 senatorearchitecture.com

CONSULTANTS:
STRUCTURAL:
 Structural Integrity
 77 Oak Street
 Portland, ME 04101
 207-774-4614

REVISIONS:

DATE: JUNE 09, 2015

PROJECT No. 1452

DRAWN BY: JPF / RRT / RJS

CHECKED BY: RJS

SCALE: AS NOTED

SHEET TITLE:
FINISH SCHEDULE

PROGRESS PRINT ONLY
 Not for Construction
 JUNE 09, 2015

A7-2