

1ST FLOOR FRAMING PLAN
 1/8"=1'-0"


TOP OF STEEL ELEV = 105'-1" UNLESS NOTED (4X). ALL BEAMS PARALLEL TO JOISTS ARE (+2 1/2").

TYPICAL FLOOR SLAB IS GALVANIZED, 24 GAGE, 10 CSV NON-COMPOSITE STEEL DECK BY VULCRAFT WITH 1 1/2" CONCRETE TOPPING (TOTAL THICKNESS = 2 1/2") WITH 6x6-W1.4x1.4 WWF LOCATED 3/4" FROM THE TOP SURFACE.

INDICATES GALVANIZED, 18 GAGE, 15 VLI COMPOSITE STEEL DECK BY VULCRAFT WITH 3 1/2" CONCRETE TOPPING (TOTAL THICKNESS = 5") WITH 6x6-W2.1x2.1 WWF LOCATED 1 1/2" FROM THE TOP SURFACE.

(X) INDICATES NUMBER OF 3/4" x 4 1/2" HEADED STUDS.

NOTE:
 ADJUST LAYOUT OF JOISTS TO AVOID PLUMBING DROPS. 36" MAXIMUM CENTER TO CENTER SPACING OF JOISTS SPACING.

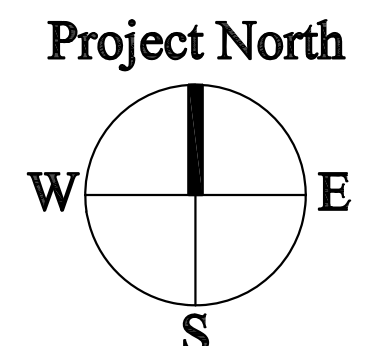

Date: 03 Feb 2014	Scale: 1/8" = 1'-0"	Revisions: Issued for Construction 02/03/14	Project: PRESERVATION PHASE THE INN AT DIAMOND COVE McKINLEY COURT GREAT DIAMOND ISLAND, MAINE	Architect: ARCHETYPE architects 48 Union Wharf Portland, Maine 04101 (207) 772-6022 Fax (207) 772-4056	Structural Engineer: STRUCTURAL CONSULTING 22 Oakmont Drive Old Orchard Beach ME 04064-4121 Tel: 207.834.8038 Fax: 207.834.8039	Prepared For: The Inn at Diamond Cove, LLC. PO BOX 3572 PORTLAND, ME 04101	