City of Portland, Maine – Buildin	g of Ose Fernit Applica	tion 369 Congress		04101, 1et. (207) 8		
Location of Construction:	Owner:		Phone:		Permit No. 9 9 0 4 5 3	
16 Seashore Ave. Peaks Island	* Thomas S. P			799-8824		
Owner Address: *94 Hillside ave. So. Portland 04	Lessee/Buyer's Name:	Phone:	Busines	ssName:	PERMIT ISSUED	
Contractor Name:	Address:	Phon	ne:		Permit Issued:	
Contractor Ivanic.	Address.	T HOI			1 2 1000	
Past Use:	Proposed Use:	COST OF WOR	RK:	PERMIT FEE:	MAY 1 2 1999	
Single Family	Same	\$ 150.00		\$ 25.00		
		FIRE DEPT.	Approved	INSPECTION:	CITY OF PORTLAND	
			Denied	Use Group 7 Typ 5 B		
	4			130CA 86/ DD	Zone: CBL: 084-H-021	
Door and Drainst Description	1	Signature:		Signature.	Zoning Approval:	
Proposed Project Description:				ES DISTRICT JP.A.D.	11 35/1/17	
HOVE BEALES		Action:	Approved		Special Zone or Reviews:	
			Denied	with Conditions:	Shoreland	
			Demed		☐ Wetland ☐ Flood Zone	
		Signature:		Date:	□ Subdivision	
Permit Taken By:	Date Applied For:				□ Site Plan maj □minor □mm □	
U.B.		May 7th, 1999				
1 701	A B A A A A A A A A A A A A A A A A A A	1 C 1 F. J			Zoning Appeal Variance	
1. This permit application does not preclude the		ole State and Federal rules.			Miscellaneous	
2. Building permits do not include plumbing, se	eptic or electrical work.				□ Conditional Use	
3. Building permits are void if work is not starte		of issuance, False informa-			□ Interpretation	
tion may invalidate a building permit and sto	op all work				□ Approved	
			0-	IT ISSUED VIREMENTS	□ Denied	
		14	WITTERM	15	Historic Preservation	
			HA RED	□ Not in District or Landmark		
			-61	TREMED	□ Does Not Require Review	
				ENTO	□ Requires Review	
				.,0	Action:	
					727.7	
	CERTIFICATION		Control Marie		Appoved	
I hereby certify that I am the owner of record of th					☐ Approved with Conditions ☐ Denied	
authorized by the owner to make this application if a permit for work described in the application is					- Demed	
areas covered by such permit at any reasonable h				ive the authority to enter an	Date:	
areas covered by such permit at any reasonable in	our to emoree the provisions of the	code(s) applicable to such	permit			
		Man 7ab 1	000		Ab .	
CICNATUDE OF ADDI ICANIT	ADDRECC.	May 7th, 1	737	DHONE		
SIGNATURE OF APPLICANT	ADDRESS:	DATE:		PHONE:		
RESPONSIBLE PERSON IN CHARGE OF WOR	K, TITLE			PHONE:	CEO DISTRICT	
100 to 10	ermit Nask Green-Assessor's	O D DW		0.11	2	

And the second section of the section of the second section of the section of the second section of the second section of the sectio

			Date
			Type Foundation: Framing: Plumbing: Final: Other:
Coplital			
2/18/00			

	BUILDING PERMIT REPORT
	DATE: 1/ May 99 ADDRESS: 16 Sea Shone AUR. CBL: 084-H-021
	DATE: 1/ May 99 ADDRESS: 16 Seashore AUP. CBL: 084-H-02/ REASON FOR PERMIT: 10 MOVE STAIRS
	BUILDING OWNER: Thomas S. Perron
	PERMIT APPLICANT: /Contractor
	USE GROUP 19-3 BOCA 1996 CONSTRUCTION TYPE
	CONDITION(S) OF APPROVAL
	This permit is being issued with the understanding that the following conditions are met:
17	Approved with the following conditions: * 1 * 11 * 13 . * 29
	 This permit does not excuse the applicant from meeting applicable State and Federal rules and laws. Before concrete for foundation is placed, approvals from the Development Review Coordinator and Inspection Services must be obtained. (A 24 hour notice is required prior to inspection) Foundation drain shall be placed around the perimeter of a foundation that consists of gravel or crushed stone containing not more than
	10 percent material that passes through a No. 4 sieve. The drain shall extend a minimum of 12 inches beyond the outside edge of the footing. The thickness shall be such that the bottom of the drain is not higher than the bottom of the base under the floor, and that the top of the drain is not less than 6 inches above the top of the footing. The top of the drain shall be covered with an approved filter membrane material. Where a drain tile or perforated pipe is used, the invert of the pipe or tile shall not be higher than the floor elevation. The top of joints or top of perforations shall be protected with an approved filter membrane material. The pipe or tile shall be placed on not less than 2" of gravel or crushed stone, and shall be covered with not less than 6" of the same material. Section 1813.5.2 4. Foundations anchors shall be a minimum of ½" in diameter, 7" into the foundation wall, minimum of 12" from corners of foundation and
	a maximum 6' o.c. between bolts. (Section 2305.17) 5. Waterproofing and damp proofing shall be done in accordance with Section 1813.0 of the building code.
	6. Precaution must be taken to protect concrete from freezing. Section 1908.0 7. It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to verify
	that the proper setbacks are maintained. 8. Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area by means of ½ inch gypsum board or the equivalent applied to the garage side. (Chapter 4, Section 407.0 of the BOCA/1996)
	All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National Mechanical Code/1993). Chapter 12 & NFPA 211
	0. Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 1214.0 of the City's Building
	Guardrails & Handrails: A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use Groups 42", except Use Group R which is 36". In occupancies in Use Group A, B, H-4, I-1, I-2, M and R and public garages and open parking structures, open guards shall have balusters or be of solid material such that a sphere with a diameter of 4" cannot pass through any opening. Guards shall not have an ornamental pattern that would provide a ladder effect. (Handrails shall be a minimum of 3e4" but not more than 38". Use Group R-3 shall not be less than 30", but not more than 38".) Handrail grip size shall have a circular cross section with an outside diameter of at least 1 ½" and not greater than 2". (Sections 1021 & 1022.0) - Handrails shall be on both sides of stairway. (Section 1014.7)
1	 Headr∞m in habitable space is a minimum of 7'6". (Section 1204.0)
1.	The minimum headroom in all parts of a stairway shall not be less than 80 inches. (6'8") 1014.4 Every sleeping room below the fourth story in buildings of Use Groups R and I-1 shall have at least one operable window or exterior door approved for emergency egress or rescue. The units must be operable from the inside without the use of special knowledge or separate tools. Where windows are provided as means of egress or rescue they shall have a sill height not more than 44 inches (1118mm) above the floor. All egress or rescue windows from sleeping rooms shall have a minimum net clear opening height dimension of 24 inches (610mm). The minimum net clear opening width dimension shall be 20 inches (508mm), and a minimum net clear opening of 5.7 sq. ft. (Section 1018.6)
16	Each apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable when it exits

directly from the apartment to the building exterior with no communications to other apartment units. (Section 1010.1)

closer's. (Over 3 stories in height requirements for fire rating is two (2) hours.) (Section 710.0)

All vertical openings shall be enclosed with construction having a fire rating of at least one (1) hour, including fire doors with self . .

17.

18. The boiler shall be protected by enclosing with (1)hour fire rated construction including fire doors and ceiling, or by providing automatic extinguishment. (Table 302.1.1)

المن المناه المن

- 19. All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the City's Building Code Chapter 9, Section 920.3.2 (BOCA National Building Code/1996), and NFPA 101 Chapter 18 &19. (Smoke detectors shall be installed and maintained at the following locations):
 - In the immediate vicinity of bedrooms
 - In all bedrooms
 - In each story within a dwelling unit, including basements

In addition to the required AC primary power source, required smoke detectors in occupancies in Use Groups R-2, R-3 and I-1 shall receive power from a battery when the AC primary power source is interrupted. (Interconnection is required) Section 920.3.2.


- 20. A portable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved agency and be of an approved type. (Section 921.0)
- 21. The Fire Alarm System shall maintained to NFPA #72 Standard.
- 22. The Sprinkler System shall maintained to NFPA #13 Standard.
- 23. All exit signs, lights and means of egress lighting shall be done in accordance with Chapter 10 Section & Subsections 1023.0 & 1024.0 of the City's Building Code. (The BOCA National Building Code/1996)
- 24. Section 25-135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a permit to excavate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year".
- 25. The builder of a facility to which Section 4594-C of the Maine State Human Rights Act Title 5 MRSA refers, shall obtain a certification from a design professional that the plans commencing construction of the facility, the builder shall submit the certification the Division of Inspection Services.
- 26. Ventilation shall meet the requirements of Chapter 12 Sections 1210.0 of the City's Building Code. (Crawl spaces & attics).
- 27. All electrical, plumbing and HVAC permits must be obtained by a Master Licensed holders of their trade. No closing in of walls until all electrical (min. 72 hours notice) and plumbing inspections have been done.
- 28. All requirements must be met before a final Certificate of Occupancy is issued.
- All building elements shall meet the fastening schedule as per Table 2305.2 of the City's Building Code (the BOCA National Building Code/1996).
 - 30. Ventilation of spaces within a building shall be done in accordance with the City's Mechanical Code (The BOCA National Mechanical Code/1993). (Chapter M-16)
 - 31. Please read and implement the attached Land Use Zoning report requirements.
 - 32. Boring, cutting and notching shall be done in accordance with Sections 2305.4.4, 2305.5.1 and 2305.5.3 of the City's Building Code.
 - 33. Glass and glazing shall meet the requirements of Chapter 24 of the building code.
 - 34.

nuel Hoffses, Building Inspector

Marge Schmuckal, Zoning Administrator

PSH 12-14-98

**On the basis of plans submitted and conditions placed on these plans any deviations shall require a separate approval.

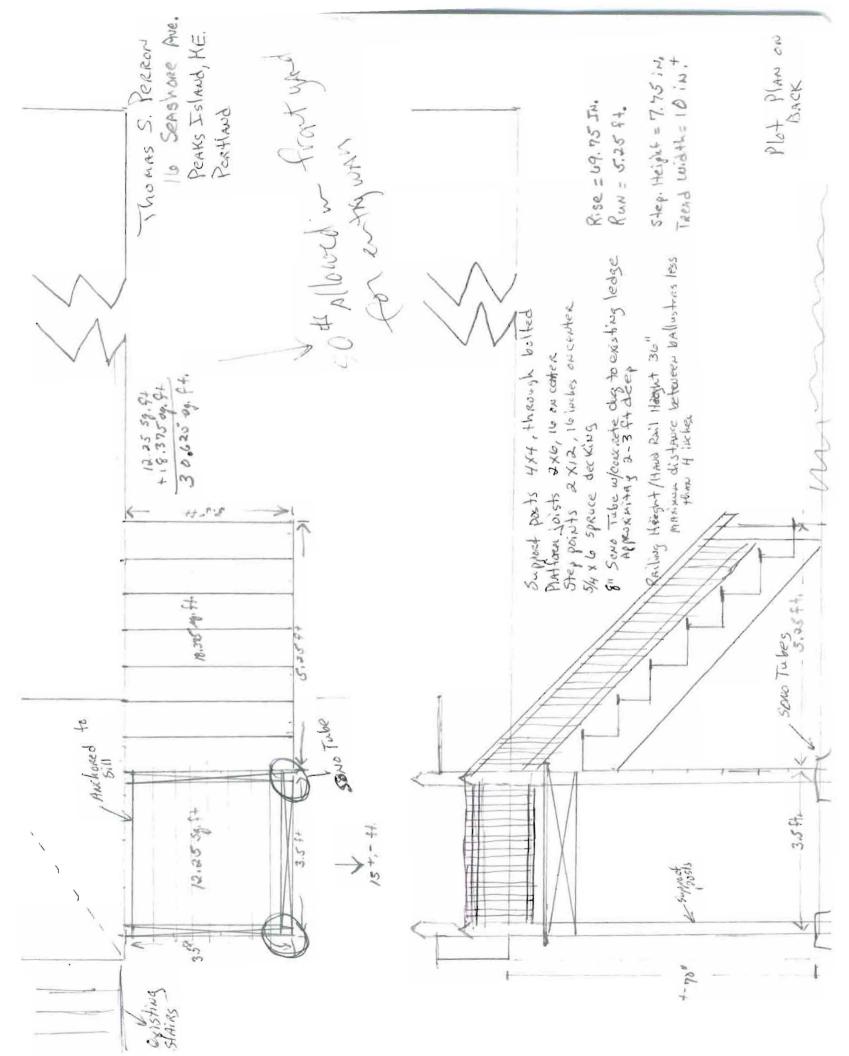

THIS IS NOT A PERMIT/CONSTRUCTION CANNOT COMMENCE UNTIL THE PERMIT IS ISSUED

Building or Use Permit Pre-Application Additions/Alterations/Accessory Structures To Detached Single Family Develling

To Detached Single Family Dwelling

In the interest of processing your application in the quickest possible manner, please complete the Information below for a Building or Use Permit.

NOTE**If you or the property owner owes real estate or personal property taxes or user charges on any property within the City, payment arrangements must be made before permits of any kind are accepted.

Location/Address of Construction: 16 Seashore Aur PI	
Tax Assessor's Chart, Block & Lot Number Chart# 084 Block# H Lot# 021 Thomas S. Perron	Telephone#: 799-8824
Owner's Address: 94 Hills: de Ave, MAine 04106 Lessee Buyer's Name (If Applicable)	Cost Of Work: Fee \$25
Proposed Project Description:(Please be as specific as possible)	
Move stairs from one side of a Porch to ANOT	there
Contractor's Name. Address & Telephone W/A - OWNER	Rec'd By: UB
*All Electrical Installation must comply with the 1996 National Electrical Code a *HVAC(Heating, Ventilation and Air Conditioning) installation must comply with You must Include the following with you application: 1) A Copy of Your Deed or Purchase and Sale Ag 2) A Copy of your Construction Contract, if av 3) A Plot Plan (Sample Attached)	the 1993 BOCA Mechanical Code. greement
If there is expansion to the structure, a complete plot plan (Site Plan) must in	nclude:
 The shape and dimension of the lot, all existing buildings (if any), the proposed struproperty lines. Structures include decks porches, a bow windows cantilever section pools, garages and any other accessory structures. 	
Scale and required zoning district setbacks	MAY 7 1999
4) Building Plans (Sample Attached)	
A complete set of construction drawings showing all of the following eleme	nts of construction:
 Cross Sections w/Framing details (including porches, decks w/ railings, and access 	sory structures)
Floor Plans & Elevations Window and door schedules	
Foundation plans with required drainage and dampproofing	
Electrical and plumbing layout. Mechanical drawings for any specialized equipment	nt such as furnaces, chimneys, gas
equipment. HVAC equipment (air handling) or other types of work that may requi	
Certification	
I hereby certify that I am the Owner of record of the named property, or that the proposed we and that I have been authorized by the owner to make this application as his/her authorized a	ork is authorized by the owner of reco
and that I have been authorized by the owner to make this application as his/her authorized a laws of this jurisdiction. In addition, if a permit for work described in this application is issue	ed. I certify that the Code Official's
authorized representative shall have the authority to enter all areas covered by this permit at	any reasonable hour to enforce the
provisions of the codes applicable to this permit.	
	e: 5/7/99
Signature of applicant forms forms Dat	.0/1/74

O: INSP/CORRESP/MNUGENT/APADSFD.WPD



Inspection Services Michael J. Nugent Manager Department of Urban Development Joseph E. Gray, Jr. Director

CITY OF PORTLAND



Building or Use Permit Application Additions/Alterations/Accessory Structures To Detached Single Family Dwelling

As an applicant for a building permit, you are about to enter into a relationship with our Office. We welcome any questions, comments or suggestions that will make the process more efficient. Attached you will find an application and some samples of the submissions you will provide at application time. Please read <u>ALL</u> of the information and if you need any further assistance please call 874-8703 or 874-8693.

