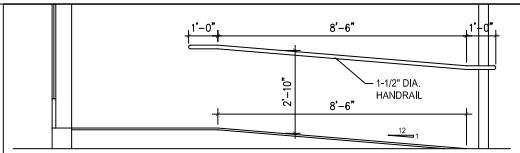

5b ADA RAMP HANDRAIL ELEV.
SCALE: 1/2"=1'-0"

DOOR SCHEDULE

DOOR No.	NEW / EXISTING	SIZE W x H x T	DOOR Type	DOOR Material	HARDWARE	FRAME Material	RATING	REMARKS
A	NEW	3'-0" x 6'-8" x 1 3/4"	1	S. C. Oak Slab		Wood		
B	NEW	3'-0" x 6'-8" x 1 3/4"	1	Insul. Metal	Lever Handle, Kick Plate, Closer	Metal		Demo existing door
C	NEW	3'-0" x 6'-8" x 1 3/4"	1	S. C. Oak Slab	Lever Handle, Closer	Wood		
D	NEW	2'-0" x 6'-8" x 1 3/4"	1	H.C. Wood	Knob with keyed lock	Wood		
E	NEW	(2) 2'-0" x 6'-8" x 1 3/4"	2	H.C. Wood	Knob with keyed lock	Wood		
F	EXISTING	3'-0" x 6'-8" x 1 1/2"		Alum./Glass	Push Pull Hardware, Weather Stripping, Alum Thrsh	Alum		Existing Door to Remain
G	NEW	3'-0" x 6'-8" x 1 3/4"	1	S. C. Oak Slab	Lever Handle, Kick Plate, Closer, push button lock	Wood		
H	NEW	2-8" x 6'-8" x 1 3/4"	1	S. C. Oak Slab	Lever Handle, Kick Plate, Closer, push button lock	Wood		



ILLUMINATED EXIT SIGN
EMERGENCY LIGHTING
EXIT/LIGHTING COMBO
HORN/ STROBE
FIRE EXTINGUISHER

NEW 2x4 AND 5/8" GYP WALL TO UNDERSIDE OF ROOF DECK
NEW 2x4 AND 5/8" GYP WALL 8' HIGH
EXISTING WALL

OFFICE/STUDIO SPACE = 842sqft
- occupancy load 100sqft/person = 9
TABLE + CHAIR SEATING/STAGE = 705 sqft
- occupancy load 15sqft/person = 47

TOTAL OCCUPANCY LOAD = 56

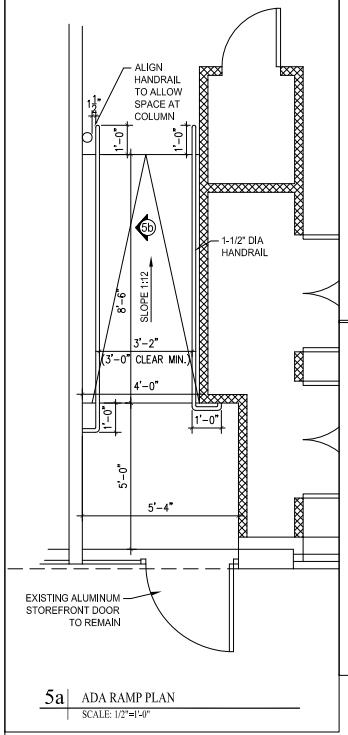

5a ADA RAMP PLAN
SCALE: 1/2"=1'-0"



4a ADA BATHROOM ELEVATION DETAILS
SCALE: 1/2"=1'-0"



4b ADA BATHROOM ELEVATION DETAILS
SCALE: 1/2"=1'-0"

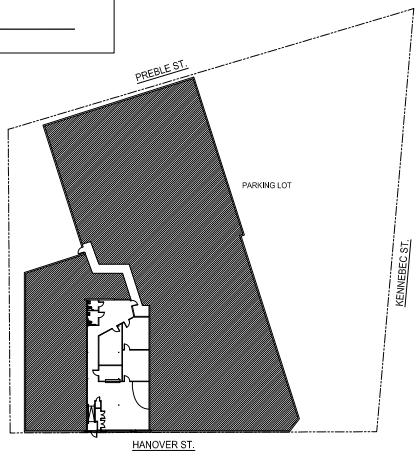

3 KEY PLAN
SCALE: 1/16"=1'-0"

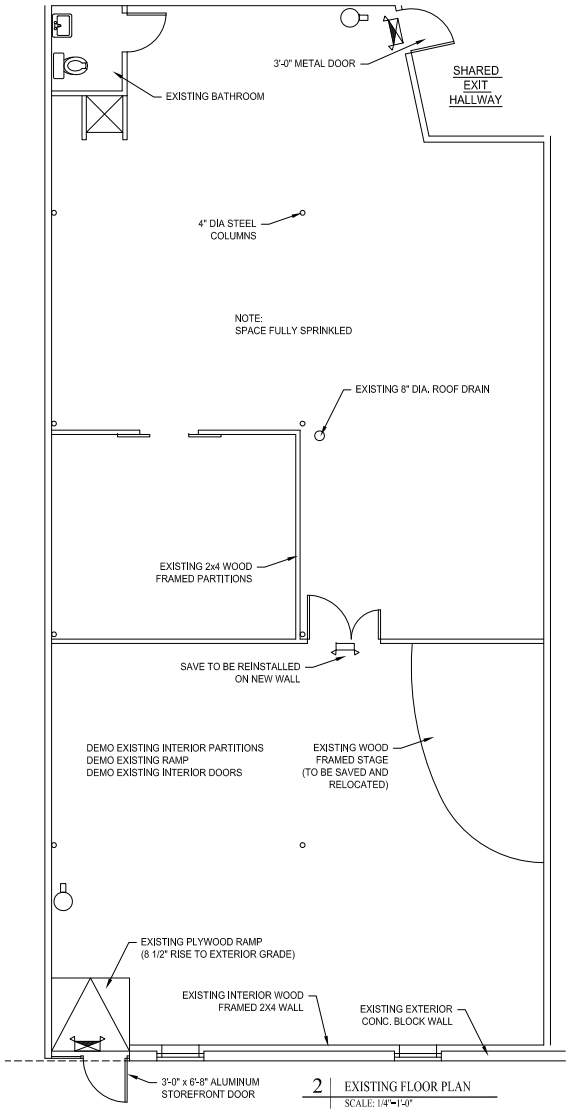

2 EXISTING FLOOR PLAN
SCALE: 1/4"=1'-0"

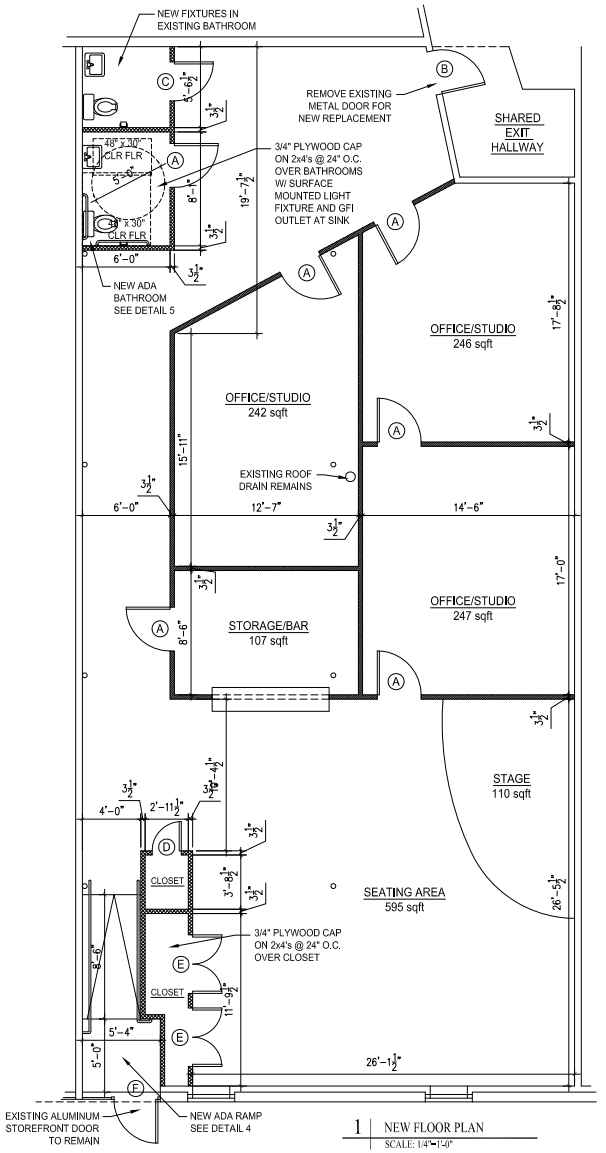

1 NEW FLOOR PLAN
SCALE: 1/4"=1'-0"

Contact:
Patrick Corrigan
107 Hanover St.
PORTLAND, MAINE
(207) 450-8187

Project:
107 HANOVER ST. STUDIOS
107 Hanover St.
PORTLAND, MAINE

Revisions:

Scale: AS NOTED

Date: 25 JAN 2016

EXISTING SPACE and PROPOSED FIT-UP

A1