

GENERAL NOTES:

- A. GENERAL CONTRACTOR SHALL PROVIDE SELECT FILL MATERIAL FOR NEW SLABS.
- B. GENERAL CONTRACTOR TO CUT AND REMOVE EXISTING CONCRETE SLABS AS NEEDED IN AREAS INDICATED ON DRAWING - PATCH AND REPAIR SLAB AT SLAB CUTS TO MATCH EXISTING ADJACENT SLABS AND THICKNESS. (NOTE: MINIMUM SLAB THICKNESS IS 4")
- C. GENERAL CONTRACTOR SHALL PROVIDE COMPACTED BACK FILL AT DISTURBED AREAS WHERE SLABS ARE CUT AND REMOVED.

FINISH NOTES:

- D. PATCH AND REPAIR EXISTING FINISHED CONCRETE SLAB IN AREA OF RELOCATED RESTROOM - SLAB TO BE PREPARED TO RECIEVE NEW TILE FLOORING
- E. PATCH AND REPAIR EXISTING FINISHED CONCRETE SLAB IN AREA OF NEW JANITOR CLOSET LOCTION - SLAB TO BE CLEAN, SHOT BLASTED AND SEALED
- F. PROVIDED CONCRETE TOPPING AT AREA OF REMOVED PORCELAIN TILE FLOORING - TOPPING TO BE LEVEL WITH EXISTING FINIHSED CONCRETE FLOOR SLAB IN EXISTING PRODUCE COOLER
- G. PATCH AND REPAIR EXISTING FINISHED CONCRETE SLAB IN AREA OF EXPANDED PRODUCE PREP COOLER - SLAB TO BE CLEAN, SHOT BLASTED AND SEALED

JOINT NOTES:

- H. ALL SLAB CONTROL AND CONSTRUCTION JOINTS SHALL HAVE JOINT FILLER INSTALLED.
- I. GENERAL CONTRACTOR SHALL PROTECT CONCRETE SLABS WHICH WILL BE EXPOSED TO VIEW.


KEY NOTES: REPRESENTED BY THIS SYMBOL: 

- 1. LINE OF EXISTING STRUCTURAL CONCRETE GRADE BEAM BELOW EXISTING CONCRETE STRUCTURAL SLAB - TYPICAL
- 2. REMOVE EXISTING VCT FLOOR FINISH COMPLETE - PATCH, REPAIR AND PREP EXISTING CONCRTE SLAB FOR NEW FLOOR FINISH
- 3. REMOVE EXISTING PORCELAIN TILE AND SETTING MATERIAL COMPLETE TO EXISTING CONCRETE SLAB
- 4. REMOVE EXISTING QUARRY TILE AND SETTING MATERIAL COMPLETE TO EXISTING CONCRETE SLAB
- 5. EXISTING FLOOR DRAINS TO REMAIN
- 6. DISH CONCRETE TOPPING AROUND EXISTING DRAIN TO CREATE POSITIVE DRAINAGE TO DRAIN
- 7. REMOVE EXISTING VCT FLOOR TILE - PROVIDE FLOOR FEATHER TO TRANSITION TO NEW FLOOR FLINISH - NOTE TRANSITION TO BE ADA COMPLIANT WITH SLOPE NOT GREATER THAN 1 : 12
- 8. NEW FLOOR DRAIN COORDINATE LOCATION WITH EXISTING STRUCTRUAL GRADE BEAMS
- 9. GRIND JOINT AT CONCRETE TOPPING AND EXISTING CONCRETE SLAB TO BE LEVEL AND FLUSH - SHOT BLAST DISTURBED AREA


GRAPHIC LEGEND:




SHOT BLAST AND SEAL CONCRETE SLAB




PROVIDE CONCRETE TOPPING AS NEEDED AT REMOVED PORCELAIN TILE FLOOR TO CREATE SMOOTH LEVEL FLOOR SLAB WITH LEVEL SMOOTH JOINT AT EXISTING



PATCH AND REPAIR EXISTING CONCRETE SLAB AS NEEDED FOR NEW FLOOR FINISH

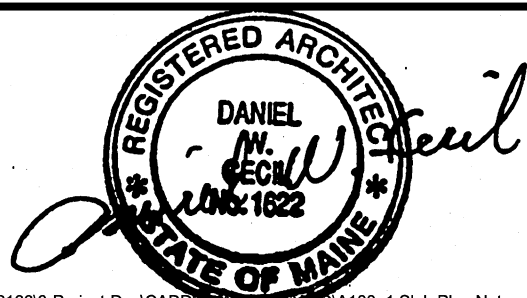

NO	REVISIONS	DATE	BY
0	ISSUED FOR REVIEW	11-10-16	MJW
0	ISSUED FOR CONSTRUCTION	11-14-16	MJW



HARRIMAN
© 2016
Project No. 16166

Auburn, ME 207.784.5100
Portland, ME 207.775.0053
Portsmouth, NH 603.626.1242
Boston, MA 617.426.5050

DWG TITLE: **SLAB COORDINATION PLAN NOTES**
LOCATION: **PRODUCE COOLER AND RESTROOMS
PORTLAND, ME**

SCALE: 1/8"=1'-0"
DRAWN: MJW
DATE: 11-14-2016
DRAWING NO. **A100.1**
Store No. 8351