					<u>IIT ISSU</u>	IED		
City of Portland, Maine 389 Congress Street, 04101	- Building or Use Tel: (207) 874-8703	Permit Applicatio 3, Fax: (207) 874-871	.	ouit No: 01-0590	Issue Date: N 8 200		CBL: 085 E0	01001
ocation of Construction: Owner Name: 35 Veteran St P.1 Rastallis Jane Mastellis Jane Mastellis Business Name: Contractor Name: n/a		Y Etal 5 Ap		Dwner Address: 5 Appleton St #3d Bpst R. M. ADD Contractor Address: n/a Portland		LAND	Phone: 520-800-1843	
						Phone		
Lessee/Buyer's Name	Phone:		Permit		ellings			Zone: T.R-7
Past Use: single family	Proposed Use: single family.	Proposed Use: single family. Mail permit when					CO District: 3	
	ready		FIRE	DEPT:	Annual	INSPECT	R-3 #/BC./	Type:53
Proposed Project Description: replace roof, replace both rotted porches as needed Not to increase The EHStize (00)			Signature: Sj PEDESTRIAN ACTIVITIES DISTRU Action: Approved Approv			Sjevenes Huer (P.A.	A LALL	
Permit Taken By: Date Applied For: jodinea 05/31/2001			Signature: Date: Zoning Approval					
 This permit application de Applicant(s) from meeting Federal Rules. 	-	Special Zone or Revi	150	Zonii Variance	ng Appeal		Historie Pres	
 Building permits do not in septic or electrical work. 	clude plumbing,	Wetland		🔲 Miscetle	10003		Does Not Re	quire Review
 Building permits are void if work is not started within six (6) months of the date of issuance. False information may invalidate a building permit and stop all work 		Flood Zone		Conditional Use			Requires Review	
		Subdivision	l				Approved	Conditions
		Maj 🛄 Minor 📑 MM		Denied			Denied	\frown
		of with in	1.72-1	Ľ		}	1	-

CERTIFICATION

I hereby certify that I am the owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been authorized by the owner to make this application as his authorized agent and I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in the application is issued, I certify that the code official's authorized representative shall have the authority to enter all areas covered by such permit at any reasonable hour to enforce the provision of the code(s) applicable to such permit.

BUILDING PERMIT REPORT				
DATE 27MAY 260 / ADDRESS: 35 VETTERS P. I CBL: 085- E-001				
REASON FOR PERMIT: Be place roof (Jaterior / exterior resourtions				
BUILDING OWNER: Jane RozThallis				
PERMIT APPLICANT:				
USE GROUP: $\underline{B-3}$ construction type: <u>5</u> Construction cost: <u>16,000,000</u> permit fees. <u>120,9</u> μ				
The City's Adopted Building Code (The BOCA National Building Code/1999 with City Amendments) The City's Adopted Mechanical Code (The BOCA National Mechanical Code/1993)				
CONDITION(S) OF APPROVAL				
This permit is being issued with the understanding that the following conditions shall be met: $\frac{\frac{1}{2}}{\frac{28}{12}}$				
 1. This permit does not excuse the splicant from meeting applicable State and Federal rules and laws. 2. Before concrete for foundation is placed, approvals from the Development Review Coordinator and Inspection Services must be obtained. (A 24 hour notice is required prior to inspection) "ALL LOT LINES SHALL BE CLEARLY MARKED BEFORE CALLING." 3. Foundation drain shall be placed around the perimeter of a foundation that consists of gravel or crushed stone containing not more than 10 percent material lake passes through a No. 4 sieve. The drain shall excused a minimum of 12 inches beyond the outside edge of the footing. The thickness shall be auch that the top of the drain is not higher than the bottom of the base under the floor, and that the top of the drain is not less than 6 inches above the top of the footing. The top of the drain shall be covered with an approved filter membrane material. The pipe or tile shall not be order value. The top of performations shall be protected with an approved filter membrane material. The pipe or tile shall be placed on not less than 2" of gravel or crushed stone, and shall be covered with not less than 6" of the same material. Section 1813.5.2 4. Foundations nectors shall be a minimum of 30% in diameter, 7" into the foundation wall, minimum of 12" from corners of foundation and a maximum 6' O.C. between bolts. Section 3205.112 5. Waterproofing and dampproofing shall be done in ascordance with Section 1913.9.11.8.10/ Masonry Sections 2111.3-2111.4. 7. It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to verify that the proper stabacks are malfriand. 8. Private garages located beneath habitable rooms in occupancies hall be completely separated from the taits area by means of % inch grays are material. Section 1908.9-19.8.10/ Masonry Sections 2111.3-2111.4. 9. All chimneys and vents shall be installed and maintained as prectively w				
 1014.7) 12. Headroom in habitable space is a minimum of 7'6". (Section 1204.0) X 13. Stair construction in Use Group R-3 & R-4 is a minimum of 10" tread and 7%" maximum rise. All other Use Group minimum 11" tread, 7" maximum rise. (Section 1014.0) 				
 14. The minimum headroom in all parts of a stairway shall not be less than 80 inches. (6'8") 1014.4 15. The Minimum required width of a corridor shall be determined by the most restrictive of the criteria under section 1011.3 but not less then 36". 16. Every sleeping room below the fourth story in buildings of Use Groups R and I-1 shall have at least one operable window or exterior door approved for emergency egress or rescue. The units must be operable from the inside without the use of special knowledge or separate tools. Where windows are provided as means of egress or rescue they shall have a sill height not more than 44 inches (1118mm) above the floor. All egress or rescue windows hern sleeping rooms chall have a not been provided by the most rescue windows hern sleeping rooms chall have a sill height of a spring bright dimension of 24 inches (610mm). The minimum 				
 net clear opening width dimension shall be 20 inches (508)mm, and a minimum net clear opening of 5.7 sq. ft. (Section 1010.4) 17. Each apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable when it exits directly from the apartment to the building exterior with no communications to other apartment units. (Section 1010.1) 18. All vertical openings shall be enclosed with construction having a fire rating of at least one (1) hour, including fire doors with self closure's. (Over 3 stories in height requirements for fire rating is two (2) hours. (Section 710.0) 19. The boiler shall be protected by enclosing with (1) hour fire rated construction including fire doors and ceiling, or by providing automatic 				
extinguishment. (Table 302.1.1)				

<u> Setter - Landre</u> La

나는 제품 시험을 위해

--

.

£20.	All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the City's Building Code Chapter 9. Section 920.3.2 (BOCA Metional Building Code (1993) and shall be installed in accordance with the provisions of the City's
•	Building Code Chapter 9, Section 920.3.2 (BOCA National Building Code/1999), and NFPA 101 Chapter 18 & 19. (Smoke detectors shall be installed and maintained at the following locations):
	• In the immediate vicinity of bedrooms
	• In all bedrooms
	 In each story within a dwelling nult, including basements
21.	A portable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved agency and be of an approved type.
	(Section 921.0)
22.	The Fire Alarm System shall be installed and maintained to NFPA #72 Standard. The Sprinkler System shall be installed and maintained to NFPA #13 Standard.
24.	All exit signs, lights and means of egress lighting shall be done in accordance with Chapter 10 Section & Subsections 1023.0 & 1024.0 of the
	City's Building Code. (The BUCA National Building Code/1999)
25.	Section 25 - 135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a certain to excavate or open any
	street of sidewalk from the time of November 15 of each year to April 15 of the following year"
20.	The builder of a facility to which Section 4594-C of the Maine State Human Rights Act Title 5 MRSA refers, shall obtain a certification from a design professional that the plans commencing construction of the facility, the builder shall submit the certification the Division of Inspection
	Services.
27.	Ventilation and access shall meet the requirements of Chapter 12 Sections 1210.0 and 1211.0 of the City's Building Code. (Crawl spaces &
	attics).
28.	All electrical, plumbing and HVAC permits must be obtained by Master Licensed holders of their trade. No closing in of walls gotti all
29	electrical (min. 72 hours notice) and plambing inspections have been done. All requirements must be met before a final Certificate of Occupancy is issued.
	All building elements shall meet the fastening schedule as per Table 2305.2 of the City's Building Code (The BOCA National Building
	Code/1996).
31.	Ventilation of spaces within a building shall be done in accordance with the City's Mechanical code (The BOCA National Mechanical
7.)	Code/1993). (Chapter M.16) There shall be No marchese in The Etist
	Please read and implement the attached Land Use Zoning report requirements. for for the first and implement the attached Land Use Zoning report requirements. for the first and the city's Building Code.
34.	string the latting shares a contain a bold mite with occurs a source, zoos,
	Bridging shall comply with Section 2305.16.
35.	Bridging shall comply with Section 2305.16. Glass and glazing shall meet the requirements of Chapter 24 of the building code. (Safety Glazing Section 2406.0)
35. 1 36. 1	Glass and glazing shall meet the requirements of Chapter 24 of the building code. (Safety Glazing Section 2406.0) All flashing shall comply with Section 1406.3.10.
35. 36. 37.	Glass and glazing shall meet the requirements of Chapter 24 of the building code. (Safety Glazing Section 2406.0) All flashing shall comply with Section 1406.3.10. All signage shall be done in accordance with Section 3102.0 signs of the City's Building Code, (The BOCA National Building Code/1999).
35. 36. 37. 38,	Glass and glazing shall meet the requirements of Chapter 24 of the building code. (Safety Glazing Section 2406.0) All flashing shall comply with Section 1406.3.10. All signage shall be done in accordance with Section 3102.0 signs of the City's Building Code, (The BOCA National Building Code/1999). All 5 met Frens (324"0, Max Spen 10-0", LF metters, exceed T4.5 0
35. 36. 37. 38,	Glass and glazing shall meet the requirements of Chapter 24 of the building code. (Safety Glazing Section 2406.0) All flashing shall comply with Section 1406.3.10. All signage shall be done in accordance with Section 3102.0 signs of the City's Building Code, (The BOCA National Building Code/1999).
35. 36. 37. 35,	Glass and glazing shall meet the requirements of Chapter 24 of the building code. (Safety Glazing Section 2406.0) All flashing shall comply with Section 1406.3.10. All signage shall be done in accordance with Section 3102.0 signs of the City's Building Code, (The BOCA National Building Code/1999). QX 5 met Flems
35. 36. 37. 35,	Glass and glazing shall meet the requirements of Chapter 24 of the building code. (Safety Glazing Section 2406.0) All flashing shall comply with Section 1406.3.10. All signage shall be done in accordance with Section 3102.0 signs of the City's Building Code, (The BOCA National Building Code/1999). QX 5 Mathematical Field of the City's Building Code, (The BOCA National Building Code/1999).
35. 36. 37. 38,	Glass and glazing shall meet the requirements of Chapter 24 of the building code. (Safety Glazing Section 2406.0) All flashing shall comply with Section 1406.3.10. All signage shall be done in accordance with Section 3102.0 signs of the City's Building Code, (The BOCA National Building Code/1999). QX 5 Part Flens
35. 36. 37. 35,	Glass and glazing shall meet the requirements of Chapter 24 of the building code. (Safety Glazing Section 2406.0) All flashing shall comply with Section 1406.3.10. All signage shall be done in accordance with Section 3102.0 signs of the City's Building Code, (The BOCA National Building Code/1999). QX 5 Mathematical Field of the City's Building Code, (The BOCA National Building Code/1999).
35. 36. 37. 35,	Glass and glazing shall meet the requirements of Chapter 24 of the building code. (Safety Glazing Section 2406.0) All flashing shall comply with Section 1406.3.10. All signage shall be done in accordance with Section 3102.0 signs of the City's Building Code, (The BOCA National Building Code/1999). QX 5 Part Flens
35. 36. 37. 35.	Glass and glazing shall meet the requirements of Chapter 24 of the building code. (Safety Glazing Section 2406.0) All flashing shall comply with Section 1406.3.10. All signage shall be done in accordance with Section 3102.0 signs of the City's Building Code, (The BOCA National Building Code/1999). $2 \times 3' m + Te - 5' (3 - 24" O C) max 3 per 10' - 0'' AF metters exceed 14.5 a Ngw p / a 0 - 5hell be - 5id bmi Mtd. For Appreval.$
35. 36. 37. 35.	Glass and glazing shall meet the requirements of Chapter 24 of the building code. (Safety Glazing Section 2406.0) All flashing shall comply with Section 1406.3.10. All signage shall be done in accordance with Section 3102.0 signs of the Cjty's Building Code, (The BOCA National Building Code/1999). <u>AX 5 rufTers</u> <u>0 24"0C</u> <u>max</u> <u>Spgn</u> 10-0". <u>AF refters</u> <u>excess</u> <u>14.5</u> <u>0</u> <u>vew</u> <u>pkan</u> <u>Shall</u> <u>be</u> <u>Stabm</u> . <u>Med</u> <u>Spgn</u> 10-0". <u>AF refters</u> <u>excess</u> <u>14.5</u> <u>0</u> <u>vew</u> <u>pkan</u> <u>Shall</u> <u>be</u> <u>Stabm</u> . <u>Med</u> <u>Spgn</u> <u>10-0</u> ". <u>AF</u> <u>refters</u> <u>excess</u> <u>14.5</u> <u>0</u> <u>vew</u> <u>pkan</u> <u>Shall</u> <u>be</u> <u>Stabm</u> . <u>Med</u> <u>Spgn</u> <u>10-0</u> ". <u>AF</u> <u>refters</u> <u>excess</u> <u>14.5</u> <u>0</u> <u>vew</u> <u>pkan</u> <u>Shall</u> <u>be</u> <u>Stabm</u> . <u>Med</u> <u>Spgn</u> <u>10-0</u> <u>0</u> <u>100</u>
35. 36. 37. 35.	Glass and glazing shall meet the requirements of Chapter 24 of the building code. (Safety Glazing Section 2406.0) All flashing shall comply with Section 1406.3.10. All signage shall be done in accordance with Section 3102.0 signs of the City's Building Code, (The BOCA National Building Code/1999). <u>AX 8 meffers</u> <u>0.24"0C</u> , <u>max</u> <u>span 10-0"</u> , <u>LF meffers</u> <u>excess of T4.5</u> <u>0</u> <u>Y2W plan Staff be 5a bmilled for as preveic</u> <u>Name plan Staff be 5a bmilled</u> <u>Name plan Staff be 5a bmilled</u> <u>Staff be 5a bmilled</u> <u>Staf</u>
35. 36. 37. 35. 	Glass and glazing shall meet the requirements of Chapter 24 of the building code. (Safety Glazing Section 2406.0) All flashing shall comply with Section 1406.3.10. All signage shall be done in accordance with Section 3102.0 signs of the Cjty's Building Code, (The BOCA National Building Code/1999). 2×5 $rufTers$ (224"OC, MAX SPG 10-0", LF refters exceed T4.5 C VOW plan Shall be Sid britted for appreced. NOW plan Shall be Sid britted for appreced. How Plan Shall inspector DK McDougall, PFD
35. 36. 37. 35. 35. 	Glass and glazing shall meet the requirements of Chapter 24 of the building code. (Safety Glazing Section 2406.0) All flashing shall comply with Section 1406.3.10. All signage shall be done in accordance with Section 3102.0 signs of the City's Building Code, (The BOCA National Building Code/1999). <u>AX 8 reffers</u> <u>6 24"05</u> , <u>Max Spgn 10-0</u> , <u>LF reffers</u> <u>excess 174.5</u> <u>a</u> <u>New plan Shall</u> be <u>5a ban</u> <u>Net for <u>6</u> press (<u>14.5</u>) <u>be 5a ban</u> <u>Net for <u>6</u> press (<u>14.5</u>) <u>a</u> <u>New plan Shall</u> be <u>5a ban</u> <u>Net for <u>6</u> press (<u>15.5</u>) <u>be 5a ban</u> <u>Net for <u>6</u> press (</u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u>
35. 36. 37. 35. 35. 35. 10. 10. PSH 10. PSH 10.	Glass and glazing shall meet the requirements of Chapter 24 of the building code. (Safety Glazing Section 2406.0) All flashing shall comply with Section 1406.3.10. All signage shall be done in accordance with Section 3102.0 signs of the City's Building Code, (The BOCA National Building Code/1999). <u>2X5 matters</u> <u>24"OC</u> , <u>max</u> <u>Span 10-0</u> , <u>IF matters</u> <u>excessed 14.5</u> <u>A</u> <u>waw</u> <u>plan</u> <u>Shall</u> <u>be</u> <u>Submitted</u> <u>for <u>approved</u></u> <u>waw</u> <u>plan</u> <u>Shall</u> <u>be</u> <u>Submitted</u> <u>for <u>approved</u></u> <u>matters</u> , Building Inspector IK McDougall, PFD Marge Schmuckal, Zoning Administrator Michael Nugent, Inspection Service Manager
35. 36. 37. 35. 35. 35. 35. 	Glass and glazing shall meet the requirements of Chapter 24 of the building code. (Safety Glazing Section 2406.0) All flashing shall comply with Section 1406.3.10. All signage shall be done in accordance with Section 3102.0 signs of the City's Building Code, (The BOCA National Building Code/1999). <u>QX 8 rafters</u> <u>O 24"0C</u> , <u>Max Spgn 10-0"</u> <u>IF refters</u> <u>exceed 14.5</u> <u>O</u> <u>Wew pkan Shall</u> <u>be Submitted for <u>Apprevel</u>. May pkan Shall be comply be the sector <u>Apprevel</u>. May Building Inspector <u>DKMcDougall</u>, PFD Marge Schmuckal, Zoning Administrator Michael Nugent, Inspection Service Manager</u>
35. 36. 37. 35. 35. 35. 35. 10. 10. 10. 10. 10. 10. 10. 10	Glass and glazing shall meet the requirements of Chapter 24 of the building code. (Safety Glazing Section 2406.0) All flashing shall comply with Section 1406.3.10. All signage shall be done in accordance with Section 3102.0 signs of the City's Building Code, (The BOCA National Building Code/1999). <u>AX 8 rufTers</u> <u>Gay"OC</u> <u>max</u> <u>Span 10-0</u> <u>LF</u> refress <u>exceed 14.5</u> <u>A</u> <u>refress</u> <u>refress</u> <u>exceed 14.5</u> <u>A</u> <u>refress</u> <u>refress</u> <u>exceed 14.5</u> <u>A</u> <u>refress</u> <u>exceed 14.5</u> <u>A</u> <u>refress</u> <u>refress</u> <u>exceed 14.5</u> <u>A</u> <u>refress</u> <u>refress</u> <u>exceed 14.5</u> <u>A</u> <u>refress</u> <u>refress</u> <u>exceed 14.5</u> <u>A</u> <u>refress</u> <u>exceed 14.5</u> <u>A</u> <u>refress</u> <u>refress</u> <u>exceed 14.5</u> <u>A</u> <u>refress</u> <u>refress</u> <u>exceed 14.5</u> <u>A</u> <u>refress</u> <u>refress</u> <u>refress</u> <u>refress</u> <u>exceed 14.5</u> <u>A</u> <u>refress</u> <u>refress</u> <u>exceed 14.5</u> <u>A</u> <u>refress</u> <u>refress</u> <u>refress</u> <u>exceed 14.5</u> <u>A</u> <u>refress</u> <u>refress</u> <u>refress</u> <u>refress</u> <u>exceed 14.5</u> <u>A</u> <u>refress</u> <u>refress</u> <u>refr</u>
35. 36. 37. 35. 35. 35. 35. 77. 35. 77. 35. 77. 35. 77. 35. 77. 77. 77. 77. 77. 77. 77. 7	Glass and glazing shall meet the requirements of Chapter 24 of the building code. (Safety Glazing Section 2406.0) All flashing shall comply with Section 1406.3.10. All signage shall be done in accordance with Section 3102.0 signs of the City's Building Code, (The BOCA National Building Code/1999). A b metre of 24"OC, max Span 10-0% LF hefters exceed 17.5 C New plant Span be Statiment of the city's Building Code, (The BOCA National Building Code/1999). A b metre of 24"OC, max Span 10-0% LF hefters exceed 17.5 C New plant Span be Statiment of the city's Building Code, (The BOCA National Building Code/1999). May plant Span be Statiment of the city's Building Code, (The BOCA National Building Code/1999). May plant Span be Statiment of the city of the city's Building Code, (The BOCA National Building Code/1999). May plant Span be statiment of the city of
35. 36. 37. 35. 35. 35. 35. 35. 57. 35. 57. 35. 57. 35. 57. 35. 57. 35. 57. 57. 57. 57. 57. 57. 57. 5	Glass and glazing shall meet the requirements of Chapter 24 of the building code. (Safety Glazing Section 2406.0) All flashing shall ocomply with Section 1406.3.10. All signage shall be done in accordance with Section 3102.0 signs of the City's Building Code, (The BOCA National Building Code/1999). A & metters @ 24"O.C. mex Spg 1 10-0". If hofters excess of 14.5 0 Wew plan Shall be constructed by the state of the section 3102.0 signs of the City's Building Code, (The BOCA National Building Code/1999). Wew plan Shall be constructed by the section 1102.0 signs of the City's Building Code, (The BOCA National Building Code/1999). Wew plan Shall be constructed by the section 1102.0 signs of the City's Building Code, (The BOCA National Building Code/1999). Wew plan Shall be constructed by the section 1102.0 signs of the City's Building Code, (The BOCA National Building Code/1999). Wew plan Shall be constructed by the section 1102.0 signs of the city's Building Code, (The BOCA National Building Code/1999). Wew plan Shall be constructed by the section 1102.0 signs of the city's Building Code, (The BOCA National Building Code/1999). Wew plan Shall be constructed by the section 1102.0 signs of the city's Building Code, (The BOCA National Building Code/1999). Wey plan Shall be constructed by the section 1102.0 signs of the section 1102.0 shall the section 1102.0 shall be constructed as coadinons placed on these plans, any deviations shall require a separate approval. HIS PERMIT HAS BEEN ISSUED WITH THE UNDERSTANDING THAT ALL THE IDITIONS OF THE APPROVAL SHALL BE COMPLETED. THEREFORE, BEFORE THE
35. 36. 37. 35. 35. 35. 35. 77. 35. 77. 35. 77. 35. 77. 77. 77. 77. 77. 77. 77. 7	Glass and glazing shall meet the requirements of Chapter 24 of the building code. (Safety Glazing Section 2406.0) All flashing shall comply with Section 1406.3.10. All signage shall be done in accordance with Section 3102.0 signs of the City's Building Code, (The BOCA National Building Code/1999). A b refiers Cay Code State and Code and Cod
35. 36. 37. 35. 35. 35. 35. 35. 35. 35. 35	Glass and glazing shall meet the requirements of Chapter 24 of the building code. (Safety Glazing Section 2406.0) All flashing shall be done in accordance with Section 3102.0 signs of the City's Building Code, (The BOCA National Building Code/1999). All signage shall be done in accordance with Section 3102.0 signs of the City's Building Code, (The BOCA National Building Code/1999). All 5 meffers. Code of 14.5 Code
35. 36. 37. 35. 35. 35. 35. 35. 35. 35. 35	Glass and glazing shall meet the requirements of Chapter 24 of the building code. (Safety Glazing Section 2406.0) All flashing shall comply with Section 1406.3.10. All signage shall be done in accordance with Section 3102.0 signs of the City's Building Code, (The BOCA National Building Code/1999). A b refiers Cay Code State and Code and Cod
35. 36. 37. 35. 35. 35. 35. 10. 10. 10. 10. 10. 10. 10. 10	Glass and glazing shall meet the requirements of Chapter 24 of the building code. (Safety Glazing Section 2406.0) All flashing shall be done in accordance with Section 3102.0 signs of the City's Building Code, (The BOCA National Building Code/1999). All signage shall be done in accordance with Section 3102.0 signs of the City's Building Code, (The BOCA National Building Code/1999). All Staffers. Code of The Section 3102.0 signs of the City's Building Code, (The BOCA National Building Code/1999). All Staffers. Code of The Section 3102.0 signs of the City's Building Code, (The BOCA National Building Code/1999). All Staffers. Code of The Section 3102.0 signs of the City's Building Code, (The BOCA National Building Code/1999). All Staffers. Building Inspector Define Schuckal, Zoning Administrator Michael Nugent, Inspection Service Manager
35. 36. 37. 35. 35. 35. 35. 35. 35. 10. 10. 10. 10. 10. 10. 10. 10	Glass and glazing shall meet the requirements of Chapter 24 of the building code. (Safety Glazing Section 2406.0) All flashing shall comply with Section 1406.3.10. All signage shall be done in accordance with Section 3102.0 signs of the City's Building Code, (The BOCA National Building Code/1999). All b ruffers G 24"0C, max Span 10-0°, LF be Freese C. Yew plan 0 Shall be done in accordance with Section 3102.0 signs of the City's Building Code, (The BOCA National Building Code/1999). All be state of the section of the content of the con
35. 36. 36. 37. 35. 35. 35. 10. 10. 10. 10. 10. 10. 10. 10	Glass and glazing shall meet the requirements of Chapter 24 of the building code. (Safety Glazing Section 2406.0) All flashing shall comply with Section 1406.3.10. All signage shall be done in accordance with Section 3102.0 signs of the Cjty's Building Code, (The BOCA National Building Code/1999). AA b metfense @ 24" O.C. max span 10 - D - 25 proceed 775.5 C New plan Shall be done with Section 3102.0 signs of the Cjty's Building Code, (The BOCA National Building Code/1999). A b metfense @ 24" O.C. max span 10 - D - 25 proceed (New plan Shall be done with Section 3102.0 signs of the Cjty's Building Code, (The BOCA National Building Code/1999). A b metfense, Building Inspector Drage Schmuckal, Zoning Administrator Michael Nugent, Inspection Service Manager permit is herewith issued, on the basis of plaus submitted and coadifions placed on these plans, any deviations shall require a separate approval. HIS PERMIT HAS BEEN ISSUED WITH THE UNDERSTANDING THAT ALL THE KDITIONS OF THE APPROVAL SHALL BE COMPLETED. THEREFORE, BEFORE THE RK IS COMPLETED A REVISED PLAN OR STATEMENT FROM THE PERMIT HOLDER LL BE SUBMITTED TO THIS OFFICE SHOWING OR EXPLAINING THAT THE IDITIONS HAVE BEEN MET. IF THIS REQUIREMENT IS NOT RECEIVED YOUR TIFICATE OF OCCUPANCY SHALL BE WITHHELD. (You Shall Call for Inspections)
35. 36. 37. 35. 35. 35. 35. 35. 35. 35. 35	Class and glazing shall meet the requirements of Chapter 24 of the building code. (Safety Glazing Section 2406.0) All flashing shall comply with Section 1406.3.10. All signage shall be done in accordance with Section 3102.0 signs of the City's Building Code, (The BOCA National Building Code/1999). BAS metfers Gard Code State
35. 36. 37. 35. 37. 35. 35. 35. 35. 35. 35. 35. 35	Glass and glazing shall meet the requirements of Chapter 24 of the building code. (Safety Glazing Section 2406.0) All flashing shall comply with Section 1406.3.10. All signage shall be done in accordance with Section 3102.0 signs of the City's Building Code, (The BOCA National Building Code/1999). AA b metters @ 24"OC. MAX_Spen 10-0 a DE metters? exceed 74.5 a New plan Shall be done with Section 3102.0 signs of the City's Building Code, (The BOCA National Building Code/1999). AA b metters? @ 24"OC. MAX_Spen 10-0 a DE metters? exceed 74.5 a New plan Shall be done with Section 3102.0 signs of the City's Building Code, (The BOCA National Building Code/1999). AA b metters? Building Inspector Definition of the section of the sec

*****CERTIFICATE OF OCCUPANCY FEE \$50.00

a second and a second a second

010590

THIS IS NOT A PERMIT/CONSTRUCTION CANNOT COMMENCE UNTIL THE PERMIT IS ISSUED

-

V

All Purpose Building Permit Application

If you or the property owner owes real estate or personal property taxes or user charges on any property within the City, payment arrangements must be made before permits of any kind are accepted.

Location/Address of Construction:	S Veteran.				
Total Square Footage of Proposed Structure	Square Footage of Lot	15,00 SF			
Tax Assessor's Chart, Block & Lot Numher Chart# DOS Block# (Lot# Od	Owner: June Bostallis SAppliton St # 3D Boston, NA OCIIL	Теlephone#: 5др-805-18В			
Lessee/Buyer's Name (If Applicable) Owner's/Purchaser/Lessee Address: Cost Of Work: 10, DOFee: \$ 100					
Current use: SINJU FAMILY Scasonal					
If the location is currently vacant, what was prior use: Approximately how long has it been vacant:					
Proposed use: SINK FAMILY SCASONal					
Project description: VEMONE e VEPLULE NOOF / VEPLULE BOTH NOTHER delles as nuraed (NOOFEd ducks)					
Contractor's Name, Address & Telephone: SLIF Fild CAMSON					
Applicants Name, Address & Telephone:					
Who should we contact when the permit is ready: MAL					
I relephone: If you would like the permit mailed, what mailing address should we use: If Prince AVE Prats TS Imal Rec'd By: 5/23					
L		4104			

THIS IS NOT A PERMIT/CONSTRUCTION CANNOT COMMENCE UNTIL THE PERMIT IS ISSUED

PLOT PLAN INCLUDES THE FOLLOWING:

- The shape and dimension of the lot, all existing buildings (if any), the proposed structure and the distance from the actual property lines. Structures include decks porches; a bow windows cantilever sections and roof overhangs, as well as, sheds, pools, garages and any other accessory structures.
- Scale and North arrow; Zoning District & Setbacks
- First Floor sill elevation (based on mean sea level datum);
- Location and dimensions of parking areas and driveways;
- Location and size of both existing utilities in the street and the proposed utilities serving the building;
- Location of areas on the site that will be used to dispose of surface water.
- Existing and proposed grade contours

A COMPLETE SET OF CONSTRUCTION DRAWINGS INCLUDES THE FOLLOWING:

- Cross Sections w/Framing details (including porches, decks w/ railings, and accessory structures)
- Floor Plans & Elevations
- Window and door schedules
- Foundation plans with required drainage and damp proofing

Electrical and plumbing layout. Mechanical drawings for any specialized equipment such as furnaces, chimneys, gas equipment, HVAC equipment (air handling) or other types of work that may require special review must be included.

SEPARATE PERMITS ARE REQUIRED FOR INTERNAL & EXTERNAL PLUMBING, HVAC AND ELECTRICAL INSTALLATIONS


- All construction must be conducted in compliance with the 1999 B.O.C.A. Building Code as amended by Section 6-Art II.
- All plumbing must be conducted in compliance with the State of Maine Plumbing Code.
- All Electrical Installation must comply with the 1999 National Electrical Code as amended by Section 6-Art III.
- HVAC (Heating, Ventilation and Air Conditioning) installation must comply with the 1993 BOCA Mechanical Code.


Minor/Minor Site Review Fee for New Single Family homes: \$300.00/Building Permit Fee: \$30.00 for the 1st \$1000.cost plus \$6.00 per \$1,000.00 construction cost thereafter.

ONE SET OF SUBMISSIONS INCLUDING CONSTRUCTION AND SITE PLAN DRAWINGS MUST BE SUBMITTED ON PAPER NO LARGER THAN 11" x 17" BEFORE ANY BUILDING PERMIT WILL BE ISSUED Certification

I hereby certify that I am the Owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been authorized by the owner to make this application as his/her authorized agent. I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in this application is issued, I certify that the Code Official's authorized representative shall have the authority to enter all areas covered by this permit at any reasonable hour to enforce the provisions of the codes applicable to this permit.

·		
Signature of applicant:	The aslow	Date: $\leq \sqrt{2} \leq \sqrt{2}$
	MA andor	
······································		

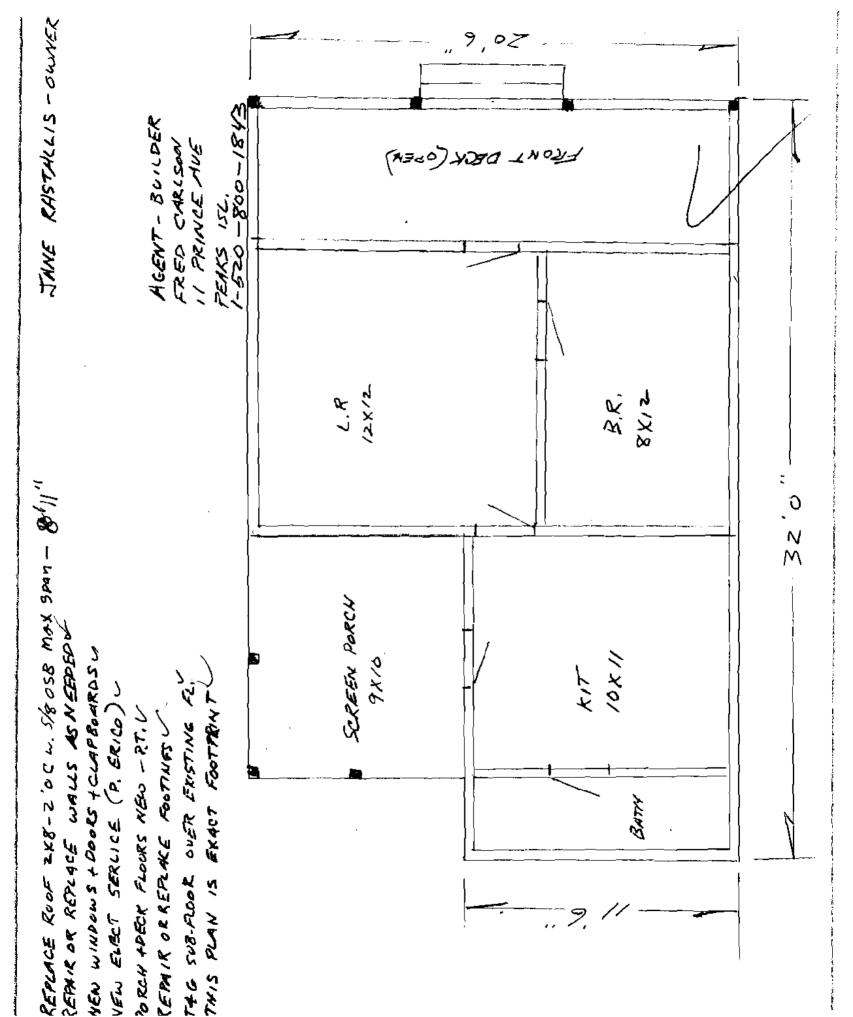

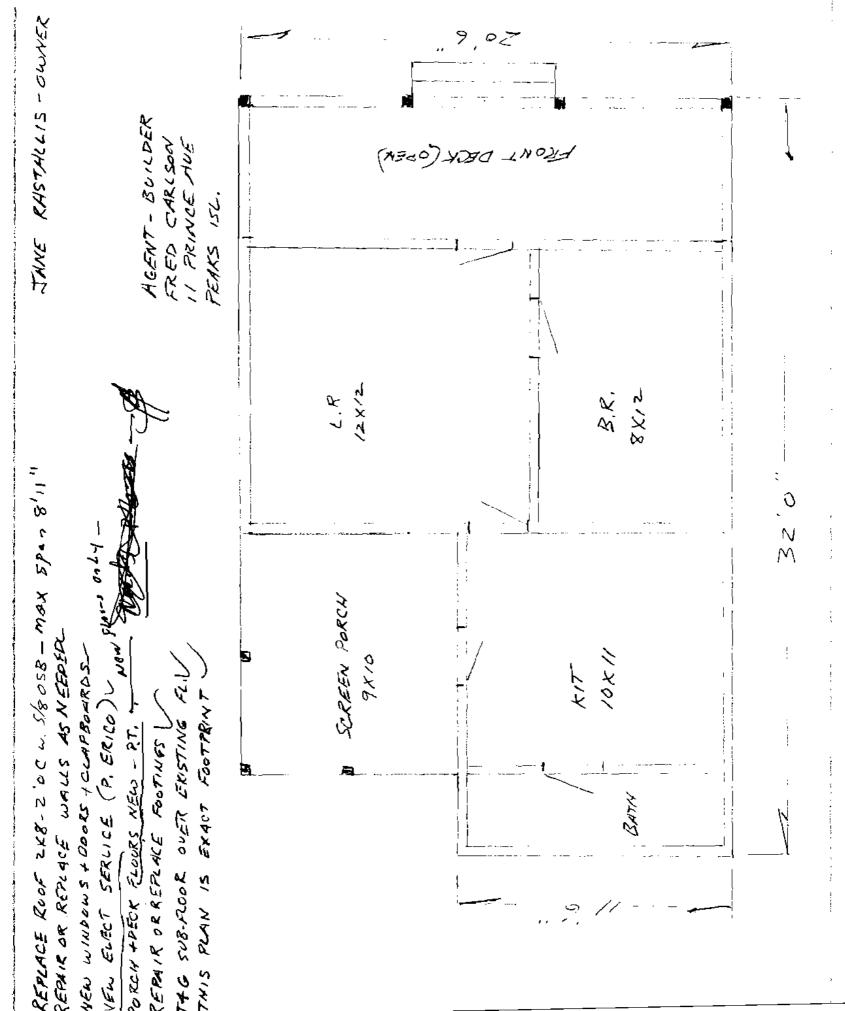

b Ŧ ranted the ceipt less \$5.00 or 10% whichever is greater. 1- 310 granted. K - Auditors Copy LOW - Office Copy n the pre **MULINU** UNS-6-001 hed from Š 500000 **Ipplicant's Copy** amount of the fee will be refunded upon return of PRESERVE THIS RECEIPT. In case permit canno and marty LE DAW . Acceptance of the is no guarantee that per tibe started until PERMIT CAPD is actually hind (a inson PORTLAND, of Building Inc S S S 001/ Est. Cost 5 Dollars 3 E 5 D.