



Project: _____
Fixture Type: _____
Location: _____
Contact: _____

P563000 3IN Wall Mount Downlight Cylinder

Wall mounted • Wet location listed



Description:

Sleek, cylindrical forms in elegant finish selections. Die-cast aluminum wall brackets and heavy-duty aluminum framing. Fade and chip-resistant. UL listed for wet locations. Can be used indoor or outdoor. Ideal for residential and commercial applications.

Specifications:

- Graphite (-143) (Painted)
- Aluminum construction Clear
- 3" LED wall mount downlight cylinder
- This sleek, contemporary cylinder is ideal for indoor or outdoor applications
- A Graphite finish complements a variety of exteriors
- Warm white, 3000K, color temperature, 90 CRI
- 919 lumens, 77 lumens per watt
- Die Cast Aluminum construction with durable powder coated finish
- Dimmable to 10% brightness with many Forward Phase (Triac) dimmers
- covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- 6" of wire supplied
- ENERGY STAR® qualified
- Meets California Title 24 JA8-2016

Performance:

Number of Modules	1
Input Power	12w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW	907/75 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	50,000 (L70/TM-21)
EMI/RFI	FCC Title 47, Part 15 Class B
Min. Start Temp	-10 °C
Max. Operating Temp	40 °C
Warranty	5 year warranty
Labels	CSA Wet location listed ENERGY STAR® qualified Meets California Title 24 JA8-2016

P563000-143-30K

Images:



Dimensions:

Width: 4-1/2"
Depth: 5-1/2"
Height: 5-5/8"
H/CTR: 3"



Project: _____
 Fixture Type: _____
 Location: _____
 Contact: _____

P6341 Flood Light With Motion

Wall mounted • Wet location listed **PROGRESS LED**

Description:

The two-light Security light with motion sensor is ideal for residential and commercial applications. Each tempered glass head has over 1,000 lumens and is adjustable. The motion sensor has 180 degree coverage, center focus range to 72 feet, Time On, Sensitivity and Distance adjustment with Night/Day or night operation. This fixture saves energy and maintenance over traditional lighting sources.

Specifications:


- Antique Bronze (-20) (Powder Coat Paint)
- Die-cast aluminum construction
- Tempered glass lens
- Two adjustable heads
- 180 degree motion sensor.
- 2104 lumens, 79 lumens/watt.
- Time On, Sensitivity and Distance adjustment.
- Backplate covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- 6" of wire supplied

Performance:

Number of Modules	2
Input Power	26.6w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW	2104/79 (LM-79) per module
CCT	3000 K
CRI	83
Life (hours)	60,000 (L70/TM-21)
EMI/RFI	FCC Title 47, Part 15 Class B
Min. Start Temp	-20 °C
Max. Operating Temp	40 °C
Warranty	5 year warranty
Labels	cCSAus Wet location listed

P6341-2030K

Images:

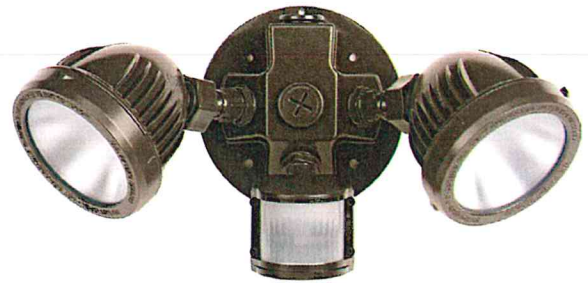

Dimensions:

- (A) Width: 12-3/4"
 (C) Depth: 5"
 (B) Height: 6-1/2"

