


**NOTES:**

- 1.) ROT AND RUST RESISTANCE:
  - A. ALL WOOD FRAMING MEMBERS THAT REST ON CONCRETE OR MASONRY EXTERIOR WALLS SHALL BE OF A ROT RESISTANT MATERIAL
  - B. ALL WOOD JOISTS OR THE BOTTOM OF A WOOD STRUCTURAL FLOOR WHEN CLOSER THAN 18", OR WOOD GIRDERS WHEN CLOSER THAN 12", TO THE EXPOSED GROUND, SHALL BE OF A ROT RESISTANT MATERIAL
  - C. NEW WOOD SIDING AND/OR SHEATHING TO BE ABOVE GRADE A MINIMUM OF 6" OR ELSE OF A ROT RESISTANT MATERIAL
  - D. ALL DECK/STAIR FRAMING/DECKING TO BE OF ROT RESISTANT WOOD
  - E. ALL EXTERIOR FASTENERS AND HARDWARE TO BE HOT-DIP GALVANIZED, SIMPSON Z-MAX (OR EQUIV), OR STAINLESS STEEL.
- 2.) DECK, PORCH, AND STAIR FOOTINGS:
  - A. REMOVE AND DISPOSE OF EXISTING ENTRANCE STAIR FOOTINGS.
  - B. NEW FOOTINGS TO BE FROST PROTECTED TO MIN. 4'-0" DEEP, ON UNDISTURBED SOIL (OR PINNED TO BEDROCK).
  - C. TYPICAL DECK/PORCH FOOTINGS: MIN. 10"x10" FOOTINGS ON ROCK (BASIC PRECAST PYRAMIDAL PIER); "PRECAST CONCRETE DELUXE FOOTING" FROM GAGNE AND SONS, WITH INTEGRAL 16"x16" FOOTING ON SOIL.
  - D. SECURE ABU66Z POST BASE TO CAST-IN-PLACE THREADED INSERT @ EACH FOOTING WITH 3/4" THREADED ROD, NUT AND WASHER.
  - E. TYPICAL NEW EXTERIOR STAIR FOOTINGS: 12" X 6" SPREAD FOOTING (F403.1), 8" MORTARED SOLID CMU FROSTWALL WITH STANDARD LADDER REINFORCEMENT FULL WIDTH OF EACH MORTAR BED. 2X8 P.T. SOLE PLATE ANCHORED TO FROSTWALL ACCORDING TO R403.1.6, (DRILL AND EPOXY SET THREADED ROD, MIN. 6" INSERTION.)
- 3.) DECK LEDGERS:
  - A. REMOVE EXISTING SIDING TO ALLOW FOR SECURE ATTACHMENT OF LEDGERS TO EXISTING HOUSE. ADHERE ICE & WATER SHIELD TO EXPOSED EXISTING SHEATHING - TUCK UNDER WRB ABOVE.
  - B. THROUGH-BOLT LEDGER TO EXISTING WOOD SILL WHERE POSSIBLE W/(2) 3/4" BOLTS (W/ NUTS & WASHERS), 16" O.C. FASTEN LEDGER TO EXISTING BRICK FOUNDATION WHERE NECESSARY, WITH (2) 6" GRK CALLIBURN SCREWS, 16" O.C. SHIM BETWEEN LEDGER AND BRICK AS NEEDED AT FASTENER LOCATIONS
  - C. PROVIDE FLASHING OVER LEDGER, TUCKED UNDER EXISTING WRB ABOVE. LEAVE 1" GAP BETWEEN FLASHING AND SIDING ABOVE.
  - D. HANG JOISTS FROM LEDGER WITH SIMPSON LUS28Z (LUC28Z @ OUTER (EAST) JOIST)
- 4.) POSTS AND BRACING
  - A. SUPPORT ALL NEW DECK/PORCH GIRDERS WITH P.T. 6X6 POSTS.
  - B. SECURE POSTS TO PIERS WITH PROVIDED ABU66Z POST BASES, PER MANUFACTURER'S SPECIFICATIONS.
  - C. DIAGONALLY BRACE EACH POST TO GIRDER ABOVE WITH 2X6 DIAGONALS, FROM LOWER 1/3 POINT OF POSTS.

FASTENER SCHEDULE	
SILL PLATE TO FOUNDATION	1/2" ANCHOR BOLT @ 36" O.C. W/ 3" PLATE WASHER; 9" MIN. EMBEDMENT
ROOF SHEATHING	8d @ 6" O.C. EDGE / 12" O.C. FIELD (TYPICAL PANELS) 8d @ 6" O.C. EDGE / 6" O.C. FIELD (PERIMETER PANELS)
WALL SHEATHING	8d @ 6" O.C. EDGE / 12" O.C. FIELD
FLOOR SHEATHING	12d RING OR SPIRAL NAILS @ 6" O.C. EDGE / 12" O.C. FIELD
POST BASES TO CONCRETE	SIMPSON TYPE ABU
POST CAPS	SIMPSON BC OR LC (MATCH POST SIZE)
JOIST ON SILL, TOP PLATE, OR GIRDER	SIMPSON LUS HANGER OR 4 - 8d (TOENAILED) WHEN JOIST BEARS ON SUPPORT
BRIDGING / BLOCKING TO JOIST	2 - 8d (TOENAILED)
BLOCKING TO SILL / TOP PLATE	3 - 16d (TOENAILED)
LEDGER STRIP TO BEAM	3 - 16d (TOENAILED, PER JOIST)
JOIST ON LEDGER TO BEAM	3 - 8d (TOENAILED)
BAND / RIM JOIST TO JOIST	3 - 16d (TOENAILED)
RIM JOIST TO SILL / TOP PLATE	2 - 16d PER FOOT
TOP PLATE TO TOP PLATE	2 - 16d PER FOOT
TOP PLATES AT INTERSECTION	4 - 16d EACH SIDE
STUD TO STUD	1 - 16d @ 12" O.C.
HEADER TO HEADER	16d @ 8" O.C. ALONG EDGES
TOP OR BOTTOM PLATE TO STUD	2 - 16d
BOTTOM PLATE TO JOIST OR BLOCKING	2 - 16d PER FOOT
RAFTER TO TOP PLATE	SIMPSON H1 HURRICANE TIE
CEILING JOIST TO TOP PLATE	2 - 8d (TOENAILED)
BLOCKING TO RAFTER	2 - 8d EACH END
BAND JOIST TO RAFTER	2 - 16d EACH END
SLOPED/SKEWED RAFTER HANGERS AT RIDGE/HIP BEAMS	SIMPSON LSU

**AREA OF SCOPE**

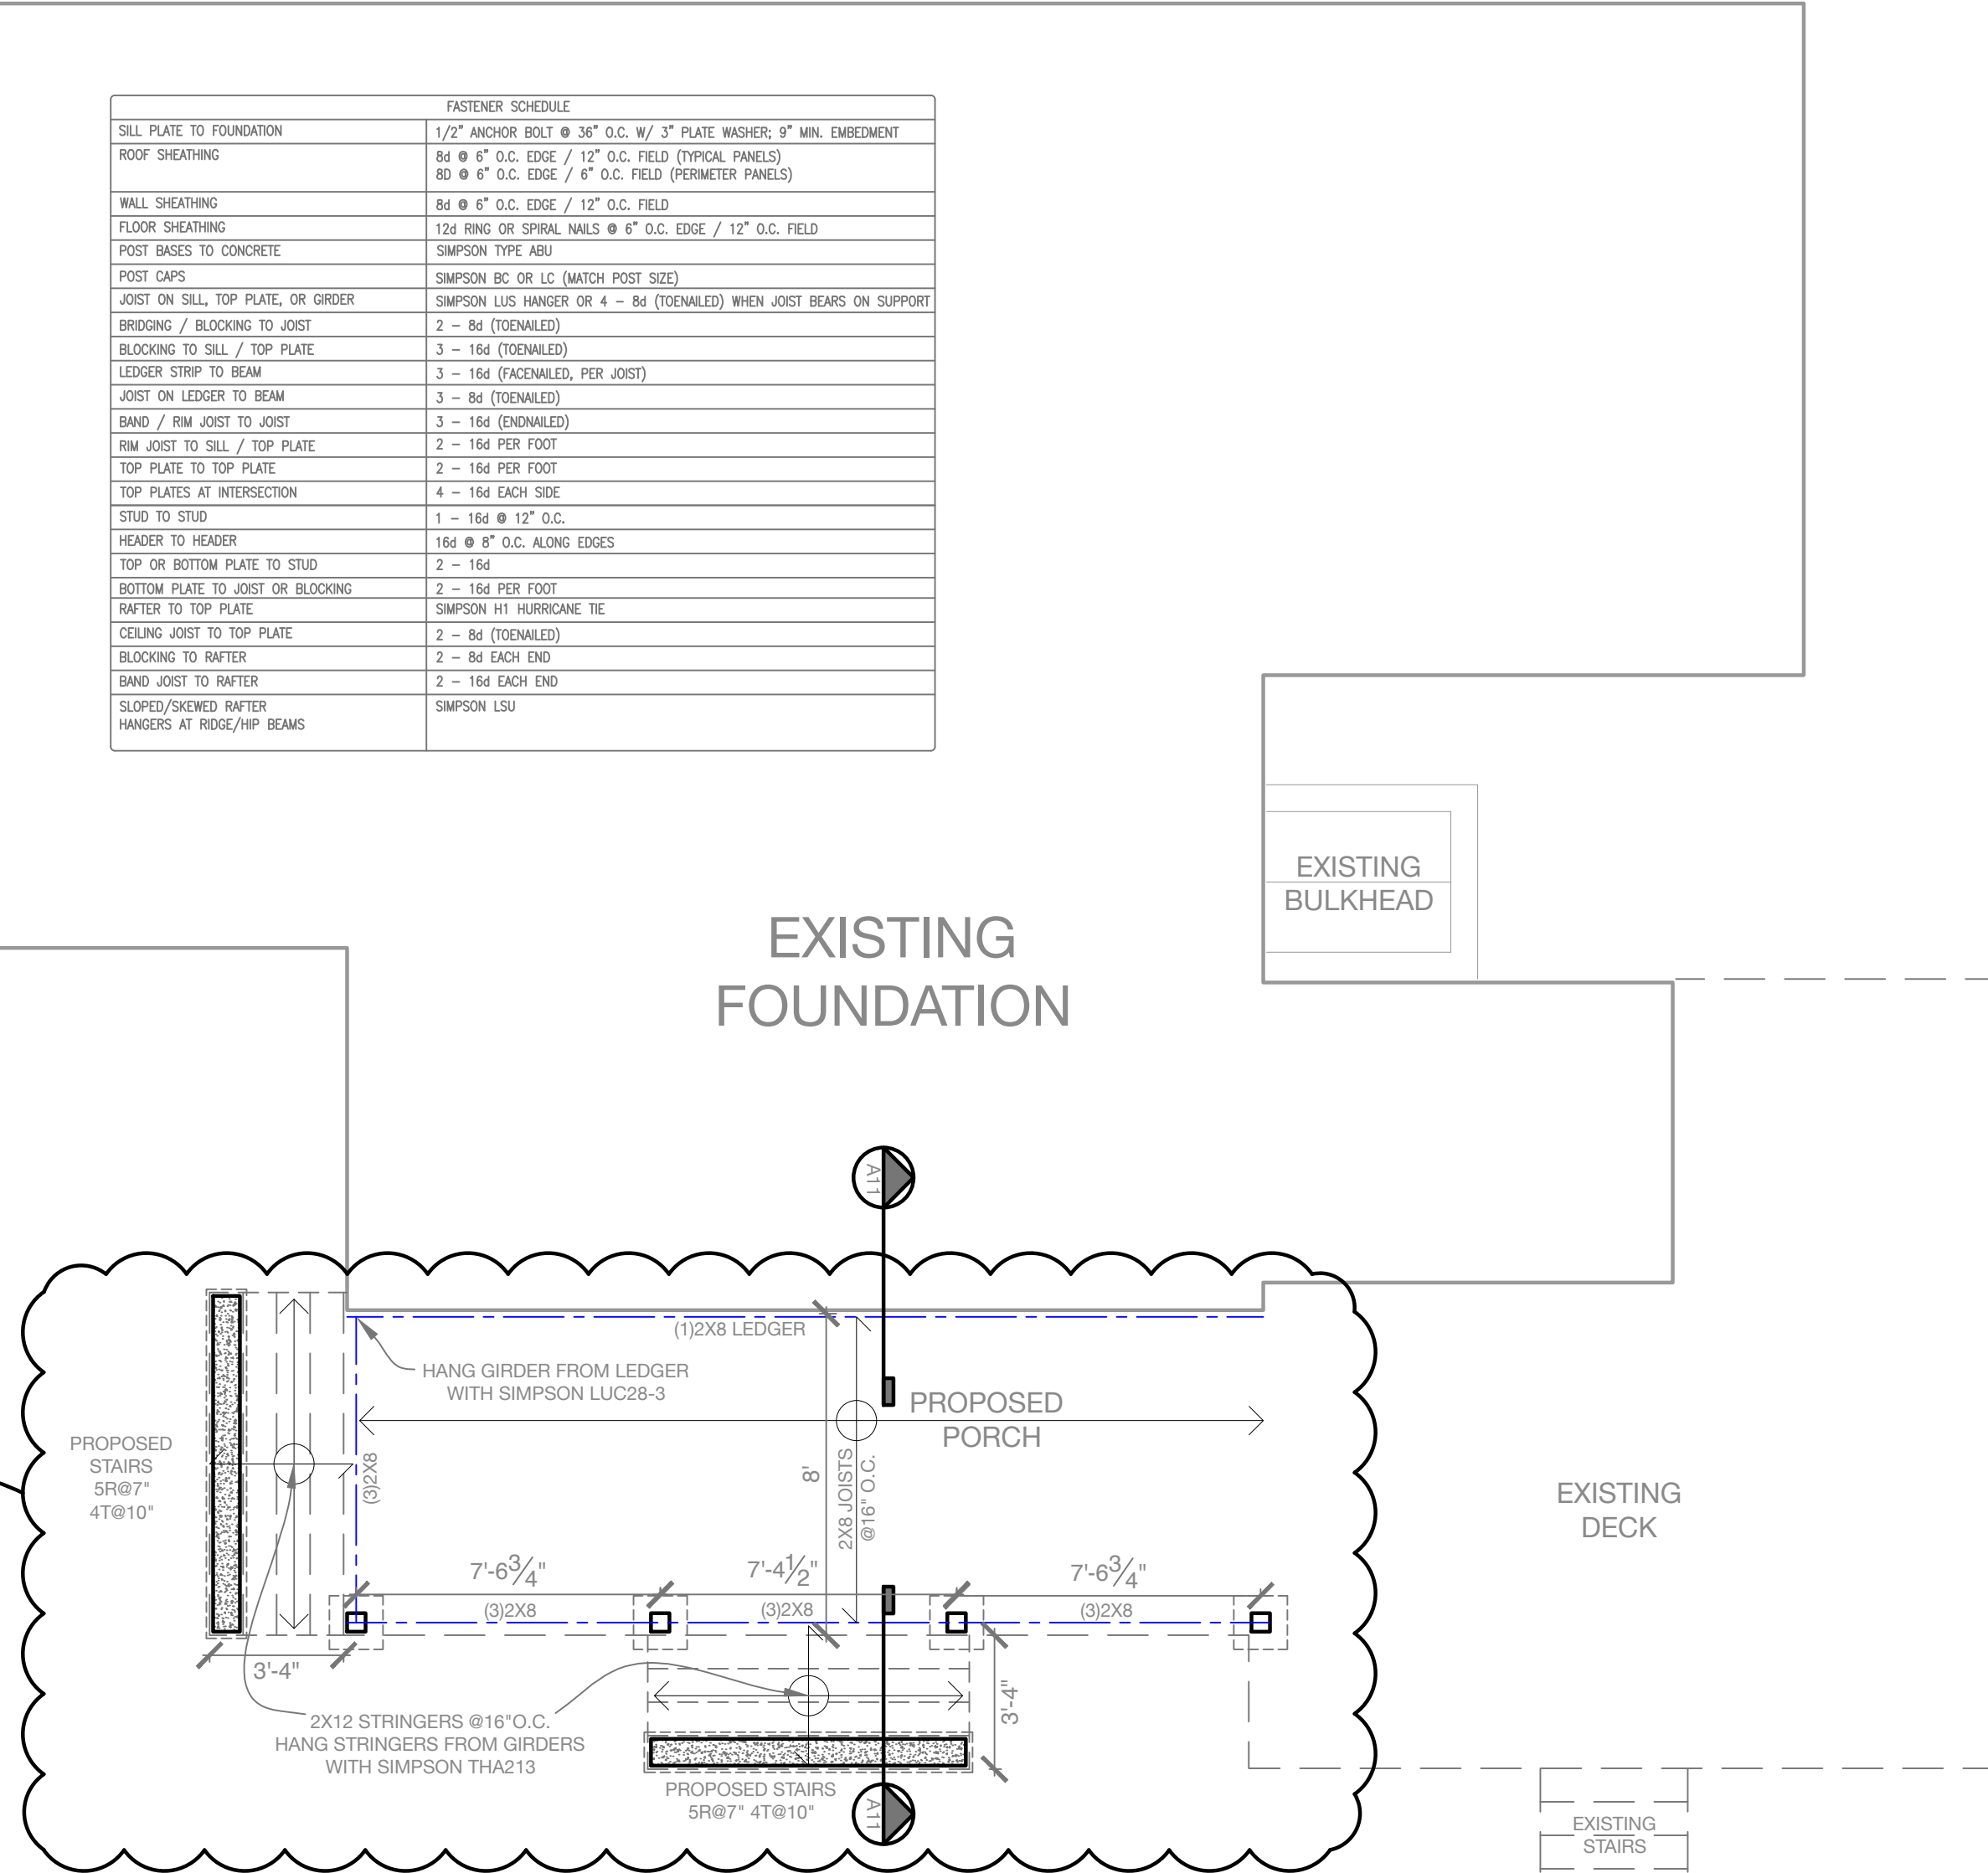

- TYPICAL DECK FOOTING SEE NOTE: 2C
- TYPICAL DECK STAIR FOOTING SEE NOTE: 2E

**Rachel Conly Design LLC**  
26 Sterling Street  
Peaks Island, Maine 04108  
207.766.5625

DATE	NOTES
2016.12.14	
REVISION	

1/4" = 1'

**PROJECT**  
**Asbjornsen**  
**107 Island Ave.**  
**Peaks Island, ME**  
**04108**

**A Proposed Foundation & Porch Framing Plan**

**S1**  
Proposed  
Found. & Porch  
Framing Plan