


Bosch Greenstar Wall Hung Combi Boiler

Engineering
Submittal
Sheet



BOSCH

Overview

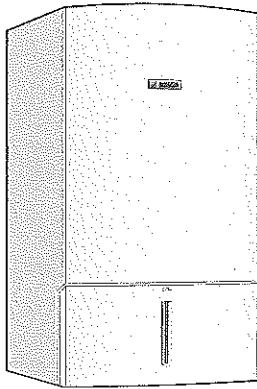

ZWB28-3: Greenstar Combi 100

ZWB35-3: Greenstar Combi 131

ZWB42-3: Greenstar Combi 151



Most Efficient
2015
www.energystar.gov

MA Plumbing Board approved

Product Details

- ▶ Gas-fired, sealed combustion, modulating combination boilers that condense in both space heating and DHW production, available in three sizes.
- ▶ Certified by AHRI, ASME, CSA
- ▶ Low NOx emissions ahead of 2012 SCAQMD regulations.
- ▶ AFUE Ratings of 95%
- ▶ High strength stainless steel flat plate heat exchanger for endless domestic hot water (DHW).
- ▶ Integral 3.2 gallon boiler expansion tank
- ▶ Hydronic bracket for securing bottom of boiler to wall, union connections and M NPT threads
- ▶ Coated heat exchanger allows service intervals to be extended to 5 years for cleaning
- ▶ Venting solutions include: concentric, one or two pipe venting
 - Approved materials are CPVC, PVC, rigid PP, flexible PP and stainless steel
 - 3" PVC venting can be up to 100' with up to 8 elbows
 - 2" PVC lengths can be up to 81'
- ▶ Control
 - Heatronic III with high limit dials for space heating and DHW for simplicity and ease of operation
 - Digital display for fluid temperature leaving the heat exchanger, service function codes, and operation icons.
 - Outdoor Reset when installed with the FW200
- ▶ 5 year parts and labor warranty and 10 year limited lifetime on heat exchanger

Engineering specification

The boiler shall be a Bosch Greenstar ___ wall hung combination boiler for space heating and domestic hot water (DHW) production via a stainless steel flat plate heat exchanger 3 way valve and integrated 3.2 gallon expansion tank.

The boiler shall be certified to meet the AHRI, ASME standards and shall be certified by CSA. The boiler shall come equipped for Natural Gas fuel source. A Liquid Propane (LP) conversion kit shall be included in the contents of delivery.

The boiler shall be Energy Star rated with an AFUE rating of

95% and qualified for Federal Tax Credit. It shall meet the 2012 SCAQMD regulations for Low NOx emissions.

The boiler shall be equipped with a high-strength stainless steel flat plate heat exchanger and burner with double passage - ensuring consistent temperature output based on demand. The domestic hot water temperature shall be limited to 140°F to help prevent scale build-up within the heat exchanger.

Overall dimensions shall be 33-15/32" x 17-21/64" x 13-57/64" (height x with x depth).

Bosch Greenstar
Wall Hung Combi Boiler



BOSCH

Technical Data Greenstar 100 (ZWB28-3) Combi Boiler			
Output at elevation 0 - 2000 feet (0 - 610 m)	Unit	NG	LPG (propane)
Max. input rate 180/79 °F (82/26 °C)	BTU/hr (kW)	100,800 (29.5)	98,600 (28.9)
Max. output rate 104/86 °F (40/30 °C)	BTU/hr (kW)	93,800 (27.5)	93,800 (27.5)
Max. output rate 122/86 °F (50/30 °C)	BTU/hr (kW)	93,100 (27.3)	93,100 (27.3)
Max. output rate 176/140 °F (80/60 °C)	BTU/hr (kW)	89,400 (26.2)	89,400 (26.2)
Output rate domestic hot water (DHW), 113 °F (45 °C)	BTU/hr (kW)	93,600 (27.4)	93,600 (27.4)
Output rate domestic hot water (DHW), 140 °F (60 °C)	BTU/hr (kW)	91,400 (26.8)	91,400 (26.8)
Min. input rate 180/79 °F (82/26 °C)	BTU/hr (kW)	24,600 (7.2)	40,100 (11.7)
Min. output rate 104/86 °F (40/30 °C)	BTU/hr (kW)	23,900 (7.0)	39,900 (11.7)
Min. output rate 122/86 °F (50/30 °C)	BTU/hr (kW)	23,900 (7.0)	39,600 (11.6)
Min. output rate 176/140 °F (80/60 °C)	BTU/hr (kW)	21,800 (6.4)	36,200 (10.6)
Gas supply requirements			
Natural Gas – Hs = 1,010 BTU/ft ³ (37.3MJ/m ³)	ft ³ /hr (m ³ /h)	99 (2.8)	–
Liquid Propane Gas – HD-S = 2,500 BTU/ft ³ (93.1MJ/m ³)	ft ³ /hr (m ³ /h)	–	39 (1.1)
NG	in. W.C. (mbar)	3.5 - 10.5" (8.7 - 26.1)	–
LPG (propane)	in. W.C. (mbar)	–	8 - 13" (19.9 - 32.3)
Expansion vessel			
Pre-charge pressure	psi (bar)	10.9 (0.75)	
Total contents	Gal (L)	3.17 (12)	
DHW			
Max. DHW flow rate @ 72° rise	gpm (l/min)	2.64 (10)	
Nominal DHW quantity (at 140 °F (60 °C) outlet temperature)	gpm (l/min)	2.03 (7.7)	
Outlet temperature	°F (°C)	104 - 140 (40 - 60)	
Max. cold water inlet temperature	°F (°C)	140 (60)	
Max. approved DHW pressure	psi (bar)	150 (10.3)	
Minimum water pressure	psi (bar)	4.35 (0.3)	
Flue Gas			
Flue gas mass flow at maximum/minimum nominal output	gps	12.0/3.2	11.7/4.9
Flue gas temperature 176/140 °F (80/60 °C) at maximum/minimum nominal heat input	°F (°C)	147/133 (64/56)	
Flue gas temperature 104/86 °F (40/30 °C) at maximum/minimum nominal heat input	°F (°C)	117/90 (47/32)	
CO ₂ at max. nominal output	%	9.4	11.0
CO ₂ at minimum nominal output	%	8.6	10.4
General			
Condensate Max. condensate quantity (t _R = 86 °F (30 °C))	gph (l/h)	0.6 (2.3)	
pH level, approx.	%	4.8	
Voltage	VAC	120	
Frequency	Hz	60	
Max. power consumption (central heating mode)	W	205	
Max. power consumption (Stand-by)	W	< 6	
Noise level	dB(A)	≤ 39	
Maximum supply temperature	°F (°C)	190 (88)	
Max. permissible operating pressure (P _{MS}) heating	psi (bar)	30 (2.07)	
Permissible ambient temperature	°F (°C)	32 - 122 (0 - 50)	
Nominal water capacity (heating)	Gal (L)	0.925 (3.5)	
Weight (without packaging)	lbs. (kg)	110.2 (50)	
Dimensions, W x H x D	Inch(mm)	17-21/64" × 33-15/32" × 13-57/64" (440 × 850 × 353)	

Bosch Greenstar Wall Hung Combi Boiler



Technical Data Greenstar 131 (ZWB35-3) Combi Boiler			
Output at elevation 0 - 2000 feet (0 - 610 m)	Unit	NG	LPG (propane)
Max. input rate 180/79 °F (82/26 °C)	BTU/hr (kW)	131,900 (38.6)	129,100 (37.8)
Max. output rate 104/86 °F (40/30 °C)	BTU/hr (kW)	122,800 (36.0)	122,800 (36.0)
Max. output rate 122/86 °F (50/30 °C)	BTU/hr (kW)	121,800 (35.7)	121,800 (35.7)
Max. output rate 176/140 °F (80/60 °C)	BTU/hr (kW)	116,700 (34.2)	116,700 (34.2)
Output rate domestic hot water (DHW), 113 °F (45 °C)	BTU/hr (kW)	120,500 (35.3)	120,500 (35.3)
Output rate domestic hot water (DHW), 140 °F (60 °C)	BTU/hr (kW)	118,700 (34.8)	118,700 (34.8)
Min. input rate 180/79 °F (82/26 °C)	BTU/hr (kW)	36,000 (10.5)	46,400 (13.6)
Min. output rate 104/86 °F (40/30 °C)	BTU/hr (kW)	35,100 (10.3)	46,100 (13.5)
Min. output rate 122/86 °F (50/30 °C)	BTU/hr (kW)	34,800 (10.2)	45,700 (13.4)
Min. output rate 176/140 °F (80/60 °C)	BTU/hr (kW)	31,700 (9.3)	42,000 (12.3)
Gas supply requirements			
Natural Gas – Hs = 1,010 BTU/ft ³ (37.3MJ/m ³)	ft ³ /hr (m ³ /h)	130 (3.7)	–
Liquid Propane Gas – HD-S = 2,500 BTU/ft ³ (93.1MJ/m ³)	ft ³ /hr (m ³ /h)	–	52 (1.5)
NG	in. W.C. (mbar)	3.5 - 10.5" (8.7 - 26.1)	–
LPG (propane)	in. W.C. (mbar)	–	8 - 13" (19.9 - 32.3)
Expansion vessel			
Pre-charge pressure	psi (bar)	10.9 (0.75)	
Total contents	Gal (L)	3.17 (12)	
DHW			
Max. DHW flow rate @ 72° rise	gpm (l/min)	3.2 (12)	
Nominal DHW quantity (at 140 °F (60 °C) outlet temperature)	gpm (l/min)	2.6 (10)	
Outlet temperature	°F (°C)	104 - 140 (40 - 60)	
Max. cold water inlet temperature	°F (°C)	140 (60)	
Max. approved DHW pressure	psi (bar)	150 (10.3)	
Minimum water pressure	psi (bar)	4.35 (0.3)	
Flue Gas			
Flue gas mass flow at maximum/minimum nominal output	gps	15.7/4.5	15.2/5.6
Flue gas temperature 176/140 °F (80/60 °C) at maximum/minimum nominal heat input	°F (°C)	162/135 (72/57)	
Flue gas temperature 104/86 °F (40/30 °C) at maximum/minimum nominal heat input	°F (°C)	127/91 (53/33)	
CO ₂ at max. nominal output	%	9.4	11.0
CO ₂ at minimum nominal output	%	8.6	10.4
General			
Condensate Max. condensate quantity (t _R = 86 °F (30 °C))	gph (l/h)	0.8 (3.1)	
pH level, approx.	%	4.8	
Voltage	VAC	120	
Frequency	Hz	60	
Max. power consumption (central heating mode)	W	205	
Max. power consumption (Stand-by)	W	< 6	
Noise level	dB(A)	≤ 44	
Maximum supply temperature	°F (°C)	190 (88)	
Max. permissible operating pressure (P _{MS}) heating	psi (bar)	30 (2.07)	
Permissible ambient temperature	°F (°C)	32 - 122 (0 - 50)	
Nominal water capacity (heating)	Gal (L)	0.925 (3.5)	
Weight (without packaging)	lbs. (kg)	110.2 (50)	
Dimensions, W x H x D	inch(mm)	17-21/64" x 33-15/32" x 13-57/64" (440 x 850 x 353)	

Bosch Greenstar
Wall Hung Combi Boiler



BOSCH

Technical Data Greenstar 151 (ZWB42-3) Combi Boiler			
Output at elevation 0 - 2000 feet (0 - 610 m)	Unit	NG	LPG (propane)
Max. input rate 180/79 °F (82/26 °C)	BTU/hr (kW)	151,600 (44.4)	148,300 (43.5)
Max. output rate 104/86 °F (40/30 °C)	BTU/hr (kW)	137,500 (40.3)	137,500 (40.3)
Max. output rate 122/86 °F (50/30 °C)	BTU/hr (kW)	137,500 (40.3)	137,500 (40.3)
Max. output rate 176/140 °F (80/60 °C)	BTU/hr (kW)	134,400 (39.4)	134,400 (39.4)
Output rate domestic hot water (DHW), 113 °F (45 °C)	BTU/hr (kW)	137,500 (40.3)	137,500 (40.3)
Output rate domestic hot water (DHW), 140 °F (60 °C)	BTU/hr (kW)	135,800 (39.8)	135,800 (39.8)
Min. input rate 180/79 °F (82/26 °C)	BTU/hr (kW)	36,000 (10.5)	46,400 (13.6)
Min. output rate 104/86 °F (40/30 °C)	BTU/hr (kW)	35,500 (10.4)	46,400 (13.6)
Min. output rate 122/86 °F (50/30 °C)	BTU/hr (kW)	35,100 (10.3)	46,100 (13.5)
Min. output rate 176/140 °F (80/60 °C)	BTU/hr (kW)	31,700 (9.3)	42,000 (12.3)
Gas supply requirements			
Natural Gas – Hs = 1,010 BTU/ft ³ (37.3MJ/m ³)	ft ³ /hr (m ³ /h)	149 (4.2)	–
Liquid Propane Gas – HD-S = 2,500 BTU/ft ³ (93.1MJ/m ³)	ft ³ /hr (m ³ /h)	–	59 (1.7)
NG	in. W.C. (mbar)	3.5 - 10.5" (8.7 - 26.1)	–
LPG (propane)	in. W.C. (mbar)	–	8 - 13" (19.9 - 32.3)
Expansion vessel			
Pre-charge pressure	psi (bar)	10.9 (0.75)	
Total contents	Gal (L)	3.17 (12)	
DHW			
Max. DHW flow rate @ 72° rise	gpm (l/min)	3.96 (15)	
Nominal DHW quantity (at 140 °F (60 °C) outlet temperature)	gpm (l/min)	3.61 (11.4)	
Outlet temperature	°F (°C)	104 - 140 (40 - 60)	
Max. cold water inlet temperature	°F (°C)	140 (60)	
Max. approved DHW pressure	psi (bar)	150 (10.3)	
Minimum water pressure	psi (bar)	4.35 (0.3)	
Flue Gas			
Flue gas mass flow at maximum/minimum nominal output	gps	18.0/4.5	17.5/5.6
Flue gas temperature 176/140 °F (80/60 °C) at maximum/minimum nominal heat input	°F (°C)	171/135 (77/57)	
Flue gas temperature 104/86 °F (40/30 °C) at maximum/minimum nominal heat input	°F (°C)	133/91 (56/33)	
CO ₂ at max. nominal output	%	9.4	11.0
CO ₂ at minimum nominal output	%	8.6	10.4
General			
Condensate Max. condensate quantity (t _R = 86 °F (30 °C))	gph (l/h)	0.9 (3.5)	
pH level, approx.	%	4.8	
Voltage	VAC	120	
Frequency	Hz	60	
Max. power consumption (central heating mode)	W	205	
Max. power consumption (Stand-by)	W	< 6	
Noise level	dB(A)	≤ 45	
Maximum supply temperature	°F (°C)	190 (88)	
Max. permissible operating pressure (P _{MS}) heating	psi (bar)	30 (2.07)	
Permissible ambient temperature	°F (°C)	32 - 122 (0 - 50)	
Nominal water capacity (heating)	Gal (L)	0.925 (3.5)	
Weight (without packaging)	lbs. (kg)	110.2 (50)	
Dimensions, W x H x D	Inch(mm)	17-21/64" × 33-15/32" × 13-57/64" (440 × 850 × 353)	


Bosch Greenstar
Wall Hung Combi Boiler



BOSCH

Technical Data Greenstar 151 (ZWB42-3) Combi Boiler Continued			
	Unit	NG	LPG (propane)
Output at elevation 2000 - 4500 feet (611 - 1372 m) above sea level			
Max. input rate 180/79 °F (82/26 °C)	BTU/hr (kW)	136,440 (40.0)	139,402 (40.9)
Max. output rate 104/86 °F (40/30 °C)	BTU/hr (kW)	123,750 (36.3)	129,250 (37.9)
Max. output rate 122/86 °F (50/30 °C)	BTU/hr (kW)	123,750 (36.3)	129,250 (37.9)
Max. output rate 176/140 °F (80/60 °C)	BTU/hr (kW)	120,960 (35.5)	126,336 (37.0)
Output rate domestic hot water (DHW), 113 °F (45 °C)	BTU/hr (kW)	123,750 (36.3)	129,250 (37.9)
Output rate domestic hot water (DHW), 140 °F (60 °C)	BTU/hr (kW)	122,220 (35.8)	127,652 (37.4)
Output at elevation 4500 - 7000 feet (1373 - 2134 m) above sea level			
Max. input rate 180/79 °F (82/26 °C)	BTU/hr (kW)	125,828 (36.9)	129,021 (37.8)
Max. output rate 104/86 °F (40/30 °C)	BTU/hr (kW)	114,125 (33.5)	119,625 (35.1)
Max. output rate 122/86 °F (50/30 °C)	BTU/hr (kW)	114,125 (33.5)	119,625 (35.1)
Max. output rate 176/140 °F (80/60 °C)	BTU/hr (kW)	111,552 (32.7)	116,928 (34.3)
Output rate domestic hot water (DHW), 113 °F (45 °C)	BTU/hr (kW)	114,125 (33.5)	119,625 (35.1)
Output rate domestic hot water (DHW), 140 °F (60 °C)	BTU/hr (kW)	112,714 (33.0)	118,146 (34.6)

Greenstar (ZWB) Combi Boiler Dimensions and Minimum Clearances

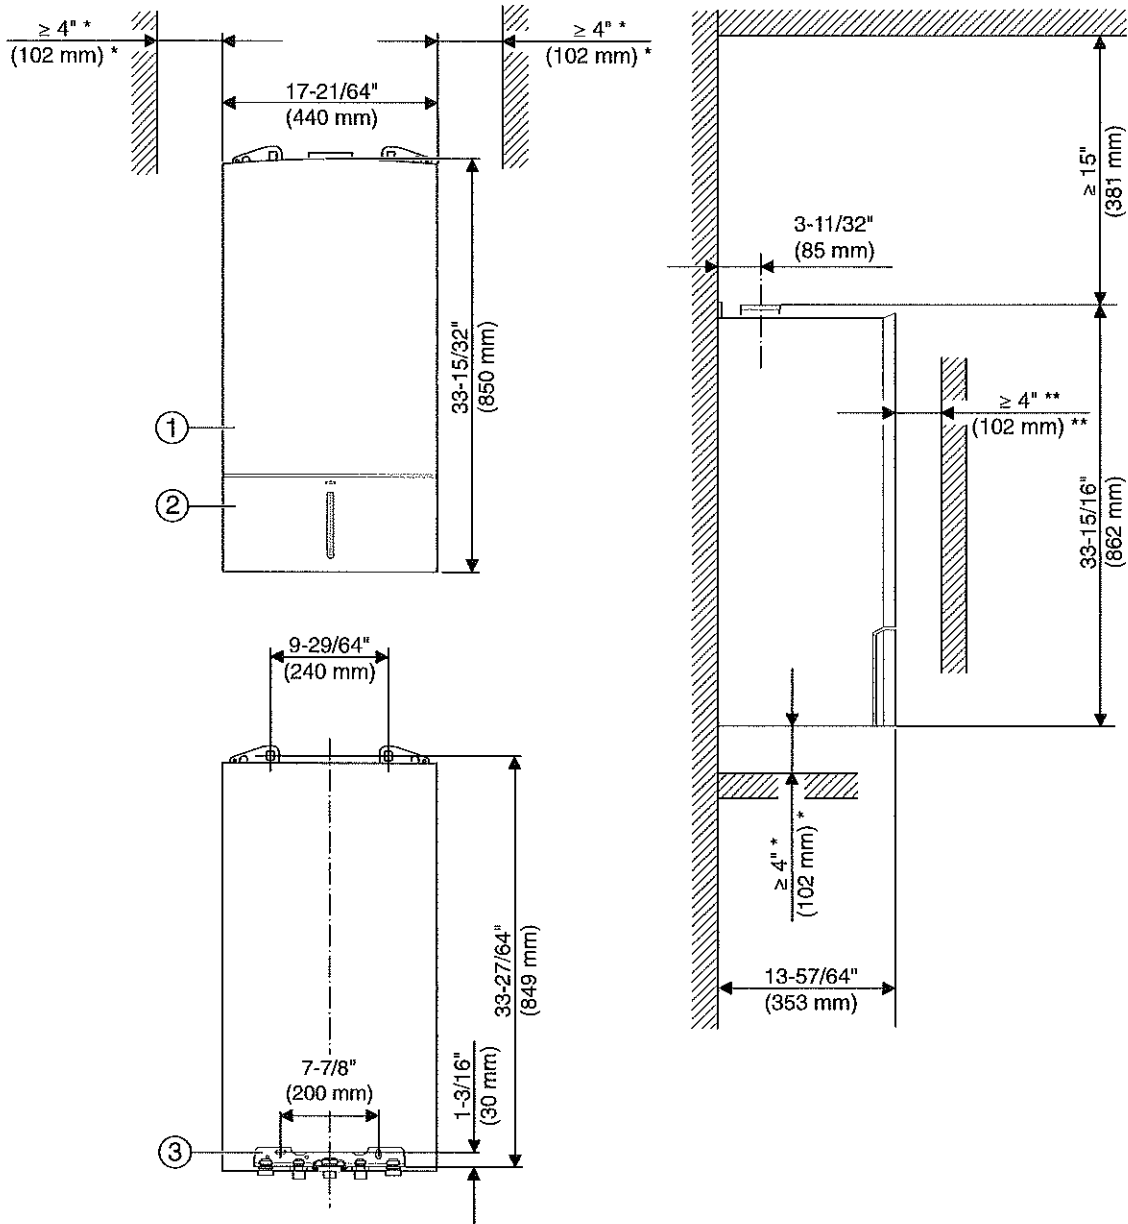

- 1 Appliance jacket
- 2 Service cover
- 3 Hydraulics connection plate

(*) Zero clearance from combustibles permitted, but 4" (102 mm) recommended for serviceability

(**) Distance to door, if mounted inside a closet