

# 9RLFFH Submittal



**AOU9RLFFH, AGU9RLF**  
**Inverter Driven Heat Pump**

Job Name: Harry Fox  
 Location: 21 Reservoir Rd, Peaks Island  
 Engineer: n/a  
 Submitted to: City of Portland  
 Submitted by: Loggin Energy  
 Reference: n/a

Approval: \_\_\_\_\_  
 Date: \_\_\_\_\_  
 Construction: \_\_\_\_\_  
 Unit #: \_\_\_\_\_  
 Drawing #: \_\_\_\_\_

**Outdoor Unit Power** 208-230VAC-1Ph-60Hz  
 Available Voltage Range 187-253VAC  
 Fuse Size, Max. 15A  
 MCA 11.8A

**Compressor** Inverter Driven Variable Speed DC Rotary  
 No. used 1  
 Output 850W  
 Lubricant Oil POE (RB68)  
**Fan type** Propeller  
 Motor Output 115W  
 Airflow Rate Cooling/Heating (High) 1207 / 1207CFM

**Refrigerant** 410A  
 Outdoor Unit 2lbs 10oz  
 Control Electronic Expansion Valve  
 O.D. Discharge (in) 1/4" (Flare)  
 O.D. Suction (in) 3/8" (Flare)

**Dimensions** H x W x D  
 Uncrated (in) 24-7/16 x 31-1/8 x 11-7/16  
 (mm) (620 x 790 x 290)  
 Crated (in) 28-1/16 x 37-3/16 x 15-9/16  
 (mm) (713 x 945 x 395)




**Weight** Outdoor  
 Net 86lbs (39kg)  
 Gross Shipping 95lbs (43kg)

**Cooling**  
 Rated Capacity 9,000BTU/h  
 Min-Max Capacity 3,100~13,000BTU/h  
 Rated Power Input 0.56kw  
 Max. Power Input 2.05kw  
 SEER 26  
 EER 16  
 Outdoor Sound Rating 49dB

**Heating**  
 Rated Capacity 12,000BTU/h  
 Min-Max Capacity 3,100~18,800BTU/h  
 Rated Power Input 0.80kw  
 Max. Power Input 2.62kw  
 HSPF 12.4  
 EER 16  
 Outdoor Sound Rating 50dB

**Piping Lengths**  
 Max. Piping Length (Total) 66ft  
 Max. Pipe Height Difference 49ft  
 Connection method (Flared)

**Operating Range**  
 Cooling 14°F~115°F DB  
 Heating -15°F~75°F DB

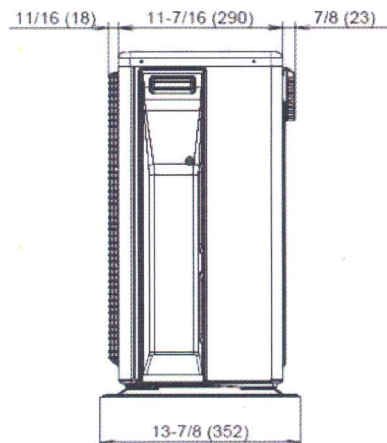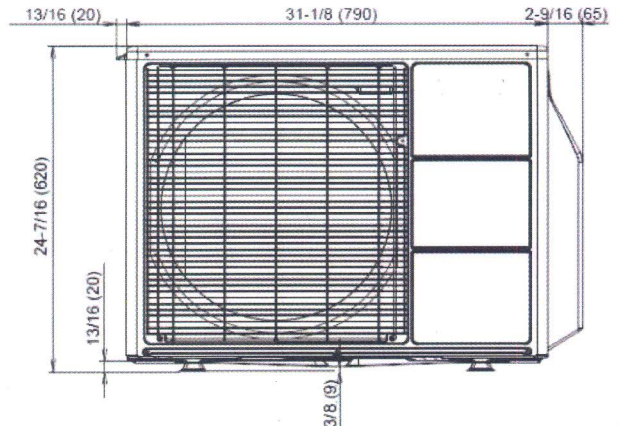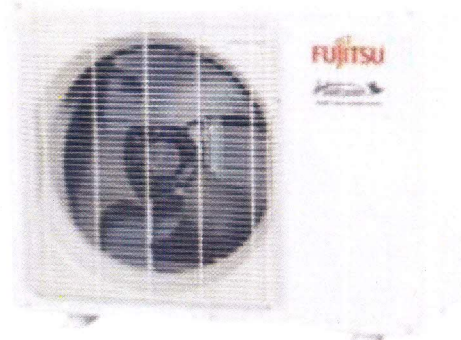

Fujitsu General America, Inc.  
 Fairfield, NJ 07004  
 Toll Free: 1-888-888-3424  
 Fax: (973) 836-0447  
[www.fujitsugeneral.com](http://www.fujitsugeneral.com)

Fujitsu products are subject to continuous improvements. Fujitsu reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations.



Note: Specifications are based on the following conditions.  
 Power source of specifications : 230V

Cooling: Indoor temperature of 80°F(26.67°C)DB / 67°F(19.44°C)WB, and outdoor temperature of 95°F(35°C)DB/75°F(23.89°C)WB.  
 Heating: Indoor temperature of 70°F(21.11°C)DB / 60°F(15.56°C)WB, and outdoor temperature of 47°F(8.33°C)DB/43°F(6.11°C)WB.  
 Pipe length : 24ft. 7in.(7.5m), Height difference : 0 ft.(0m) [Outdoor unit - Indoor unit]





<b>Indoor Unit Power</b>	208-230/VAC-1Ph-60Hz	
<b>Available Voltage Range</b>	187-253VAC	
<b>Fan type</b>	Cross flow	
<b>Motor Output</b>	32W	
<b>Motor Type</b>	E.C.M.	
<b>MCA</b>	0.7A	
<b>Sound Pressure Level</b>		
Cooling	Lo-Hi	23-40dB
Heating	Lo-Hi	23-40dB
<b>Airflow rate</b>		
Cooling	Lo-Hi	159-336CFM
Heating	Lo-Hi	159-353CFM
<b>Dimensions</b>	H x W x D	
Uncrated	(in)	23-5/8 x 29-1/8 x 7-7/8
	(mm)	(600 x 740 x 200)
Crated	(in)	27-9/16 x 32-5/16 x 12-3/16
	(mm)	(700 x 820 x 310)
<b>Weight</b>	Indoor	
Net	31lbs (14kg)	
Gross Shipping	37lbs (17kg)	

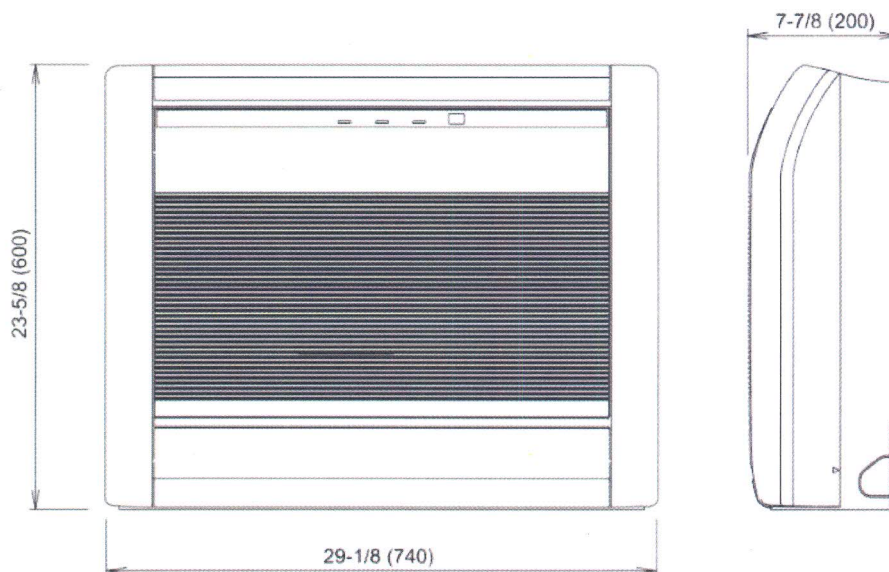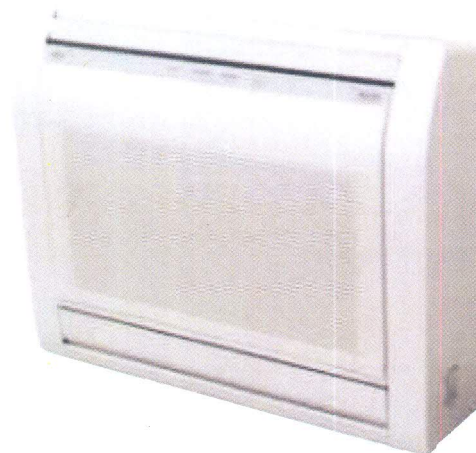

Fujitsu General America, Inc.  
 Fairfield, NJ 07004  
 Toll Free: 1-888-888-3424  
 Fax: (973) 836-0447  
 www.fujitsugeneral.com

Fujitsu products are subject to continuous improvements. Fujitsu reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations.

