

Job Name: Phil Friedman

Date: 5/26/15

Location: 26 Sunset Rd, Peaks Island

Approval: _____

Engineer: n/a

Construction: _____

Submitted to: City of Portland

Unit #: _____

Submitted by: Joggin Energy

Drawing #: _____

Reference: n/a

General Features

- Refrigerant Type R410A.
- Human Sensor
- Wired and wireless remote controllers
- Double swing automatic
- Automatic airflow adjustment
- Low noise mode
- Powerful mode
- 5- Years Parts, 7-Years Compressor Warranty (See Warranty Statement for details)
- Program timer
- Weekly time

Model Information

Outdoor..... AOU15RLS3
Indoor..... ASU15RLS3

Electrical

Available Voltage Range..... 208/230V AC 1ph-60Hz
Minimum Circuit Ampacity..... 208/230 +/- 10%
Max Fuse Size..... 17.2 A
Max Starting Current..... 20A

Inn it Power

Cooling..... 1.04 kW
Heating..... 1.15 kW

Rur ning Current

Cooling..... 4.8 A
Heating..... 5.2 A

Capacity

Nominal Cooling..... 15,000 Btu
Min-Max Cooling..... 3,100-18,400 Btu/h
Nominal Heating..... 18,000 Btu/h
Min-Max Heating..... 3,100-23,900 Btu

Compressor

Motor Output..... Rotary (inv x1)
Refrigerant..... R410a
Charge..... 3 lbs. 1 oz
Oil..... FREOL a68SZ


Fan Motor

(Con denser) Type: DC..... Propeller x 1
(Con denser) Motor Output..... 49 W
(Evaporator) Type: DC..... Cross flow fan x1
(Evaporator) Motor Output..... 61 W

Heat Exchanger {Condenser (C) Evaporator (E)}

Dimensions (H x W x D)
Condenser..... 23-1/8 x 34-11/16 x 1-7/16 in. (588x881x36.4 mm)
Evaporator..... Main 15-1/8 x 28-3/8 x 1-3/16 in. (384x720x30) Sub 3-5/16 x 28-3/8 x 1/2 in. (84x720x13.3 mm) 4-15/16 x 28-3/8 x 1/2 in. (126x720x13.3 mm)
Fin Pitch..... 20 FPI (C) Main 21 FPI Sub 18 FPI (E)
Rows x Stages..... 2 x 28 (C) Main 3 x 24 Sub 1 x 10 (E)
Pipe Type (Material)..... Copper (C) Copper (E)
Fin Type (Material)..... Aluminum (C) Aluminum (E)

Note: Specifications are based on the following conditions.
Cooling: In room temperature of 80°F (26.7°C) DB/67°F (19.4°C) WB, and outdoor temperature of 95°F (35°C) DB/75°F (23.9°C) WB.
Heating: In room temperature of 70°F (21.1°C) DB/59°F (15.0°C) WB, and outdoor temperature of 47°F (8.33°C) DB/43°F (6.11°C) WB.
Pipe length: 24ft. 7in. (7.5m). Height difference: 0ft. (0m) (Outdoor unit – indoor unit)

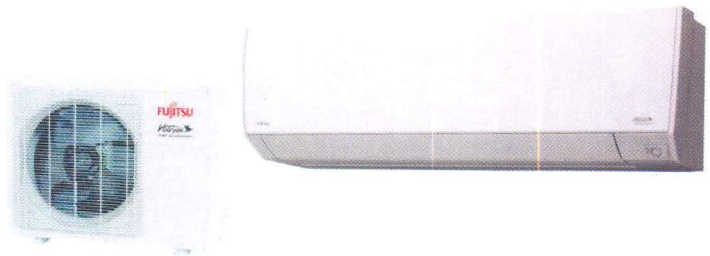

Operation Temperature Range

Cooling..... 14°F (-10°C) to 115°F (46°C)
Heating..... -5°F (-21°C) to 75°F (24°C)

Efficiency

SEER..... 25.3
EER (cooling)..... 4.09 kW/kW
COP (heating)..... 4.59kW/kW / 15.7 Btu/hW
HSPF (heating)..... 13.4 Btu/hW

Enclosure (Condenser)

Material..... Painted galvanized steel
Color..... Beige (10 YR 7.5/1.0 NN)

Sound Pressure Level

Outdoor..... 49 dB(A)
Indoor..... 45 dB(A)

Dimensions

H x W x D
Outdoor in. (mm)..... 24-1/2 (620) x 31-1/8 (790) x 11-7/16 (290)
Indoor in. (mm)..... 11-5/8 (295) x 37 (940) x 10-5/8 (270)

Connection Pipe

Liquid..... 1/4" / 6.35 mm Flare
Gas..... 1/2" / 12.7 mm Flare
Method (Liquid/Gas)..... Brazing
Max Length (Pre-charge)..... 65 ft. (20 m) / (49 ft. {15 m})
Max Height Difference..... 49 ft. (15 m)

Weight



Outdoor..... 86 lbs (39 kg)
Indoor..... 31 lbs (14 kg)

Accessories



Wired Remote Controller..... UTY-RVNUM
Wired Remote Controller..... UTY-RNNUM
Simple Remote Controller..... UTY-RSNUM
Communication Kit..... UTY-TWBXF1
External Connection Kit..... UTY-XWZXZ5

Dimensions: 15RLS3

[Unit: in. (mm)]


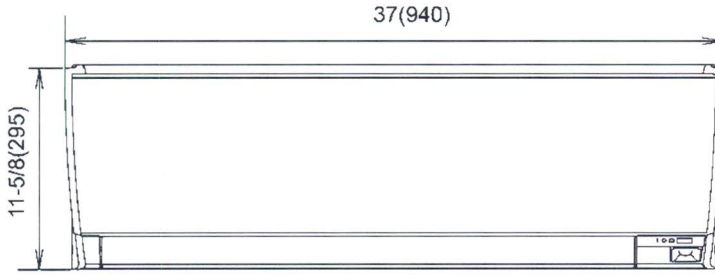


3/4(19) 31-1/8(790) 2-5/8(67) 11/16(18) 11-5/16(288) 7/8(23)

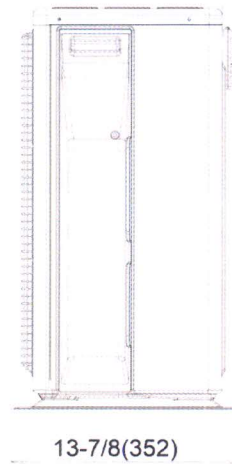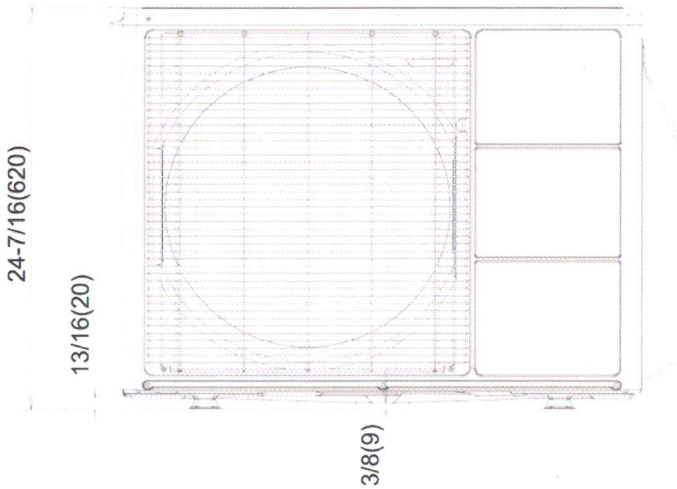

Front view

Side view

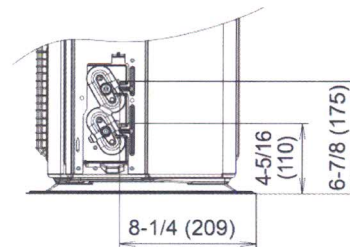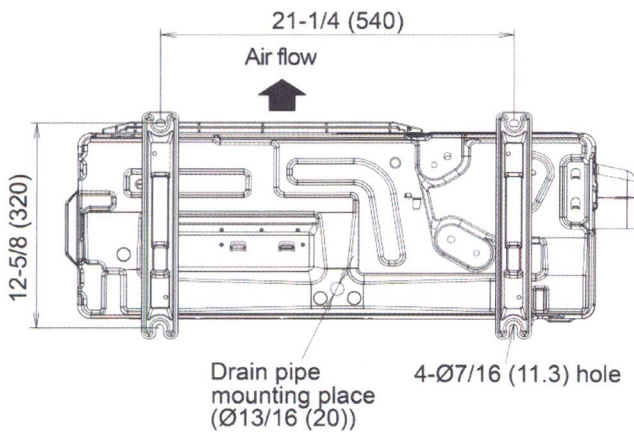

Bottom view