

2010 6020

SUBSURFACE WASTEWATER DISPOSAL SYSTEM APPLICATION

Maine Department of Human Services
Division of Health Engineering, Station 10 SHS
(207) 287-5672 FAX (207) 287-4172

PROPERTY LOCATION

City, Town, or Plantation: **PORTLAND (PEAKS ISLAND)**

Street or Road: **317 PLEASANT AVENUE**

Subdivision, Lot #:

>> Caution: Permit Required - Attach In Space Below <<

PORTLAND
Date Permit Issued: **12/19/10**

PERMIT # 11504 TOWN COPY

\$ **1101900** Double Fee Charged

Jeanne Bomke
Local Plumbing Inspector Signature

L.P.I. # **0732**

OWNER/APPLICANT INFORMATION

Name (last, first, MI): **HALL Dan ielle ANN Mulhern** Owner/Applicant

Mailing Address of: **98 Island Avenue Peaks Island, ME, 04108**

Daytime Tel.: **766-2514**

092 Dool

Municipal Tax Map # **92** Lot # **D-12**

Owner or Applicant Statement

I state and acknowledge that the information submitted is correct to the best of my knowledge and understand that any falsification is reason for the Department and/or Local Plumbing Inspector to deny a permit.

Danielle M. Mulhern LPA
Signature of Owner/Applicant

12-6-10
Date

Caution: Inspections Required

I have inspected the installation authorized above and found it to be in compliance with the Subsurface Wastewater Disposal Rules Application.

(1st) Date Approved _____
Local Plumbing Inspector Signature _____
(2nd) Date Approved _____

PERMIT INFORMATION

TYPE OF APPLICATION

1. First Time System
2. Replacement System
Type Replaced: **STEEL TANK / TRENCH**
Year Installed: **PRE-1974**

3. Expanded System
a. Minor Expansion
b. Major Expansion

4. Experimental System
5. Seasonal Conversion

SIZE OF PROPERTY
+/- **0.48** sq. ft. acres

SHORELAND ZONING
 Yes No

THIS APPLICATION REQUIRES

1. No Rule Variance
2. First Time System Variance
a. Local Plumbing Inspector Approval
b. State & Local Plumbing Inspector Approval

3. Replacement System Variance
a. Local Plumbing Inspector Approval
b. State & Local Plumbing Inspector Approval

4. Minimum Lot Size Variance
5. Seasonal Conversion Approval

DISPOSAL SYSTEM TO SERVE

1. Single Family Dwelling Unit, No. of Bedrooms: **3**
2. Multiple Family Dwelling, No. of Units: _____
3. Other: _____

SPECIFY _____
Current Use Seasonal Year Round Undeveloped

DISPOSAL SYSTEM COMPONENTS

1. Complete Non-Engineered System
2. Primitive System (graywater & alt toilet)
3. Alternative Toilet, specify: _____
4. Non-Engineered Treatment Tank (only)
5. Holding Tank, _____ Gallons
6. Non-Engineered Disposal Field (only)
7. Separated Laundry System
8. Complete Engineered System (2000 gpd)
9. Engineered Treatment Tank (only)
10. Engineered Disposal Field (only)
11. Pre-treatment, specify: _____
12. Miscellaneous components

TYPE OF WATER SUPPLY

1. Drilled Well 2. Dug Well 3. Private
4. Public 5. Other:

DESIGN DETAILS (SYSTEM LAYOUT SHOWN ON PAGE 3)

TREATMENT TANK

1. Concrete
a. Regular
b. Low Profile
2. Plastic
3. Other: _____
CAPACITY: **1000** gallons

SOIL DATA & DESIGN CLASS
PROFILE **4** / CONDITION **C** / DESIGN **I**
AT Observation Hole - **TP 1**
Depth **40** " Elevation **-32** "
OF MOST LIMITING SOIL FACTOR

DISPOSAL FIELD TYPE & SIZE

1. Stone Bed 2. Stone Trench
3. Proprietary Device
a. Cluster array c. Linear
b. Regular d. H-20 loaded
4. Other: _____
SIZE: **880** sq. ft. lin. ft.
20 STANDARD 12" TALL PLASTIC CHAMBERS

DISPOSAL FIELD SIZING

1. Small - 2.0 sq.ft./gpd
2. Medium - 2.6 sq.ft./gpd
3. Medium-Large - 3.3 sq.ft./gpd
4. Large - 4.1 sq.ft./gpd
5. Extra-Large - 5.0 sq.ft./gpd

GARBAGE DISPOSAL UNIT

1. No 3. Maybe
2. Yes >> Specify one below:
a. Multi-compartment tank
b. _____ tanks in series
c. Increase in tank capacity
d. Filter on tank outlet

EFFLUENT/EJECTOR PUMP

1. Not required SEE NOTE ON
2. May be required PAGE 3
3. Required
Specify only for engineered systems:
DOSE: _____ Gallons

DESIGN FLOW
270 gallons per day
BASED ON:
1. Table 501.1 (dwelling unit(s))
2. Table 501.2 (other facilities)
SHOW CALCULATIONS for other facilities

3 BEDROOMS AT 90 GALLONS PER DAY EACH

3. Section 503.0 (meter readings) ATTACH WATER-METER DATA

LATITUDE AND LONGITUDE
at center of disposal area
Lat **N 43** d **40** m **11** s
Lon **W 70** d **11** m **18** s
at g.p.s. state margin of error

SITE EVALUATOR STATEMENT

I certify that on **12/3/10** (date) I completed a site evaluation on this property and state that the data reported is accurate and that the proposed system is in compliance with the Subsurface Wastewater Disposal Rules (10-144A CMR 241).

Albert Frick Site Evaluator Signature **63** SE • **12/6/2010** Date

ALBERT FRICK Site Evaluator Name Printed **(207) 839-5563** Telephone Number **AFA@MAINERR.COM** E-mail Address

ALBERT FRICK ASSOCIATES - 95A COUNTY ROAD ROAD, GORHAM, MAINE 04038 - (207) 839-5563
Note: Changes to or deviations from the design should be confirmed with the Site Evaluator
HHE-200 Rev 4/05

SUBSURFACE WASTEWATER DISPOSAL SYSTEM APPLICATION

Maine Department of Human Services
 Division of Health Engineering, Station 10 SHS
 (207) 287-5672 FAX (207) 287-4172

Town, City, Plantation PORTLAND (PEAKS ISLAND)	Street, Road Subdivision 317 PLEASANT AVENUE	Owner's Name ANN HALL
Scale 1" = <u>50</u> Ft. or as shown		SITE LOCATION PLAN (Attach Map from Maine Atlas for New System Variance)
SITE PLAN 		NOTE : PROPERTY INFORMATION APPROXIMATED PER PLAN BY BRUCE BOWMAN DATED 10-15-92
NOTE : TEST BORINGS AT ALL CORNERS + 40" TO BEDROCK		

SOIL DESCRIPTION AND CLASSIFICATION (Location of Observation Holes Shown Above)

Observation Hole TP 1 Test Pit Boring
 " Depth of Organic Horizon Above Mineral Soil

DEPTH BELOW MINERAL SOIL SURFACE (inches)	Texture	Consistency	Color	Mottling
0			DARK BROWN	
0-10	SANDY LOAM		YELLOWISH BROWN	
10-20	CRUSHED STONE		GRAY	
20-30		FRIABLE		
30-40	GRAVELLY LOAMY SAND		LIGHT YELLOWISH BROWN	
40-50				FEW, FAINT
50	LIMIT OF EXCAVATION			

Soil Classification 4 C	Slope %	Limiting Factor 40"	<input checked="" type="checkbox"/> Ground Water <input type="checkbox"/> Restrictive Layer <input type="checkbox"/> Bedrock <input type="checkbox"/> Pit Depth
Profile	Condition		

Observation Hole _____ Test Pit Boring
 " Depth of Organic Horizon Above Mineral Soil

DEPTH BELOW MINERAL SOIL SURFACE (inches)	Texture	Consistency	Color	Mottling
0				
10				
20				
30				
40				
50				

Soil Classification	Slope	Limiting Factor	<input type="checkbox"/> Ground Water <input type="checkbox"/> Restrictive Layer <input type="checkbox"/> Bedrock <input type="checkbox"/> Pit Depth
Profile	Condition		

Albert Frick
 Site Evaluator Signature

63
 SE

12/6/2010
 Date

SUBSURFACE WASTEWATER DISPOSAL SYSTEM APPLICATION

Maine Department of Human Services
Division of Health Engineering, Station 10, SHS
(207) 287-5672 FAX (207) 287-4172

Town, City, Plantation
PORTLAND (PEAKS ISLAND)


Street, Road, Subdivision
317 PLEASANT AVENUE

Owner's Name
ANN HALL

SUBSURFACE WASTEWATER DISPOSAL PLAN

SCALE 1" = 20 FT.

**NOTE : RAISE INTERNAL PLUMBING, IF NECESSARY
AND SET NEW SEPTIC TANK AT HIGH ENOUGH
ELEVATION TO ASSURE GRAVITY FLOW OR
PROVIDE PUMP STATION**

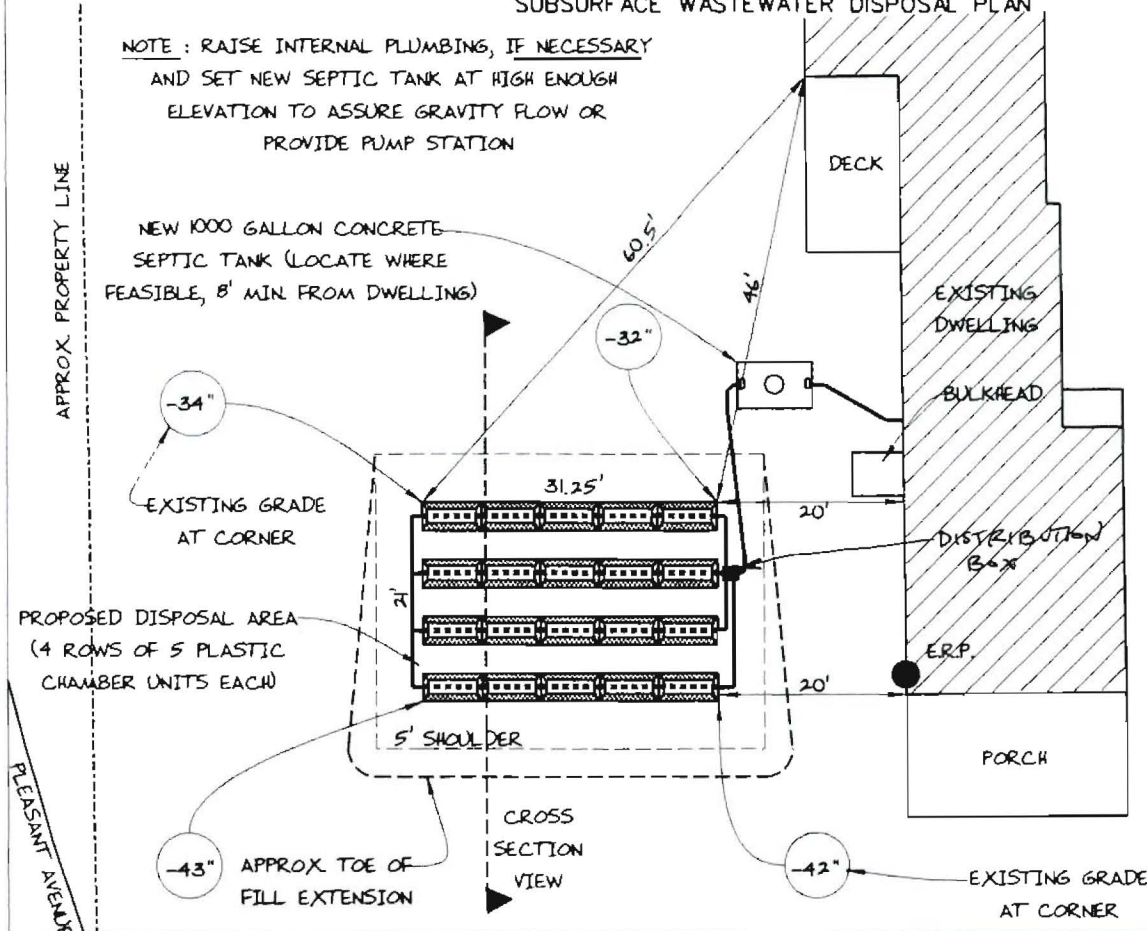

FILL REQUIREMENTS

Depth of Fill (Upslope) : 0"
Depth of Fill (Downslope) : 6"-7"
DEPTHS AT CROSS-SECTION (shown below)

CONSTRUCTION ELEVATIONS

Finished Grade Elevation
Top of Distribution Pipe or Proprietary Device
Bottom of Disposal Area


SEE
DETAIL
BELOW

ELEVATION REFERENCE POINT

Location & Description BOTTOM OF SIDING,
23" ABOVE GRADE AT FOUNDATION
Reference Elevation is: 0.0" or -----

DISPOSAL AREA CROSS SECTION

SCALE:
VERTICAL: 1" = 5'
HORIZONTAL: 1" = 10'

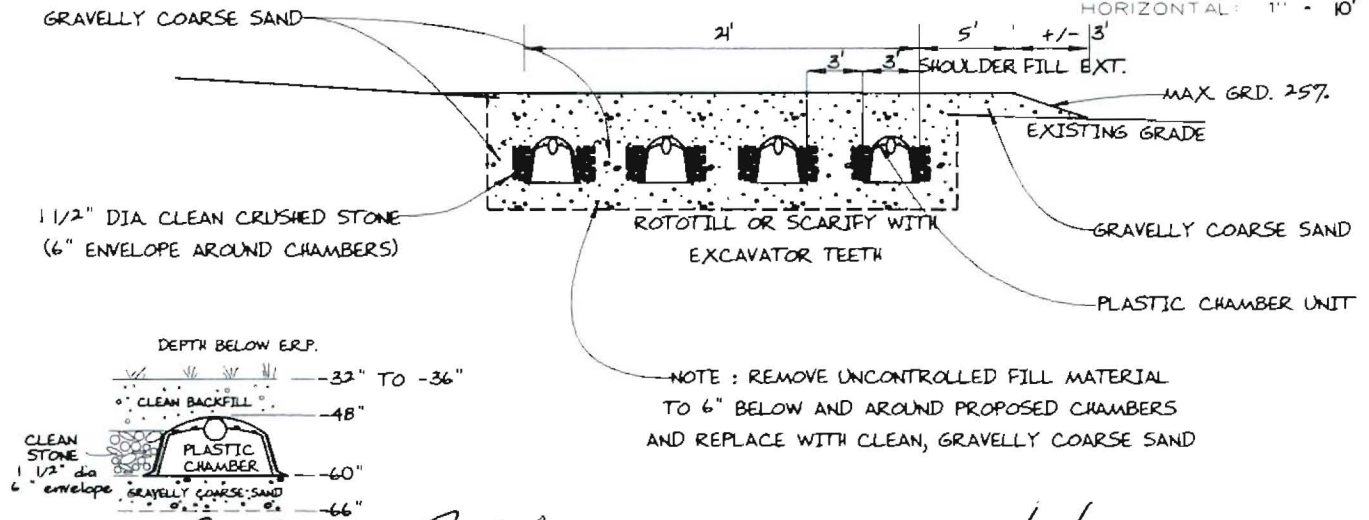

**NOTE : REMOVE UNCONTROLLED FILL MATERIAL
TO 6" BELOW AND AROUND PROPOSED CHAMBERS
AND REPLACE WITH CLEAN, GRAVELLY COARSE SAND**

Albert Frick
Site Evaluator Signature

163
SE

12/6/2010
Date

Page 3 of 3
HHE-200 Rev. 10/02



Albert Frick Associates, Inc.

Soil Scientists & Site Evaluators

95A County Road Gorham, Maine 04038
(207) 839-5563

PORTLAND (PEAKS ISLAND)

317 PLEASANT AVENUE

ANN HALL

TOWN

LOCATION

APPLICANT'S NAME

1) The Plumbing and Subsurface Wastewater Disposal Rules adopted by the State of Maine, Department of Human Services pursuant to 22 M.R.S.A. § 42 (the "Rules") are incorporated herein by reference and made a part of this application and shall be consulted by the owner/applicant, the system installer and/or building contractor for further construction details and material specifications. The system Installer should contact Albert Frick Associates, Inc. 839-5563, if there are any questions concerning materials, procedures or designs. The system installer and/or building contractor installing the system shall be solely responsible for compliance with the Rules and with all state and municipal laws and ordinances pertaining to the permitting, inspection and construction of subsurface wastewater disposal systems.

2) This application is intended to represent facts pertinent to the Rules only. It shall be the responsibility of the owner/applicant, system Installer and/or building contractor to determine compliance with and to obtain permits under all applicable local, state and/or federal laws and regulations (including, without limitation, Natural Resources Protection Act, wetland regulations, zoning ordinances, subdivision regulations, Site Location of Development Act and minimum lot size laws) before installing this system or considering the property on which the system is to be installed a "buildable" lot. It is recommended that a wetland scientist be consulted regarding wetland regulations. Prior to the commencement of construction/installation, the local plumbing inspector or Code Enforcement Officer shall inform the owner/applicant and Albert Frick Associates, Inc of any local ordinances which are more restrictive than the Rules in order that the design may be amended. All designs are subject to review by local, state and/or federal authorities. Albert Frick Associates, Inc.'s liability shall be limited to revisions required by regulatory agencies pursuant to laws or regulations in effect at the time of preparation of this application.

3) All information shown on this application relating to property lines, well locations, subsurface structures and underground facilities (such as utility lines, drains, septic systems, water lines, etc.) are based solely upon information provided by the owner/applicant and has been relied upon by Albert Frick Associates, Inc. in preparing this application. The owner/applicant shall review this application prior to the start of construction and confirm this information. Well locations on abutting properties but not readily visible above grade should be confirmed by the owner/applicant prior to system installation to assure minimum setbacks.

4) Installation of a garbage (grinder) disposal is not recommended. If one is installed, an additional 1000 gallon septic tank or a septic tank filter shall be connected in series to the proposed septic tank. Risers and covers should be installed over the septic tank outlet to allow for easy maintenance.

5) The system user shall avoid introducing kitchen grease or fats into this system. Chemicals such as septic tank cleaners and/or chlorine (such as from water treatment units) and controlled or hazardous substances shall not be disposed of in this system. Additives such as yeast or enzymes are discouraged, since they have not been proven to extend system life.

6) The septic tank should be pumped within two years of installation and subsequently as recommended by the pump service, but in no event should the septic tank be pumped less often than every three years. All septic tanks, pump stations and additional treatment tanks shall be installed to prevent ground water and surface water infiltration. Risers and covers should be properly installed to provide access while preventing surface water intrusion.

PORTLAND (PEAKS ISLAND)

37 PLEASANT AVENUE

ANN HALL

TOWN

LOCATION

APPLICANT'S NAME

- 7) The actual water flow or number of bedrooms shall not exceed the design criteria indicated on this application without a re-evaluation of the system as proposed. If the system is supplied by public water or a private service with a water meter, the water consumption per period should be divided by the number of days to calculate the average daily water consumption [water usage (cu. ft.) x 7.48 cu. ft. (gallons per cu. ft.) ÷ (# of days in period) = gals per day].
- 8) The general minimum setbacks between a well and septic system serving a single family residence is 100-300 feet, unless the local municipality has a more stringent requirement. A well installed by an abutter within the minimum setback distances prior to the issuance of a permit for the proposed disposal system may void this design.
- 9) When a gravity system is proposed: BEFORE CONSTRUCTION/INSTALLATION BEGINS, the system installer or building contractor shall review the elevations of all points given in this application and the elevation of the existing and/or proposed building drain and septic tank inverts for compatibility to minimum slope requirement. In gravity systems, the invert of the septic tank(s) outlet(s) shall be at least 4 inches above the invert of the distribution box outlet at the disposal area.
- 10) When an effluent pump is required: Provisions shall be made to make certain that surface and ground water does not enter the septic tank or pump station, by sealing/grouting all seams and connections, and by placement of a riser and lid at or above grade. An alarm device warning of a pump failure shall be installed. Also, when pumping is required of a chamber system, install a "T" connection in the distribution box and place 3 inches of stone or a splash plate in the first chamber. Insulate gravity pipes, pump lines and the distribution box as necessary to prevent freezing.
- 11) On all systems, remove the vegetation, organic duff and old fill material from under the disposal area and any fill extension. On sites where the proposed system is to be installed in natural soil, scarify the bottom and sides of the excavated disposal area with a rake. Do not use wheeled equipment on the scarified soil surface. For systems installed in fill, scarify the native soil by roto-tilling or scarifying with teeth of backhoe to a depth of at least 8 inches over the entire disposal and fill extension area to prevent glazing and to promote fill bonding. Place fill in loose layers no deeper than 8 inches and compact before placing more fill (this ensures that voids and loose pockets are eliminated to minimize the chance of leakage or differential setting). Do not use wheeled equipment on the scarified soil area until after 12 inches of fill is in place. Keep equipment off proprietary devices. Divert the surface water away from the disposal area by ditching or shallow landscape swales.
- 12) Unless noted otherwise, fill shall be gravelly coarse sand which contains no more than 5% fines (silt and clay). Crushed stone shall be clean and free of any rock dust from the crushing process.
- 13) Do not install systems on loamy, silty, or clayey soils during wet periods since soil smearing/glazing may seal off the soil interface.
- 14) Seed all filled and disturbed surfaces with perennial grass seed, then mulch with hay or equivalent material to prevent erosion. Alternatively, bark or permanent landscape mulch may be used to cover system. Woody trees or shrubs are not permitted on the disposal area or fill extensions.
- 15) If an advanced wastewater treatment unit is part of the design, the system shall be operated and maintained per manufacturer's specifications.



Albert Frick Associates, Inc.
Soil Scientists & Site Evaluators

95A County Road Gorham, Maine 04038
(207) 839-5565

BUILDING PERMIT INSPECTION PROCEDURES

**Please call 874-8703 or 874-8693 (ONLY)
or email: buildinginspections@portlandmaine.gov**

With the issuance of this permit, the owner, builder or their designee is required to provide adequate notice to the City of Portland Inspection Services for the following inspections. Appointments must be requested 48 to 72 hours in advance of the required inspection. The inspection date will need to be confirmed by this office.

- **Please read the conditions of approval that is attached to this permit!! Contact this office if you have any questions.**
- **Permits expire in 6 months, if the project is not started or ceases for 6 months.**
- **If the inspection requirements are not followed as stated below additional fees may be incurred due to the issuance of a “Stop Work Order” and subsequent release to continue with construction.**

 X **Septic field and extension inspection for bottom preparation/scarification to verify removal of vegetation, established transitional horizon and erosion and sedimentation control measures.**

 X **Exposed septic field installation and tank location inspection to check elevations, dimensions, piping, pumping station and system design prior to covering.**

 X **Backfill inspection of septic field for approved materials, stabilization, slopes and extensions**

The project cannot move to the next phase prior to the required inspection and approval to continue, REGARDLESS OF THE NOTICE OR CIRCUMSTANCES.

IF THE PERMIT REQUIRES A CERTIFICATE OF OCCUPANCY, IT MUST BE PAID FOR AND ISSUED TO THE OWNER OR DESIGNEE BEFORE THE SPACE MAY BE OCCUPIED.



CITY OF PORTLAND, MAINE

Department of Building Inspections

Original Receipt

Dec. 6 2010

Received from Lincoln Park Condominiums

Location of Work 317 Portland Ave

Cost of Construction \$ _____ Building Fee: _____

Permit Fee \$ _____ Site Fee: _____

Certificate of Occupancy Fee: _____

Total: 110.00

Building (IL) _____ Plumbing (I5) Electrical (I2) _____ Site Plan (U2) _____

Other _____

CBL: 0921001

Check #: 21266 Total Collected \$ 110.00

**No work is to be started until permit issued.
Please keep original receipt for your records.**

Taken by: Hayle

WHITE - Applicant's Copy
YELLOW - Office Copy
PINK - Permit Copy