

DISPLAY THIS CARD ON PRINCIPAL FRONTAGE OF WORK



CITY OF PORTLAND

BUILDING PERMIT

This is to certify that JAMES H HARRISON

Located At 2 BIRCHWOOD AVE

Job ID: 2011-09-2166-SUBSRF

CBL: 105- K-025-001

has permission to: Install Replacement Subsurface System

provided that the person or persons, firm or corporation accepting this permit shall comply with all of the provisions of the Statues of Maine and of the Ordinances of the City of Portland regulating the construction, maintenance and use of the buildings and structures, and of the application on file in the department.

Notification of inspection and written permission procured before this building or part thereof is lathed or otherwise closed-in. 48 HOUR NOTICE IS REQUIRED.

A final inspection must be completed by owner before this building or part thereof is occupied. If a certificate of occupancy is required, it must be

Fire Prevention Officer

Code Enforcement Officer / Plan Reviewer

12/7/2011

THIS CARD MUST BE POSTED ON THE STREET SIDE OF THE PROPERTY

PENALTY FOR REMOVING THIS CARD

BUILDING PERMIT INSPECTION PROCEDURES

Please call 874-8703 or 874-8693 (ONLY)

or email: buildinginspections@portlandmaine.gov

With the issuance of this permit, the owner, builder or their designee is required to provide adequate notice to the city of Portland Inspections Services for the following inspections. Appointments must be requested 48 to 72 hours in advance of the required inspection. The inspection date will need to be confirmed by this office.

- **Please read the conditions of approval that is attached to this permit!! Contact this office if you have any questions.**
- **Permits expire in 6 months. If the project is not started or ceases for 6 months.**
- **If the inspection requirements are not followed as stated below additional fees may be incurred due to the issuance of a "Stop Work Order" and subsequent release to continue.**

Required Inspections:

1. Septic field and extension inspection for bottom preparation/ scarification to verify removal of vegetation, established transitional horizon and erosion and sedimentation control measures.
2. Backfill inspection of septic field for approved materials, stabilization, slopes and extensions.
3. Exposed septic field installation and tank location inspection to check elevations, dimensions, piping, plumbing station and system design prior to covering.

The project cannot move to the next phase prior to the required inspection and approval to continue, REGARDLESS OF THE NOTICE OF CIRCUMSTANCES.

IF THE PERMIT REQUIRES A CERTIFICATE OF OCCUPANCY, IT MUST BE PAID FOR AND ISSUED TO THE OWNER OR DESIGNEE BEFORE THE SPACE MAY BE OCCUPIED.



PORTLAND MAINE

Strengthening a Remarkable City, Building a Community for Life • www.portlandmaine.gov

Director of Planning and Urban Development
Penny St. Louis

Job ID: 2011-09-2166-SUBSRF

Located At: 2 BIRCHWOOD AVE CBL: 105- K-025-001

Conditions of Approval:

Building


1. Application approval based upon information provided by applicant. Any deviation from approved plans requires separate review and approval prior to work.
2. Separate permits are required for any electrical, plumbing, sprinkler, fire alarm, HVAC systems, heating appliances, including pellet/wood stoves, commercial hood exhaust systems and fuel tanks. Separate plans may need to be submitted for approval as a part of this process.

117135

2011 3681

SUBSURFACE WASTEWATER DISPOSAL SYSTEM APPLICATION

Maine Dept. Health & Human Services
Div of Environmental Health, 11 SHS
(207) 287-5672 FAX (207) 287-3165

PROPERTY LOCATION		>>CAUTION: LPI APPROVAL REQUIRED<<	
City, Town, or Plantation	PORTLAND, LITTLE DIAMOND ISLAND	Town/City	Portland
Street or Road	2 BIRCHWOOD AVENUE	Permit #	
Subdivision, Lot #		Date Permit Issued	12/2/11
OWNER/APPLICANT INFORMATION		Fee \$	
Name (last, first, MI)	HARRISON JAMES	Double Fee Charged []	
	<input checked="" type="checkbox"/> Owner <input type="checkbox"/> Applicant	LPI #	1112
Mailing Address of Owner/Applicant	36 STONYBROOK ROAD CAPE ELIZABETH, ME 04107	Local Plumbing Inspector Signature	
Daytime Tel. #	450-4013	The Subsurface Wastewater Disposal System <i>shall not</i> be installed until a Permit is issued by the Local Plumbing Inspector. The Permit shall authorize the owner or installer to install the disposal system in accordance with this application and the Maine Subsurface Wastewater Disposal Rules.	
OWNER OR APPLICANT STATEMENT		CAUTION: INSPECTION REQUIRED	
I state and acknowledge that the information submitted is correct to the best of my knowledge and understand that any falsification is reason for the Department and/or Local Plumbing Inspector to deny a permit.		I have inspected the installation authorized above and found it to be in compliance with the Subsurface Wastewater Disposal Rules Application.	
Signature of Owner/Applicant: 		Local Plumbing Inspector Signature: _____	
Date: 12/6/11		(1st) Date Approved: _____	
		(2nd) Date Approved: _____	

PERMIT INFORMATION

TYPE OF APPLICATION	THIS APPLICATION REQUIRES	DISPOSAL SYSTEM COMPONENTS
<input type="checkbox"/> 1. First Time System <input checked="" type="checkbox"/> 2. Replacement System Type Replaced: TRENCH Year Installed: PRE 1974 <input type="checkbox"/> 3. Expanded System <input type="checkbox"/> a. <25% Expansion <input type="checkbox"/> b. >25% Expansion <input type="checkbox"/> 4. Experimental System <input type="checkbox"/> 5. Seasonal Conversion	<input checked="" type="checkbox"/> 1.No Rule Variance <input type="checkbox"/> 2.First Time System Variance <input type="checkbox"/> a. Local Plumbing Inspector Approval <input type="checkbox"/> b. State & Local Plumbing Inspector Approval <input type="checkbox"/> 3.Replacement System Variance <input type="checkbox"/> a. Local Plumbing Inspector Approval <input type="checkbox"/> b. State & Local Plumbing Inspector Approval <input type="checkbox"/> 4.Minimum Lot Size Variance <input type="checkbox"/> 5.Seasonal Conversion Permit	<input checked="" type="checkbox"/> 1. Complete Non-Engineered System <input type="checkbox"/> 2. Primitive System(graywater & alt toilet) <input type="checkbox"/> 3. Alternative Toilet, specify: <input type="checkbox"/> 4. Non-Engineered Treatment Tank (only) <input type="checkbox"/> 5. Holding Tank, _____ gallons <input type="checkbox"/> 6. Non-Engineered Disposal Field (only) <input type="checkbox"/> 7. Separated Laundry System <input type="checkbox"/> 8. Complete Engineered System(2000gpd+) <input type="checkbox"/> 9. Engineered Treatment Tank (only) <input type="checkbox"/> 10. Engineered Disposal Field (only) <input type="checkbox"/> 11. Pre-treatment, specify: <input type="checkbox"/> 12. Miscellaneous components
SIZE OF PROPERTY	DISPOSAL SYSTEM TO SERVE	TYPE OF WATER SUPPLY
35,250 SQ. FT. +- <input checked="" type="checkbox"/> SQ. FT. <input type="checkbox"/> ACRES	<input checked="" type="checkbox"/> 1. Single Family Dwelling Unit, No. of Bedrooms: 4 <input type="checkbox"/> 2. Multiple Family Dwelling, No of Units: _____ <input type="checkbox"/> 3. Other: _____ (specify)	<input type="checkbox"/> 1. Drilled Well <input type="checkbox"/> 2. Dug Well <input type="checkbox"/> 3. Private <input checked="" type="checkbox"/> 4. Public <input type="checkbox"/> 5. Other:
SHORELAND ZONING	Current Use <input checked="" type="checkbox"/> Seasonal <input type="checkbox"/> Year Round <input type="checkbox"/> Undeveloped	
<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No		

DESIGN DETAILS (SYSTEM LAYOUT SHOWN ON PAGE 3)

TREATMENT TANK	DISPOSAL FIELD TYPE & SIZE	GARBAGE DISPOSAL UNIT	DESIGN FLOW
<input checked="" type="checkbox"/> 1. Concrete <input checked="" type="checkbox"/> a. Regular <input checked="" type="checkbox"/> b. Low Profile <input checked="" type="checkbox"/> 2. Plastic <input type="checkbox"/> 3. Other: _____ CAPACITY: 1000 GAL	<input type="checkbox"/> 1. Stone Bed <input type="checkbox"/> 2. Stone Trench <input checked="" type="checkbox"/> 3. Proprietary Device <input type="checkbox"/> a. Cluster array <input checked="" type="checkbox"/> c.Linear <input checked="" type="checkbox"/> b. Regular <input type="checkbox"/> d. H-20 loaded <input type="checkbox"/> 4. Other: _____ SIZE: 1296 sq. ft. <input type="checkbox"/> lin. ft. 27 ELJEN IN DRAIN UNITS	<input checked="" type="checkbox"/> 1. No <input type="checkbox"/> 2. Yes <input type="checkbox"/> 3. Maybe If Yes or Maybe, specify one below: <input type="checkbox"/> a. Multi-compartment tank <input type="checkbox"/> b. _____ tanks in series <input type="checkbox"/> c. Increase in tank capacity <input type="checkbox"/> d. Filter on tank outlet	360 gallons per day BASED ON: <input checked="" type="checkbox"/> 1. Table 4A (dwelling unit(s)) <input type="checkbox"/> 2. Table 4C (other facilities) SHOW CALCULATIONS for other facilities EXISTING 3 BEDROOM EXPANDING TO 4 BEDROOMS AT 90 GALLONS PER DAY EACH
SOIL DATA & DESIGN CLASS	DISPOSAL FIELD SIZING	EFFLUENT/EJECTOR PUMP	LATITUDE AND LONGITUDE
PROFILE CONDITION 2 A at Observation Hole # TP 1 Depth 42" of Most Limiting Soil Factor	<input type="checkbox"/> 1. Medium - 2.6 sq. ft./gpd <input checked="" type="checkbox"/> 2. Medium-Large - 3.3 sq. ft./gpd <input type="checkbox"/> 3. Large - 4.1 sq. ft./gpd <input type="checkbox"/> 4. Extra-Large - 5.0 sq. ft./gpd	SEE SEPTIC NOTE ON PAGE 3 <input type="checkbox"/> 1. Not required <input checked="" type="checkbox"/> 2. May be required <input type="checkbox"/> 3. Required Specify only for engineered systems: DOSE: _____ gallons	<input type="checkbox"/> 3. Section 4G (meter readings) ATTACH WATER-METER DATA Lat. 43 d 39 m 55 s Lon. 70 d 12 m 37 s if g.p.s., state margin of error

SITE EVALUATOR STATEMENT

I Certify that on 11/21/11 (date) I completed a site evaluation on this property and state that the data reported is accurate and that the proposed system is in compliance with the Subsurface Wastewater Disposal Rules (10-144A CMR 241).

Site Evaluator Signature

SE # 63

Date 12/2/2011

ALBERT FRICK
Site Evaluator Name Printed

(207) 839-5563
Telephone Number

ALBERT@ALBERTFRICK.COM
E-mail Address

SUBSURFACE WASTEWATER DISPOSAL SYSTEM APPLICATION

Maine Department of Human Services
Division of Health Engineering, Station 10 SHS
(207) 287-5672 FAX (207) 287-4172



SOIL DESCRIPTION AND CLASSIFICATION (Location of Observation Holes Shown Above)

Observation Hole TP 1 Test Pit Boring
" Depth of Organic Horizon Above Mineral Soil

DEPTH BELOW MINERAL SOIL SURFACE (inches)	Texture	Consistency	Color	Mottling
0			BROWN	
10				
20	SANDY LOAM	FRIABLE	LIGHT YELLOWISH BROWN	
30				
40				
50	BEDROCK			

Observation Hole _____ Test Pit Boring
" Depth of Organic Horizon Above Mineral Soil

DEPTH BELOW MINERAL SOIL SURFACE (inches)	Texture	Consistency	Color	Mottling
0				
10				
20				
30				
40				
50				

TBA = 36" TO BEDROCK
TBB = 36" TO BEDROCK
TBC = 35" TO BEDROCK
TBD = 32" + TO BEDROCK

Soil Classification: 2 Profile A Condition
Slope: _____ %
Limiting Factor: 42"
 Ground Water
 Restrictive Layer
 Bedrock
 Pit Depth

Soil Classification: _____ Profile _____ Condition
Slope: _____ %
Limiting Factor: _____
 Ground Water
 Restrictive Layer
 Bedrock
 Pit Depth

Albert Frick
Site Evaluator Signature

163
SE *


12/2/2016
Date Page 2 of 3

HHE-200 Rev. 10/02

SUBSURFACE WASTEWATER DISPOSAL SYSTEM APPLICATION

Maine Department of Human Services
Division of Health Engineering, Station 10, SHS
(207) 287-5672 FAX (207) 287-4172

Town, City, Plantation: **PORTLAND, LITTLE DIAMOND ISLAND**
Street, Road, Subdivision: **2 BIRCHWOOD AVENUE**
Owner's Name: **JAMES HARRISON**

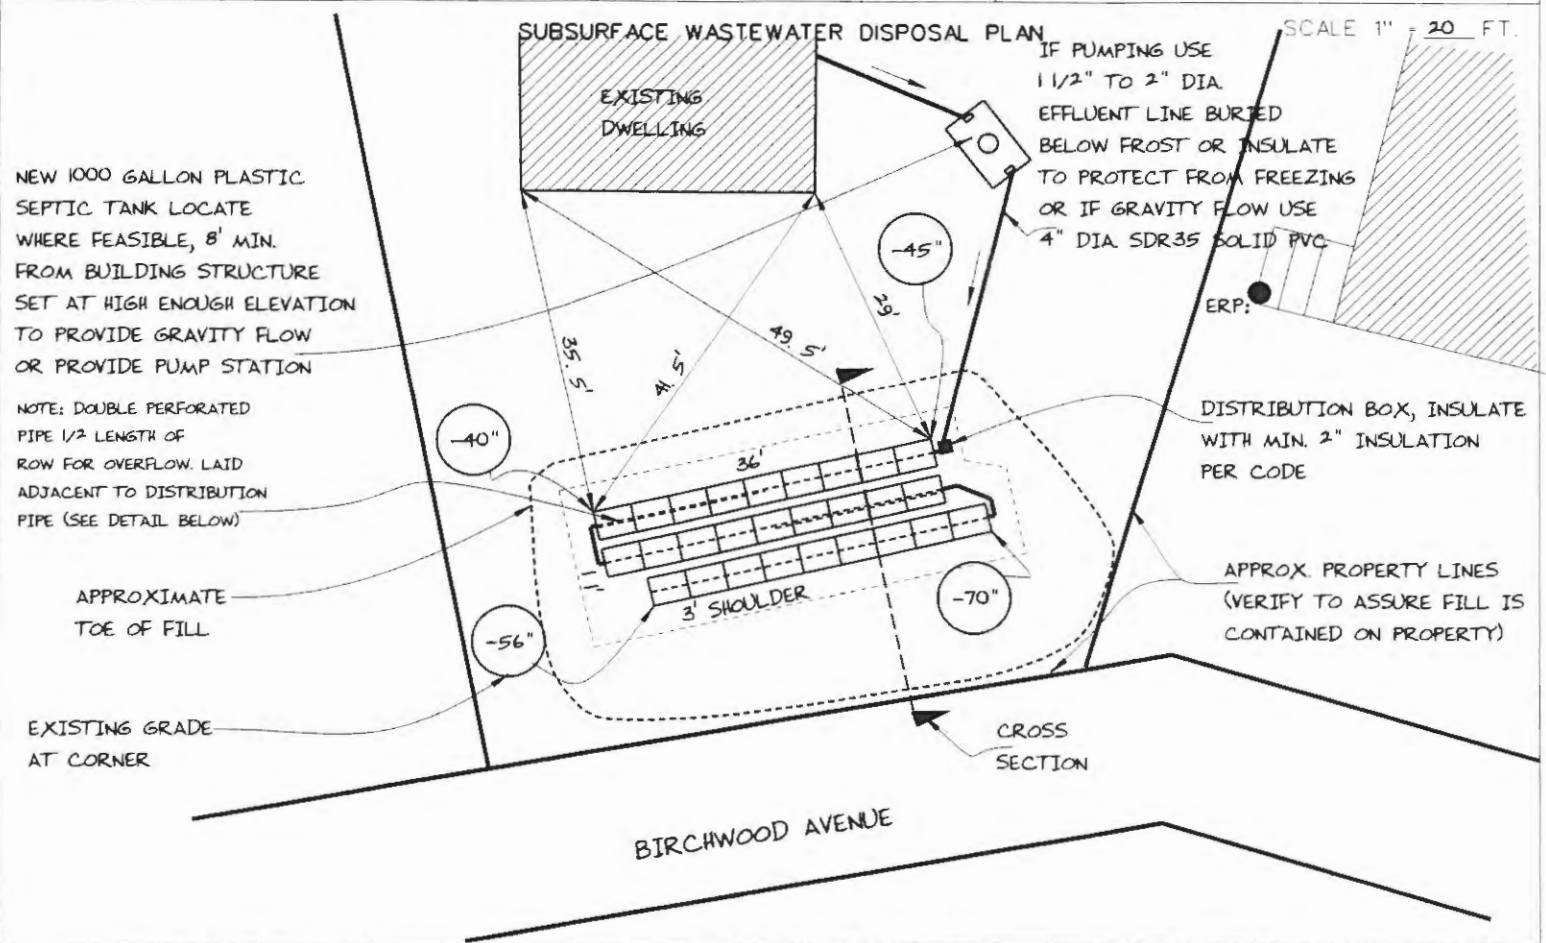

FILL REQUIREMENTS

Depth of Fill (Upslope) = 7" - 14"
Depth of Fill (Downslope) = 13" - 27"
DEPTHS AT CROSS-SECTION (shown below)

CONSTRUCTION ELEVATIONS

Finished Grade Elevation
Top of Distribution Pipe or Proprietary Device
Bottom of Disposal Area


SEE
DETAIL
BELOW

ELEVATION REFERENCE POINT

Location & Description TOP OF FIRST STEP ON NEIGHBOR'S PORCH
Reference Elevation is: 0.0" or ----

DISPOSAL AREA CROSS SECTION


SCALE:
VERTICAL: 1" = 5 FT
HORIZONTAL: 1" = 10 FT

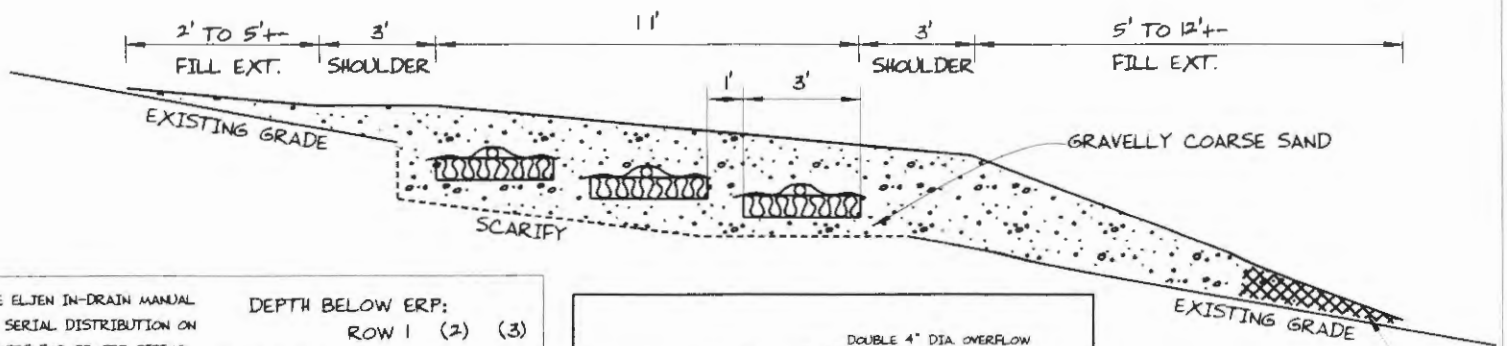

SEE ELJEN IN-DRAIN MANUAL ON SERIAL DISTRIBUTION ON SLOPES FOR PROPER PIPING

DEPTH BELOW ERP:

	ROW 1 (2)	(3)
CLEAN FILL	-3"	-37" -43"
GEOTEXTILE FABRIC OVER 4" DIA. PERF. PIPE	-4"	-47" -53"
ELJEN IN-DRAIN UNIT	-45"	-51" -57"
	-52"	-58" -64"
	-58"	-64" -70"

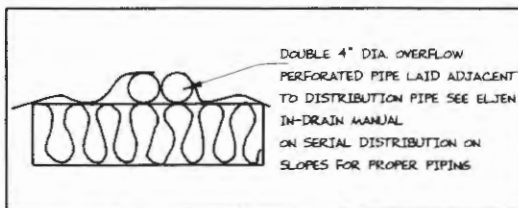

CAP TOE OF FILL WITH SANDY LOAM MATERIAL TO PREVENT WASTEWATER BREAKOUT

Albert Frick
Site Evaluator Signature

163
SE "

12/2/2011
Date

Page 3 of 3
HHE-200 Rev. 10/02



Albert Frick Associates, Inc.

Soil Scientists & Site Evaluators

95A County Road Gorham, Maine 04038

(207) 839-5563

PORTLAND, LITTLE DIAMOND ISLAND

2 BIRCHWOOD AVENUE

JAMES HARRISON

TOWN

LOCATION

APPLICANT'S NAME

1) The Plumbing and Subsurface Wastewater Disposal Rules adopted by the State of Maine, Division of Health and Human Services pursuant to 22 M.R.S.A. § 42 (the "Rules") are incorporated herein by reference and made a part of this application and shall be consulted by the owner/applicant, the system installer and/or building contractor for further construction details and material specifications. The system Installer should contact Albert Frick Associates, Inc. 839-5563, if there are any questions concerning materials, procedures or designs. The system installer and/or building contractor installing the system shall be solely responsible for compliance with the Rules and with all state and municipal laws and ordinances pertaining to the permitting, inspection and construction of subsurface wastewater disposal systems.

2) This application is intended to represent facts pertinent to the Rules only. It shall be the responsibility of the owner/applicant, system Installer and/or building contractor to determine compliance with and to obtain permits under all applicable local, state and/or federal laws and regulations (including, without limitation, Natural Resources Protection Act, wetland regulations, zoning ordinances, subdivision regulations, Site Location of Development Act and Minimum Lot Size law) before installing this system or considering the property on which the system is to be installed a "buildable" lot. It is recommended that a wetland scientist be consulted regarding wetland regulations. Prior to the commencement of construction/installation, the local plumbing inspector or Code Enforcement Officer shall inform the owner/applicant and Albert Frick Associates, Inc of any local ordinances which are more restrictive than the Rules in order that the design may be amended. All designs are subject to review by local, state and/or federal authorities. Albert Frick Associates, Inc.'s liability shall be limited to revisions required by regulatory agencies pursuant to laws or regulations in effect at the time of preparation of this application.

3) All information shown on this application relating to property lines, well locations, subsurface structures and underground facilities (such as utility lines, drains, septic systems, water lines, etc.) are based upon information provided by the owner/applicant and has been relied upon by Albert Frick Associates, Inc. in preparing this application. The owner/applicant shall review this application prior to the start of construction and confirm this information. Well locations on abutting properties but not readily visible above grade should be confirmed by the owner/applicant prior to system installation to assure minimum setbacks.

4) Installation of a garbage (grinder) disposal is not recommended. If one is installed, an additional 1000 gallon septic tank or a septic tank filter shall be connected in series to the proposed septic tank. Risers and covers should be installed over the septic tank outlet per the "Rules" to allow for easy maintenance of filter.

5) The septic tank should be pumped within two years of installation and subsequently as recommended by the pump service, but in no event should the septic tank be pumped less often than every three years.

The system user shall avoid introducing kitchen grease or fats into this system. Chemicals such as septic tank cleaners and/or chlorine (such as from water treatment units) and controlled or hazardous substances shall not be disposed of in this system. Additives such as yeast or enzymes are discouraged, since they have not been proven to extend system life.

6) All septic tanks, pump stations and additional treatment tanks shall be installed to prevent ground water and surface water infiltration. Risers and covers should be properly installed to provide access while preventing surface water intrusion to within 6" of a finished ground surface.

Vehicular traffic over disposal system is prohibited unless specifically designed with H-20 rated components.

ATTACHMENT TO SUBSURFACE WASTEWATER DISPOSAL APPLICATION

PORTLAND, LITTLE DIAMOND ISLAND	2 BIRCHWOOD AVENUE	JAMES HARRISON
TOWN	LOCATION	APPLICANT'S NAME

7) The actual waste water flow or number of bedrooms shall not exceed the design criteria indicated on this application without a re-evaluation of the system as proposed

8) The general minimum setbacks between a well (public or private) and septic system serving a single family residence is 100-300 feet, unless the local municipality has a more stringent requirement. A well installed by an abutter within the minimum setback distances prior to the issuance of a permit for the proposed disposal system may void this design.

9) When a gravity system is proposed: BEFORE CONSTRUCTION/INSTALLATION BEGINS, the system installer or building contractor shall review the elevations of all points given in this application and the elevation of the existing and/or proposed building drain and septic tank inverts for compatibility to minimum pitch requirements. In gravity systems, the invert of the septic tank(s) outlet(s) should be at least 4 inches above the invert of the distribution box outlet at the disposal area.

10) When an effluent pump is required: Pump stations should be sized per manufacturer's specifications to meet lift requirements and friction loss. Provisions shall be made to make certain that surface and ground water does not enter the septic tank or pump station, by sealing/grouting all seams and connections, and by placement of a riser and lid at or above grade. An alarm device warning of a pump failure shall be installed. Also, when pumping is required of a chamber system, install a 'T' connection in the distribution box and place 3 inches of stone or a splash plate in the first chamber. Insulate gravity pipes, pump lines and the distribution box as necessary to prevent freezing.


11) On all systems, remove the vegetation, organic duff and old fill material from under the disposal area and any fill extension. Additional fill beyond indicated on plan may be necessary to replace organic matter. On sites where the proposed system is to be installed in natural soil, scarify the bottom and sides of the excavated disposal area with a rake. Do not use wheeled equipment on the scarified soil surface. For systems installed in fill, scarify the native soil by roto-tilling or scarifying with teeth of backhoe to a depth of at least 8 inches over the entire disposal and fill extension area to prevent glazing and to promote fill bonding. Place fill in loose layers no deeper than 8 inches and compact before placing more fill (this ensures that voids and loose pockets are eliminated to minimize the chance of leakage or differential settling). Do not use wheeled equipment on the scarified soil area until after 12 inches of fill is in place. Keep equipment off proprietary devices. Divert the surface water away from the disposal area by ditching or shallow landscape swales.

12) Unless noted otherwise, fill shall be gravelly coarse sand, which contains no more than 5% fines (silt and clay). Crushed stone shall be clean and free of any rock dust from the crushing process.

13) Do not install systems on loamy, silty, or clayey soils during wet periods since soil smearing/glazing may seal off the soil interface.

14) Seed all filled and disturbed surfaces with perennial grass seed, with 4" min. soil or soil amendment mix suitable for growing, then mulch with hay or equivalent material to prevent erosion. Alternatively, bark or permanent landscape mulch may be used to cover system. Woody trees or shrubs are not permitted on the disposal area or fill extensions.

15) If an advanced wastewater treatment unit is part of the design, the system shall be operated and maintained per manufacturer's specifications.



Albert Frick Associates, Inc.
Soil Scientists & Site Evaluators

95A County Road Gorham, Maine 04058
(207) 859-5565