

February 14, 2014

Patrick Skall, Project Manager
Wright-Ryan Construction
10 Danforth Street
Portland, ME 04101

RE:
Diversified Communications
Renovation and Tenant Improvement
121 Free Street, Portland Maine


Patrick:

Please provide the following Steel lintels at the new openings in the masonry wall called for on sheet A1.02 at the new openings for doors 207 and 201:

Steel lintel for rough openings (up to 6'-0") in brick walls are L5x3 1/2x5/16 LLV. One L for each 4" of wall thickness. 6" bearing at both ends.

Let me know if you have any questions

Josef Chalats, Architect Maine AR-2534

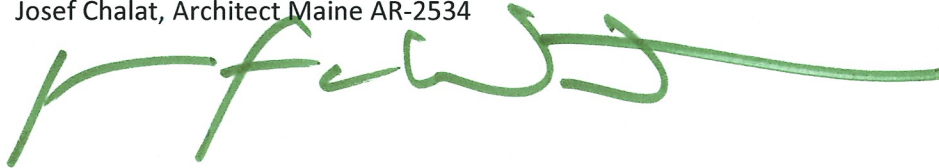

Cc:

Jeannie Bourke
Lisa Whited
Dave Tetreault
Building Inspections