


160 Veranda Street
Portland, Maine 04103
T: 207.221.2260
F: 207.221.2266
Web: www.allied-eng.com

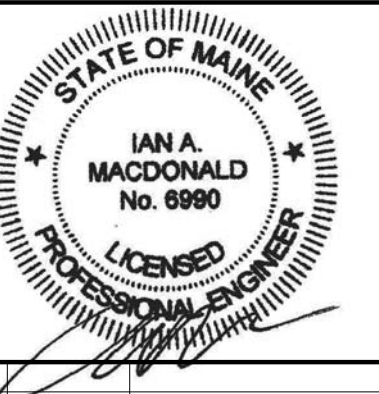

Mark	Date	Description

Project Status
ISSUED FOR CONSTRUCTION

SEPTEMBER 21, 2016

Drawing Title
**FLOOR 9
EXISTING
CONDITIONS
REMOVAL PLAN
HVAC**

Scale: 1/8" = 1'-0"

Drawing Number

M05.3

DEMOLITION - GENERAL NOTES

1. FIRST: CONFIRM LOCATIONS, DIMENSIONS, AND MODELS OF ALL EXISTING AIR TERMINALS.
2. REMOVE EXISTING AIR TERMINALS, DUCTWORK, DIFFUSERS, CONTROLS, AS REQUIRED.
3. PNEUMATIC TUBING SHALL BE CAREFULLY REMOVED BACK TO THE MAIN - IT IS CRITICAL THAT THIS IS DONE IN A MANNER TO AVOID ADDING LEAKS. IF THE TUBING ROUTING TO THE MAIN IS NOT ACCESSIBLE, CAP AT LOCATION OF REMOVED DEVICE.
4. THERMOSTATS SHALL BE SALVAGED AND GIVEN TO THE OWNER.
5. AIR TERMINALS: THE OWNER MAY WISH TO RECEIVE SALVAGE PARTS - DISCUSS WITH OWNER PRIOR TO REMOVAL FROM THE SITE.

DEMOLITION - KEY NOTES

- 1 REMOVE (E) VAV BOX AND ACCESSORIES, ADJACENT DUCTWORK, PNEUMATIC CONTROLS, AND RELATED COMPONENTS.
- 2 REMOVE (E) THERMOSTAT. SEE DEMOLITION NOTE #3.
- 3 REMOVE (E) HEAT RELIEF CEILING EXHAUST FAN AND RELATED CONTROLS.
- 4 REMOVE (E) SUPPLY DIFFUSER, LIGHT/DIFFUSER OR RETURN GRILLE, ALONG WITH THE BRANCH DUCT TO THE MAIN.
- 5 REMOVE (E) TRANSFER DUCT

AIR TERMINALS SERVING PERIMETER OFFICES TO REMAIN UNLESS OTHERWISE NOTED, (TYP)

(E) TRANSFER DUCT TO REMAIN UNLESS OTHERWISE NOTED (TYP)

