LEGEND

ALL DEVICES, FIXTURES, ETC. SHALL BE NEW UNLESS DESIGNATED WITH THE FOLLOWING TAGS:

E EXISTING TO REMAIN
ER EXISTING RELOCATED
NR NEW TO REPLACE EXISTING IN EXISTING LOCATION
R EXISTING TO BE REMOVED
RR REMOVE & RELOCATE EXISTING

SURFACE MOUNTED EMERGENCY LIGHT

CEILING RECESSED EMERGENCY LIGHT

FLUORESCENT FIXTURE - UPPERCASE LETTER IS TYPE, LOWERCASE LETTER IS SWITCH CONTROL GROUP
RECTANGLES INDICATE NUMBER FIXTURES IN A ROW - "EM" INDICATES FIXTURE CONNECTED TO EMERGENCY POWER

CEILING RECESSED FLUORESCENT FIXTURE - NOTES SAME AS ABOVE

CEILING MOUNTED FIXTURE - NOTES SAME AS ABOVE

WALL MOUNTED FIXTURE - NOTES SAME AS ABOVE

CEILING MOUNTED EXIT SIGN - ARROW INDICATES DIRECTIVE ARROW ON SIGN

WALL MOUNTED EXIT SIGN - ARROW INDICATES DIRECTIVE ARROW ON SIGN EMERGENCY LIGHTING

BATTERY PACK WITH EMERGENCY LAMPS AS SHOWN

REMOTE EMERGENCY LAMP LIGHT FIXTURES

SPST FLUSH WALL TOGGLE SWITCH - MOUNT AT 48" A.F.F. TO CENTER - LETTER INDICATES SWITCH GROUP

THREE-WAY TOGGLE SWITCH - NOTES SAME AS SPST SWITCH ABOVE

DIMMER SWITCH - NOTES SAME AS SPST SWITCH ABOVE

FOUR-WAY TOGGLE SWITCH - NOTES SAME AS SPST SWITCH ABOVE

KEY SWITCH - NOTES SAME AS ABOVE

PILOT LIGHT SWITCH - NOTES SAME AS ABOVE

VACANCY SENSOR - MANUAL ON / AUTOMATIC OFF OPERATION - NOTES SAME AS ABOVE

CEILING MOUNTED OCCUPANCY SENSOR

POWER PACK FOR LOW VOLTAGE LIGHTING CONTROL DEVICES.

PHOTO CELL

20 AMP DUPLEX CONVENIENCE RECEPTACLE - MOUNT AT 18" A.F.F. TO CENTER
UNLESS INDICATED OTHERWISE - "GFI" INDICATES GROUND FAULT DEVICE
"I" INDICATES GFI PROTECTED BY UPSTREAM DEVICE, "WP" INDICATES WEATHERPROOF
"IG" INDICATES INSULATED/ISOLATED GROUND, "C" INDICATES CEILING MOUNTED, "F" INDICATES FLOOR MOUNTED,
"WR" INDICATES WEATHER RESISTANT RATED.

20 AMP QUADRAPLEX (DOUBLE DUPLEX) - NOTES SAME AS ABOVE

SPECIAL PURPOSE OUTLET OR EQUIPMENT CONNECTION - COORDINATE LOCATION AND TYPE OF CONNECTION WITH EQUIPMENT BEING SERVED - "SIN" INDICATES ILLUMINATED SIGN

JUNCTION BOX WITH COVER

MOTOR - SIZE AS INDICATED - COORDINATE W/ ACTUAL EQUIPMENT BEING SERVED

MANUAL STARTER - COORDINATE WITH EQUIPMENT BEING SERVED SINGLE THROW

FUSED DISCONNECT SWITCH - NEMA ENCLOSURE AS REQUIRED REMOTE CONTROL

MAGNETIC STARTER - COORDINATE W/ EQUIPMENT BEING SERVED

COMBINATION FUSED DISCONNECT SWITCH / MAGNETIC STARTER - NOTES SAME AS ABOVE

GROUND

ADA ELECTRICALLY-ASSISTED DOOR OPENER PUSHBUTTON

BRANCH CIRCUIT RUN IN CEILING OR IN WALLS

LOW VOLTAGE OR CONTROL WIRING - #12 MINIMUM OR AS NOTED

MULTI-CONDUCTOR BRANCH CIRCUIT - NUMBER OF HASHMARKS IS NUMBER OF WIRES
(NOT INCLUDING GROUND WIRE) WITHOUT HASHMARKS IS TWO WIRE

HOMERUN TO CIRCUIT AND PANEL INDICATED - NUMBER OF ARROWS IS NUMBER OF PHASE WIRES -
NUMBER OF WIRES AS INDICATED ABOVE

CONTINUATION OF CIRCUIT

DIRECTIVE ARROW

PANELBOARD - SEE PANELBOARD SCHEDULE(S)

COMBINATION VOICE/DATA JACK - "J" INDICATES NUMBER OF VOICE LINES, "D" INDICATES NUMBER OF DATA LINES,
PROVIDE (1) EACH UNLESS NOTED OTHERWISE - "U" INDICATES 48" TO CENTER A.F.F.

VOICE JACK - NOTES SAME AS VOICE/DATA JACK ABOVE - "W" INDICATES WALL PHONE, (1) VOICE LINE ONLY

DATA JACK - NOTES SAME AS VOICE/DATA JACK ABOVE

WIRELESS ACCESS PORT - PROVIDE (1) DATA JACK TO RECEIVE OWNER SUPPLIED ANTENNA

TELEVISION JACK - (1) COAX LINE W/ TYPE "F" CONNECTOR - NOTES SAME AS RECEPTACLES

RECESSED FLOOR OR CEILING MOUNTED BOX - POWER & COMMUNICATIONS AS SHOWN-"F" INDICATES FLOOR MOUNTED, "C" INDICATES CEILING MOUNTED - NOTES SAME AS VOICE/DATA JACK ABOVE

WALL MOUNTED CLOCK

CEILING SPEAKER (SOUND OR INTERCOM SYSTEM AS SHOWN)

WALL SPEAKER (SOUND OR INTERCOM SYSTEM AS SHOWN)

LOUD SPEAKER

MICROPHONE

INTERCOM SYSTEM CALL STATION

INTERCOM SYSTEM CONTROL PANEL

TELEPHONE/INTERCOM SYSTEM HAND SET

CABLE TRAY

FACP FIRE ALARM SYSTEM CONTROL PANEL

FAA FIRE ALARM ANNUNCIATOR

FIRE ALARM SYSTEM CEILING MOUNTED HEAT DETECTOR

FIRE ALARM SYSTEM CEILING MOUNTED SMOKE DETECTOR

FIRE ALARM SYSTEM DUCT MOUNTED SMOKE DETECTOR

WALL MOUNTED FIRE ALARM SYSTEM MANUAL PULL STATION

FIRE ALARM SYSTEM WALL MOUNTED AUDIO/VISUAL DEVICE WITH VISUAL DEVICE CANDELA RATING AS NOTED

FIRE ALARM SYSTEM WALL MOUNTED VISUAL DEVICE ONLY - CANDELA RATING AS NOTED FIRE ALARM SYSTEM

DOOR HOLD-OPEN DEVICE CONNECTION

FIRE ALARM SYSTEM/SPRINKLER SYSTEM PRESSURE SWITCH

FIRE ALARM SYSTEM/SPRINKLER SYSTEM FLOW SWITCH

FIRE ALARM SYSTEM/SPRINKLER SYSTEM TAMPER SWITCH

SECURITY ALARM SYSTEM CONTROL PANEL

SECURITY ALARM SYSTEM CAMERA - "IP" INDICATES IP CAMERA LOCATION, ALL OTHERS SHALL BE ANALOG
CAMERA, "V" INDICATES VANDAL RESISTANT, "WP" INDICATES WEATHERPROOF

SECURITY ALARM SYSTEM MOTION DETECTOR

SECURITY ALARM SYSTEM SIREN/STROBE

ACCESS CONTROL SYSTEM CARD READER

ACCESS CONTROL POSITION SWITCH

ACCESS CONTROL SYSTEM ARMING STATION

AREA OF REFUGE CALL STATION

AREA OF REFUGE CONTROL PANEL

THERMOSTAT

LIGHT FIXTURE SCHEDULE

TYPE	DESCRIPTION	SIZE	MANUFACTURER CAT. NO.	LENS/LOUVER	LAMPS ①	BALLASTS ①	EFFICIENCY MAINE CODE	MINIMUM EFFICIENCY	WATTS PER FIXTURE	VOLT.	NOTES
A	CEILING SURFACE WRAPAROUND	1'x4'	METALUX WN-232A-UNV-HR81	PRISMATIC ACRYLIC	(2) 32W T8	PROG. START ELECTRONIC	L16	82%	56	UNV	
A1	CEILING SURFACE MODULAR	2'x4'	METALUX 2M-232A-UNV-ER81	PRISMATIC ACRYLIC	(2) 32W T8	PROG. START ELECTRONIC	L16	77%	56	UNV	
B	NOT USED	-	-	-	-	-	-	-	-	-	
C	CEILING RECESSED VOLUMETRIC	2'x4'	METALUX 2AC-232-UNV-L8835HL-HR81_DIM	FROSTED ACRYLIC	(2) 32W T8	STEP-DIM ELECTRONIC	L33	85%	56	UNV	
C1	CEILING RECESSED VOLUMETRIC	2'x4'	METALUX 2AC-232-UNV-L8835HL-HR81	FROSTED ACRYLIC	(2) 32W T8	PROG. START ELECTRONIC	L33	85%	56	UNV	
C2	CEILING RECESSED VOLUMETRIC	1'x4'	METALUX AC-132-UNV-L8835HL-HR81	FROSTED ACRYLIC	(1) 32W T8	PROG. START ELECTRONIC	L33	85%	28	UNV	
D	CEILING SURFACE STRIPLIGHT	4'L	METALUX SNF-232-UNV-HR81-WG/SNF-4FT	WIRE GUARD	(2) 32W T8	PROG. START ELECTRONIC	L16	90%	56	UNV	
E	EXISTING TO REMAIN	-	-	-	-	-	-	-	-	-	
F	CEILING RECESSED DOWNLIGHT	6"D	PRESCOLITE CFT83HEB STF802H WT LP26T35K	OPEN	(1) 26W TRIPLE	ELECTRONIC	N/A	62%	23	UNV	
G	CEILING RECESSED GASKETED TROFFER	2'x4'	METALUX 2GCR7A-232-UNV-HR81-32	PRISMATIC ACRYLIC	(3) 32W T8	ELECTRONIC	L31	85%	84	UNV	
G1	CEILING SURFACE GASKETED TROFFER	2'x4'	KENALL CSESLD4-3-32 IS 1.277 AF 2H U	PRISMATIC ACRYLIC	(3) 32W T8	ELECTRONIC	L31	85%	84	UNV	
H	CEILING RECESSED TROFFER	2'x4'	METALUX 2GR8-232A-UNV-HR81	PRISMATIC ACRYLIC	(2) 32W T8	PROG. START ELECTRONIC	L16	79%	56	UNV	
J	NOT USED	-	-	-	-	-	-	-	-	-	
K	WALL MOUNTED LINEAR FLUORESCENT	4'L	DELRAY LIGHTING SW54128421.2	FROSTED ACRYLIC	(1) 28W T5	ELECTRONIC	L16	96%	29	277	MOUNT @ 7'-0" ABOVE LANDING TO CENTER
L	CEILING RECESSED VANDAL-RESISTANT TROFFER	2'x4'	FAIL-SAFE DVRDC-232ACT1/4G-UNV-HR82	PRISMATIC ACRYLIC	(3) 32W T8	DUAL ELECTRONIC	L16	79%	84	UNV	
L1	CEILING RECESSED VANDAL-RESISTANT TROFFER	1'x4'	FAIL-SAFE DVRDC-232ACT1/4G-UNV-HR81	PRISMATIC ACRYLIC	(2) 32W T8	PROG. START ELECTRONIC	L16	66%	56	UNV	
M	EXTERIOR BUILDING MOUNTED WALL PACK	-	LUMARK XTORDA	-	-	-	S13	N/A	20	-	
N	CEILING RECESSED DOWNLIGHT - WITH DECORATIVE TRIM	6"D	PRESCOLITE CFT83HEB STF802H WT LP42T35K SH1015	GLASS RING	(1) 42W TRIPLE	ELECTRONIC	N/A	62%	46	UNV	
N1	CEILING RECESSED DOWNLIGHT	6"D	PRESCOLITE CFT83HEB STF802H WT LP42T35K	OPEN	(1) 42W TRIPLE	ELECTRONIC	N/A	62%	46	UNV	
N2	CANOPY RECESSED LENSED DOWNLIGHT	6"D	PRESCOLITE CFT83HEB STF802H WT DL LP42T35K	DIFFUSE GLASS	(1) 42W TRIPLE	ELECTRONIC	N/A	42%	46	UNV	
P	DECORATIVE WALL SCONCE	-	TECH LIGHTING 700WSESX***-VF*	WHITE GLASS	(1) 18W TWIN	SELF-BALAST	N/A	N/A	16	120	FINISH + SHADE TO BE DETERMINED BY ARCH.
Q	ELEVATOR PIT LIGHT	-	PHOENIX VPW36CFL1-26-3CI-G	GLASS GLOBE / WIRE GUARD	(1) 26W TRIPLE	ELECTRONIC	N/A	N/A	23	120	
R	EXISTING FIXTURE TO BE REMOVED	-	-	-	-	-	-	-	-	-	
S	WALL MOUNTED LINEAR VANDAL RESISTANT FLUORESCENT	4'L	FAIL-SAFE FSPC-32TA-UNV	CLEAR POLYCARB	(1) 32W T8	ELECTRONIC	L16	N/A	28	UNV	MOUNT @ 8'-0" AFF LEVEL OF STAGING TO CENTER IN LOADING DOCK AREA. MOUNT @ 8'-0" AFF OF HIGHEST POINT TO CENTER IN EVENT CONCOURSE.
S1	WALL MOUNTED LINEAR VANDAL RESISTANT FLUORESCENT	2'L	FAIL-SAFE FSMC-17A-UNV	CLEAR POLYCARB	(1) 17W T8	ELECTRONIC	L16	N/A	14	UNV	MOUNT 6" ABOVE MIRROR TO CENTER, UNO. FINISH TBD BY ARCH.
T	CEILING SURFACE INDUSTRIAL	4'L	METALUX DF-232-UNV-HR81-WG/DF4FT-U	WIRE GUARD	(2) 32W T8	PROG. START ELECTRONIC	L16	90%	56	UNV	
U	WALL MOUNTED DOCK LIGHT	-	PHOENIX DL42FL4-HDL-42-ARM-DS	OPEN	(5) 42W TRIPLE	ELECTRONIC	N/A	N/A	57	UNV	
V	CEILING SUSPENDED PENDANT	24"D	DELRAY LIGHTING 640128.2**	OPAL ACRYLIC	(1) 26W TRIPLE	ELECTRONIC	N/A	N/A	114	277	SUSPENDED TO 10'-6" AFF TO BOTTOM UNO. FINISH TBD BY ARCH
W	WALL MOUNTED VANITY LIGHT	2'L	TECH LIGHTING 700BOMETX-CF	FROSTED ACRYLIC	(1) 24W T5HO	ELECTRONIC	L16	N/A	25	120	MOUNT 6" ABOVE MIRROR TO CENTER, UNO. FINISH TBD BY ARCH.
X	CEILING MOUNTED TRACK W/ SPOT HEAD	VARIES	AMERILUX HTTK4-1-2-3/ TEK-12-2/ CYLTV 20 CM-HMR16 E WT TN2 277	OPEN	(1) 20W CMH PER HEAD	ELECTRONIC	N/A	N/A	VARIES	277	PROVIDE ALL NECESSARY ACCESSORIES REQUIRED FOR MOUNTING AND OPERATION AS INTENDED.
X1	CEILING MOUNTED TRACK W/ LINEAR HEAD	VARIES	AMERILUX HTTK4-1-2-3/ TEK-12-2/ PROF-SM 1-/-4 T5 E WT TN2 277	OPEN	(1) 14W T5 PER HEAD	ELECTRONIC	N/A	N/A	VARIES	277	PROVIDE ALL NECESSARY ACCESSORIES REQUIRED FOR MOUNTING AND OPERATION AS INTENDED.
Y	UNDER-COUNTER MOUNTED LINEAR FLUORESCENT	VARIES	JESCO LIGHTING SGSA-1-139-W	RIBBED ACRYLIC	(1) 14W T5 PER 2 FT	ELECTRONIC	L16	N/A	-	120	PROVIDE ALL ACCESSORIES REQUIRED FOR MOUNTING & OPERATION. REFER TO PLANS AND DETAIL J10/E4-01A FOR QUANTITY AND MOUNTING.
Z	CEILING RECESSED WALL WASHER	2'L	INSIGHT LIGHTING SR07/75A/W	TEMPERED GLASS	(2) 26W QUAD	ELECTRONIC	N/A	N/A	57	277	
Z1	CEILING RECESSED WALL WASHER	6"D	PRESCOLITE CFT83HEB STF802HWW WT LP26T35K	OPEN	(1) 26W TRIPLE	ELECTRONIC	N/A	70%	26	UNV	
AA	CEILING SUSPENDED PENDANT	12"D	DELRAY LIGHTING 6232.42.2.AL	OPAL ACRYLIC	(1) 42W TRIPLE	ELECTRONIC	N/A	N/A	28	277	SEE DETAIL L9/E4.22 FOR SUSPENSION DETAILS
BB	CEILING SUSPENDED PENDANT	28"D	DELRAY LIGHTING 3812440UEGD	OPAL ACRYLIC	(4) 42W TRIPLE	ELECTRONIC	N/A	85%	147	UNV	SUSPENDED TO 10'-6" AFF TO BOTTOM, UNO.
CC	WALL MOUNTED LINEAR FLUORESCENT	4'L	LUMAR LIGHTING VO132CSUPAAS	RIBBED ACRYLIC	(1) 32W T8	ELECTRONIC	L16	75%	28	UNV	MOUNT @ 7'-0" ABOVE LANDING TO CENTER, UNO.
DD	CANOPY MOUNTED SHALLOW CYLINDER	8"D	PRESCOLITE CFSCB26BEB ** STC88CL WT	CROSS BAFFLE	(2) 26W QUAD	ELECTRONIC	N/A	49%	57	277	FINISH TBD BY ARCH.
⊠ ⊠	EXIT SIGNAGE	-	SURE-LITES LPXF	RED LETTERS	LED	-	-	-	1	120/277	REFER TO PLANS FOR MOUNTING & NUMBER OF FACES

LIGHT FIXTURE SCHEDULE NOTES:

① ALL T8 LAMPS AND BALLASTS SHALL BE ELIGIBLE "SUPER T8" SYSTEMS PER EFFICIENCY MAINES "QUALIFYING HIGH PERFORMANCE T8S" TABLE.

GENERAL ELECTRICAL DEMO NOTES:

1. WIRING FOR EXISTING BRANCH CIRCUIT DEVICES TO BE DEMOLISHED SHALL BE REMOVED BACK TO THE PANELBOARD. THE ASSOCIATED CIRCUIT BREAKER SHALL BE TURNED OFF AND MARKED AS SPARE IN THE PANELBOARD DIRECTORY. DO NOT ABANDON BRANCH CIRCUIT WIRING ABOVE CEILINGS OR IN WIREWAYS.
2. ALL EXPOSED RACEWAYS & CABLES IN FINISHED SPACES, NO LONGER IN USE, SHALL BE REMOVED.
3. MAINTAIN, OR RESTORE IF INTERRUPTED BY REMOVALS OR IN PATH OF NEW CONSTRUCTION, ALL CONDUITS, BRANCH CIRCUITS, AND FEEDERS PASSING THROUGH AND SERVING UNDISTURBED AREA (SHOWN OR NOT SHOWN).
4. ALL EXISTING CONDUITS STUBBED THROUGH FLOOR OR ROOF SERVING ITEMS TO BE REMOVED (SHOWN OR NOT SHOWN) AND NOT REQUIRED TO BE RELISED SHALL BE CUT OFF FLUSH WITH THE SLAB OR ROOF DECK AND CAPPED.
5. IN ANY AREA REQUIRING THE PERFORMANCE OF ANY TRADES WORK, THIS CONTRACTOR SHALL CAREFULLY REMOVE AND STORE ANY ELECTRICAL ITEMS IN THE PATH OF WORK, REINSTALLING AND RECONNECTING SAME AS REQUIRED IN ACCORDANCE WITH THE PLANS AND/OR AS DIRECTED AFTER COMPLETION OF OTHER TRADES WORK IN THAT AREA.
6. INVENTORY MAJOR ELECTRICAL ITEMS THAT ARE REMOVED, AND PROVIDE A LIST TO THE OWNER FOR THEIR SELECTION OF ITEMS TO BE RETAINED. ALL ITEMS REJECTED BY THE OWNER SHALL BECOME THE PROPERTY OF THE ELECTRICAL CONTRACTOR AND SHALL BE REMOVED FROM THE SITE.
7. CONTRACTOR SHALL TAKE CARE IN DEMOLITION OF CONCRETE SLABS. THE OWNER HAS INDICATED THAT LINE & LOW VOLTAGE CONDUCTORS WERE INSTALLED WITHIN THE SLABS DURING PREVIOUS CONSTRUCTION PROJECT(S).

GENERAL ELECTRICAL NOTES:

1. ALL WORK SHALL BE INSTALLED IN A NEAT AND WORKMAN LIKE MANNER. RECTILINEAR TO BUILDING STRUCTURE, AND IN ACCORDANCE WITH ALL APPLICABLE CODES, INCLUDING, BUT NOT LIMITED TO NFPA 70, 90A, 101, 110, AND DIRECTION OF AUTHORITY HAVING JURISDICTION.
2. EXACT LOCATION OF MECHANICAL EQUIPMENT THAT REQUIRES ELECTRICAL CONNECTION IS SHOWN ON THE MECHANICAL DRAWINGS.
3. CONTRACTOR SHALL REVIEW ALL TRADES CONTRACT DOCUMENTS, AND FIELD VERIFY, TO DETERMINE SPECIFIC MOUNTING LOCATIONS FOR ELECTRICAL EQUIPMENT AND CONDUIT.
4. COORDINATE ARRANGEMENT, MOUNTING, AND SUPPORT OF ELECTRICAL CONDUIT AND EQUIPMENT TO PROVIDE FOR EASE OF DISCONNECTING THE EQUIPMENT WITH MINIMUM INTERFERENCE TO OTHER INSTALLATIONS; TO ALLOW FREIGHT OR AIR MAY FOR PIPING INSTALLED AT A REQUIRED SLOPE; AND SO CONNECTING RACEWAYS WILL BE CLEAR OF OBSTRUCTIONS AND OF THE WORKING AND ACCESS SPACE OF OTHER EQUIPMENT.
5. ALL PENETRATIONS OF RATED CEILINGS, WALLS AND PARTITIONS SHALL BE SEALED WITH A U.L., LISTED AND APPROVED FIRE SEALANT MATERIAL TO MAINTAIN RATING OF THE SEPARATION.
6. DEVICES SHALL NOT BE INSTALLED BACK-TO-BACK IN ADJACENT ROOMS, ADJUST LOCATIONS AS NECESSARY TO AVOID THIS CONDITION. DEVICES MAY BE INSTALLED WITHING THE SAME STUD CAVITY.
7. WHERE TV & DATA JACKS ARE SHOWN ADJACENT IN PLAN, INTENT IS FOR ALL DEVICES TO BE MOUNTED WITHIN SAME SINGLE-GANG FACEPLATE.

ABBREVIATIONS

A	AMPERES
AFF	ABOVE FINISHED FLOOR
AFG	ABOVE FINISHED GRADE
ATS	AUTOMATIC TRANSFER SWITCH
BATT	BATTERY
BHEC	BANGOR HYDRO ELECTRIC CO.
BKR	BREAKER
BLDG	BUILDING
CB	CIRCUIT BREAKER
CKT	CIRCUIT
CLG	CEILING
CMP	CENTRAL MAINE POWER CO.
CT	CURRENT TRANSFORMER
DN	DOWN
DWG	DRAWING
EMERG	EMERGENCY
EMT	ELECTRICAL METALLIC TUBING
EQUIP	EQUIPMENT
FA	FIRE ALARM
FAA	FIRE ALARM ANNUNCIATOR
FACP	FIRE ALARM CONTROL PANEL
FA-PE	FIRE ALARM SYSTEM POWER EXTENDER
FIN	FINISH, FINISHED
FLR	FLOOR
GND	GROUND
HP	HORSEPOWER, HEAT PUMP
JB	JUNCTION BOX
KVA	KILO VOLT AMPS
KW	KILOWATT(S)
LTG	LIGHTING
MAX	MAXIMUM
MIN	MINIMUM
N	NEW
OC	ON CENTER
OS/OI	OWNER SUPPLIED, OWNER INSTALLED ITEM
PAR	PARTIAL CIRCUIT
PVC	POLYVINYL CHLORIDE
RECEP	RECEPTACLE
TEL	TELEPHONE
TYP	TYPICAL
UG	UNDERGROUND
V	VOLTS
W	WATTS
WG	WIRE GUARD
WM	WIREMOLD
WP	WEATHERPROOF

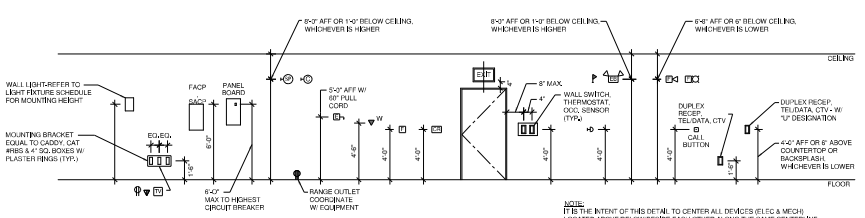

MOUNTING HEIGHT DETAIL
NOT TO SCALE

NOTE:
IT IS THE INTENT OF THIS DETAIL TO CENTER ALL DEVICES (ELEC & MECH) LOCATED ABOVE/BELOW/BESIDE EACH OTHER ALONG THE SAME CENTERLINE.
PROVIDE MTG. BLOCKING/SUPPORTS AS REQ'D.

SINK COMBS DETHLEFS
Consulting Engineers
47A Lincoln Street, Suite 500, Denver, Colorado 80203
303 308 0200 FAX 308 0202

REV.	DESCRIPTION	DATE
2	CONSTRUCTION DOCUMENTS	01-21-2013
1	NW ENTRY CONSTRUCTION DOCS	10-31-2012
0	NW ENTRY CONSTRUCTION DOCS	10-17-2012

CONSTRUCTION DOCUMENTS
01-21-2013
CURRENT ISSUE STATUS

WBRC ARCHITECTS • ENGINEERS
WWW.WBRCARCH.COM
BANGOR, MAINE 207-947-4511
PORTLAND, MAINE 207-828-1011
SARASOTA, FLORIDA 941-954-0707

CUMBERLAND COUNTY CIVIC CENTER RENOVATION
PROJECT PORTLAND, ME

ELECTRICAL LEGEND, ABBREVIATIONS AND LIGHT FIXTURE SCHEDULE
SHEET TITLE

WBRC DWG FILE	C:\Users\krm\Desktop\Revit\E0.01 - CCCC Electrical_kyle.rvt
PROJECT No.	375700
SCALE	NOT TO SCALE
PROJECT MANAGER	JRB
DRAWN BY	KRM
CHECKED BY	SJL
DRAWING SCALE	0" 1"
SHEET No.	E0.01

© Sink Combs Dethlefs 2013

1/21/2013 2:10:07 PM
C:\Users\krm\Desktop\Revit\Documents\375700 - CCCC Electrical_kyle.rvt