

EQUIPMENT SCHEDULE					
ITEM NO.	QTY	EQUIPMENT CATEGORY	MANUFACTURER	MODEL ITEM #	REMARKS
E-1	1	(3) COMPARTMENT SINK	AB RESTAURANT EQUIPMENT	SBKS-3-1014-10DB	STAINLESS STEEL
E-2	2	HAND SINK	AB RESTAURANT EQUIPMENT	SHS-10X14-A	STAINLESS STEEL
E-3	1	WIRE SHELVING	AB RESTAURANT EQUIPMENT	CMSV-1824	LOCATED IN KITCHEN
E-4	0	COMMERCIAL STAINLESS STEEL WALL-MOUNT SHELF	AB RESTAURANT EQUIPMENT	WS-18X36-A	MOUNTED AT 36" A.F.F.
E-5	1	COMMERCIAL UNDERCOUNTER LOWBOY FREEZER	METALFRIO	UCF-48	LOCATED IN KITCHEN
E-6	1	4 FOOT SHELVING UNIT	METRO	5A557C	LOCATED IN KITCHEN
E-7	0	3 FOOT SHELVING UNIT	METRO	5A537C	LOCATED IN KITCHEN
E-8	2	SCULLERY SINK	GRIFFIN	T60-288	LOCATED IN KITCHEN
E-9	3	BEVERAGE CENTER	FRIGIDARE	LFBC46F5LS	LOCATED UNDER BAR
E-10	3	CONVECTION OVEN	CALPHALON		LOCATED IN KITCHEN, STACKED ON TOP OF EACH OTHER
E-11	1	MICROWAVE OVEN	PANASONIC	NE-1022F "NSF"	LOCATED IN KITCHEN
E-12	1	REACH-IN REFRIGERATOR	METALFRIO	CFD-1RR	LOCATED IN KITCHEN
E-13	1	REACH-IN FREEZER	METALFRIO	CFD-1FR	LOCATED IN KITCHEN

FURNITURE SCHEDULE			
ITEM NO.	QTY	DESCRIPTION	REMARKS
F-1	1	BAR	BY MILLWORK VENDOR
F-2	8	66" X 32.4" TABLE	BY OTHERS
F-3	7	39" X 39" TABLE	BY OTHERS
F-4	2	MOVABLE STAGE	BY MILLWORK VENDOR
F-5	76	CHAIR	SUPPLIED AND INSTALLED BY OWNERS
F-6	3	CUSTOM APRON RACK	SUPPLIED AND INSTALLED BY OWNERS
F-7	TBD	CUSTOM ARTWORK CHAIR RAILS	SUPPLIED AND INSTALLED BY OWNERS
F-8	2	SHELVING ABOVE FOR SONOS WIRELESS SPEAKERS	SUPPLIED AND INSTALLED BY OWNERS
F-9	1	SONOS WIRELESS STREAMING MUSIC SYSTEM DISPLAY	SUPPLIED AND INSTALLED BY OWNERS
F-10	2	SHELVING FOR BEER & WINE SELECTION	SUPPLIED AND INSTALLED BY OWNERS
F-11	2	TRASH AND RECYCLING BARRELS	SUPPLIED AND INSTALLED BY OWNERS

CLIENT:
255 MASSACHUSETTS AVENUE #801
BOSTON, MA 02115
PHONE: (617) 421-6500
WEBSITE: <http://musepaintbar.com/>

ARCHITECT:
phase zero design
EIGHT WILCOX STREET
SILSBURY, CONNECTICUT 06070
PHONE: (860) 264-1824
FAX: (860) 264-1828
WEBSITE: www.phasezerodesign.com

MEP CONSULTANT:

OWNER:

MUSE PAINTBAR
245 COMMERCIAL STREET
PORTLAND, ME 04101
OWNER

REV	DATE	COMMENTS
1	03.05.2014	BUILDING DEPT COMMENTS

1 FIXTURE PLAN
SCALE: 1/4" = 1'-0"

- 1 MUSE SIGN, SUPPLIED AND INSTALLED BY OWNERS, UNDER SEPARATE PERMIT. LOCATION TO BE DETERMINED IN FIELD BY OWNER.
- 2 CUSTOM MUSE SIGN, SUPPLIED AND INSTALLED BY OWNER. LOCATION TO BE DETERMINED IN FIELD BY OWNER.
- 3 G.C. TO INSTALL MOVEABLE STAGE SUPPLIED BY MILLWORK VENDOR PER DIMENSIONS SHOWN ON PLAN. STAGE TO BE 10" IN HEIGHT WITH 1 STEP UP AND TO BE CONSTRUCTED OF PLYWOOD. REFER TO FINISH PLAN FOR FINISHES.
- 4 GC IS RESPONSIBLE FOR ALL MILLWORK ON THIS PROJECT, INCLUDING BUT NOT LIMITED TO THE BAR AND MOVABLE STAGES. G.C. CAN ACCEPT THIS RESPONSIBILITY THEMSELVES, OR SUB THIS WORK OUT TO A MILLWORK VENDOR.

CODED NOTES


- 1. G.C. IS RESPONSIBLE FOR SUPPLYING & INSTALLING ALL SITE REQUIREMENTS (IN WALL BLOCKING, ETC.) FOR MILLWORK. COORDINATE ALL REQUIREMENTS WITH VENDOR(S).
- 2. MILLWORK CONTRACTOR IS TO FURNISH SHOP DRAWINGS TO THE ARCHITECT FOR APPROVAL PRIOR TO FABRICATION WHEN REQUIRED. SEE GENERAL NOTES ON COVER SHEET.
- 3. ALL MILLWORK IS TO CONFORM TO A.W.I./A.W.M.A.C. PREMIUM STANDARDS.
- 4. MILLWORK DISPLAY FIXTURES ARE SUPPLIED BY MILLWORK VENDOR UNDER CONTRACT TO THE TENANT. ADDITIONAL MILLWORK MAY BE SUPPLIED BY TENANT, AS NOTED ON DRAWINGS. FOR A COMPLETE LISTING OF ALL TENANT SUPPLIED MILLWORK FIXTURES, CONTACT THE TENANT'S PROJECT MANAGER.
- 5. G.C. IS RESPONSIBLE FOR INSTALLATION OF ALL MILLWORK, INCLUDING TOUCH UP OF ANY DAMAGE AND FINAL CLEANING AFTER INSTALLATION.
- 6. MILLWORK VENDOR TO COORDINATE WITH OTHER TRADES AND PROVIDE CONCEALED GROUNDS & OR BLOCKING AS REQUIRED. PROVIDE CUTOUTS FOR OUTLETS AND EQUIPMENT AS REQUIRED. VERIFY ALL DIMENSIONS PRIOR TO FABRICATION.
- 7. G.C. TO PROVIDE ADDITIONAL CUTOUTS AS REQUIRED IN VENDOR SUPPLIED MILLWORK. ALL MODIFICATIONS TO BE PERFORMED BY A QUALIFIED FINISH CARPENTER. ALL CUTS TO BE PLACED TO MINIMIZE VISIBILITY. NO ADDITIONAL MODIFICATION TO MILLWORK WILL BE ALLOWED WITHOUT PRIOR APPROVAL FROM TENANT'S PROJECT MANAGER.
- 8. ALL FINISHED VENEERED WOOD SHALL BE FREE FROM KNOTS, SHAKES AND OTHER DEFECTS AFFECTING EITHER DURABILITY OR APPEARANCE, & SHALL BE CAREFULLY SELECTED FOR GRAIN & COLOR FOR MARKED VARIATIONS AT JOINTS BETWEEN VENEERS.
- 9. NO FIELD FINISHING OTHER THAN MINOR TOUCH-UPS OF MILLWORK WILL BE PERMITTED.
- 10. ALL MILLWORK HARDWARE TO BE FURNISHED & INSTALLED BY MILLWORK VENDOR.
- 11. ALL CABINET AND DRAWER INTERIORS TO BE CLEAR MAPLE LACQUERED PLYWOOD VENEER UNLESS OTHERWISE NOTED.
- 12. MILLWORK VENDOR TO FURNISH & INSTALL RUBBER BUMPERS ON ALL DOORS AND DRAWERS.
- 13. ALL BLOCKING TO BE FRIT.

GENERAL NOTES

ISSUE DATE: 01.20.2014

SCALE: AS NOTED

SEAL:

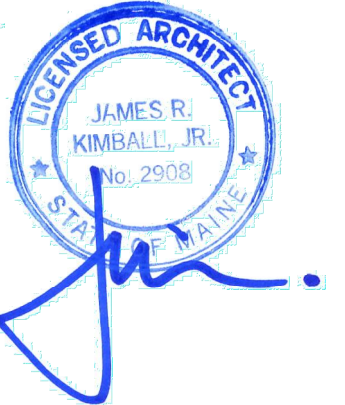

PROJECT NUMBER: 1113158

DRAWN BY: LAH

CHECKED BY: MSG

Copyright (c) by Phase Zero Design Corp. All Rights Reserved.

SHEET TITLE:

FIXTURE PLAN

SHEET NUMBER:

A105