#### City of Portland, Maine - Building or Use Permit Application 389 Congress Street, 04101, Tel: (207) 874-8703, FAX: 874-8716 Location of Construction: Phone: Owner: Permit No: \*\*\*130 Highland St. 15 Ptld. 04103 Matthew Danch 775-5935 991018 Lessee/Buyer's Name: BusinessName: Owner Address: Phone: sea Permit Issued: Contractor Name: Address: Phone: Homeowser COST OF WORK: PERMIT FEE: Past Use: Proposed Use: SEP 2 2 1999 \$ 1000.00 \$ 30.00 3 Unit 经被继续 **FIRE DEPT.** □ Approved INSPECTION: Use Group: P2Type:5 6 ☐ Denied BOCA96 Signature: Signature: Zoning Approval: 3 Proposed Project Description: PEDESTRIAN ACTIVITIES DISTRICT (P.A.D.) Action: Approved Special Zone or Reviews: 12 x 20 deck on let floor Approved with Conditions: ☐ Shoreland Denied ☐ Wetland 《 ☐ Flood Zone ☐ Subdivision® Signature: Date: ☐ Site Plan maj ☐minor ☐mm ☐ Permit Taken By: Date Applied For: Authy September 10, 1999 **Zoning Appeal** □ Variance This permit application does not preclude the Applicant(s) from meeting applicable State and Federal rules, ☐ Miscellaneous Building permits do not include plumbing, septic or electrical work. ☐ Conditional Use Building permits are void if work is not started within six (6) months of the date of issuance. False informa-☐ Interpretation 3. □ Approved tion may invalidate a building permit and stop all work.. □ Denied illag sagelfer Historic Preservation Not in District or Landmark ☐ Does Not Require Review Matthew Danch □ Requires Review 130 Mighland St. PERMIT ISSUED Action: Portland, ME 04103 WITH REQUIREMENTS CERTIFICATION ☐ Appoved ☐ Approved with Conditions I hereby certify that I am the owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been ☐ Denied authorized by the owner to make this application as his authorized agent and I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in the application is issued, I certify that the code official's authorized representative shall have the authority to enter all Date: areas covered by such permit at any reasonable hour to enforce the provisions of the code(s) applicable to such permit PHONE: SIGNATURE OF APPLICANT ADDRESS: RESPONSIBLE PERSON IN CHARGE OF WORK, TITLE PHONE: **CEO DISTRICT** White-Permit Desk Green-Assessor's Canary-D.P.W. Pink-Public File Ivory Card-Inspector

5/02/00 - Deck is complete and appears to meet	Contract regun	ements.
	$\mathcal{U}$	Jana
1		
cheaut		
		<u> </u>
· (		
	Inspection Record	
Туре	inspection Record	Date
Foundation:		
Framing:		
Plumbing:		V

Other:

	BUILDING PERMIT REPORT	
	10/50-T99 ADDRESS: 130 Highland ST. CBL: 123-F-918	
DATE:	10 Sep 1. 99 ADDRESS: 130 /1962and St. CBL: 125-1	
REASO	ON FOR PERMIT: 12X20 Cleck 15T FLOOR	
BUILE	INGOWNER: MATThew Dasch	
	IT APPLICANT: /Contractor SAO	
	$D \rightarrow construction Type 5B$	
	KOOT	
The Ci The Ci	ty's Adopted Building Code (The BOCA National Building Code/1996 with City Amendments) ty's Adopted Mechanical Code (The BOCA National Mechanical Code/1993)	
	CONDITION(S) OF APPROVAL	
This p	ermit is being issued with the understanding that the following conditions are met: $\frac{21}{35}$	
Appro	yed with the following conditions:	
1/	the test production and lower	
<b>¾</b> ί·	This permit does not excuse the applicant from meeting applicable State and Federal rules and laws.  Before concrete for foundation is placed, approvals from the Development Review Coordinator and Inspection Services must be obtained.	
<del>\\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \</del>	Before concrete for foundation is placed, approval from the Beverophic in Review Containing Containing the Beverophic in Review Containing Cont	
3.	Foundation drain shall be placed around the perimeter of a foundation that consists of gravet of traches beyond the outside edge of the	
<b>J.</b>	10 percent material that passes through a No. 4 sieve. The unit share exceed a military of the hase under the floor, and that the	
	footing. The thickness shall be such that the bottom of the drain is not higher than the bottom of the drain shall be covered with an approved filter top of the drain is not less than 6 inches above the top of the footing. The top of the drain shall be covered with an approved filter top of the drain is not less than 6 inches above the top of the invert of the pipe or tile shall not be higher than the floor	
	top of the drain is not less than 6 inches above the top of the footing. The top of the drain shall not be higher than the floor membrane material. Where a drain tile or perforated pipe is used, the invert of the pipe or tile shall not be higher than the floor membrane material. The pipe or tile shall be	
	elevation. The top of joints or top of perforations shall be protected with an approximate them 6" of the same material. Section 1813.5.2	
	elevation. The top of joints or top of perforations shall be protected with an approved interinstance material. Section 1813.5.2 placed on not less than 2" of gravel or crushed stone, and shall be covered with not less than 6" of the same material. Section 1813.5.2 placed on not less than 2" of gravel or crushed stone, and shall be covered with not less than 6" of the same material. Section 1813.5.2 placed on not less than 2" of gravel or crushed stone, and shall be covered with not less than 6" of the same material. Section 1813.5.2 placed on not less than 2" of gravel or crushed stone, and shall be covered with not less than 6" of the same material. Section 1813.5.2	
4.	Foundations anchors shall be a minimum of 12 in diameter, 7 into the foundations	
	The and domperating shall be done in accordance with according 1013.0 of the	
5. 6.	Precaution must be taken to protect concrete from freezing. Section 1908.0  Precaution must be taken to protect concrete from freezing. Section 1908.0  Precaution must be taken to protect concrete from freezing. Section 1908.0	
7	It is strongly recommended that a registered land surveyor theck an foundation forms	
٠.	that the proper setbacks are maintained.	
8.	Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 of 14 shan to compare rating. Private interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private	
	interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour tribunations and floor/ceiling assembly which are constructed with not less than 1-hour tribunations and the attic area garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area garages attached side-by-side to rooms.	
	by means of ½ inch gypsum board or the equivalent approach to the garage means of ½	
	garage side. (Chapter 4, Section 407.0 of the BOCA/1996) All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code.	
9.	All chimneys and vents shall be installed and maintained as per Grapher 12. Mechanical Code/1993). Chapter 12 & NFPA 211  Mechanical Code/1993). Chapter 12 & NFPA 211  Mechanical Code/1993. Chapter 12 & NFPA 211	
10	Mechanical Code/1993). Chapter 12 & NFPA 211  Mechanical Code/1993). Chapter 12 & NFPA 211  Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 1214.0 of the City's Building	
10.	Code.	
X_11.	Code.  Guardrails & Handrails: A guardrail system is a system of building components located near the open sides of elevated walking surfaces Guardrails & Handrails: A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level.	
4	for the nurpose of minimizing the possibility of all accidental tables and public garages and open	
	Groups 42", except Use Group R which is 36". In occupancies in Use Group A, B, H-4, I-1, I-2, W and R date poor and pass through parking structures, open guards shall have balusters or be of solid material such that a sphere with a diameter of 4" cannot pass through parking structures, open guards shall have balusters or be of solid material such that a sphere with a diameter of 4" cannot pass through parking structures, open guards shall have an organization that would provide a ladder effect. (Handrails shall be a minimum of 3e4" but	
	parking structures, open guards shall have balusters or be of solid material such that a sphere with a diameter of the parking structures, open guards shall have an ornamental pattern that would provide a ladder effect. (Handrails shall be a minimum of 3e4" but any opening. Guards shall not have an ornamental pattern that would provide a ladder effect. (Handrails shall be a minimum of 3e4" but any opening. Guards shall not have an ornamental pattern that would provide a ladder effect. (Handrails shall be a minimum of 3e4" but any opening. Guards shall not have an ornamental pattern that would provide a ladder effect. (Handrails shall be a minimum of 3e4" but any opening. Guards shall not have an ornamental pattern that would provide a ladder effect. (Handrails shall be a minimum of 3e4" but any opening. Guards shall not have an ornamental pattern that would provide a ladder effect. (Handrails shall be a minimum of 3e4" but any opening. Guards shall not have an ornamental pattern that would provide a ladder effect.	
	any opening. Guards shall not have an ornamental pattern that would provide a ladder effect. (Tantalans shall not have a circular cross section not more than 38". Use Group R-3 shall not be less than 30", but not more than 38".) Handrail grip size shall have a circular cross section not more than 38". Use Group R-3 shall not be less than 30", but not more than 38".) Handrails shall be on both sides of	
	with an outside diameter of at least 1 74 and not greater than 2 7 (0000000000000000000000000000000000	
	stairway. (Section 1014./)	
12.	Headroom in habitable space is a minimum of 76". (Section 1204.0)  Stair construction in Use Group R-3 & R-4 is a minimum of 10" tread and 7 3/4" maximum rise. All other Use Group minimum 11"	
K13.	tread 7" maximum rise. (Section 1014-0)	
14.	The minimum headroom in all parts of a stairway shan not be less than so that the base of least one operable window or exterior door	
15.	Every sleening room below the fourth story in buildings of ose Greep's terms of special knowledge or separate	
- · ·	approved for emergency egress or rescue. The difficulty approved for emergency egress or rescue. The difficulty above	
	tools. Where windows are provided as illeans of estads of results with the same height dimension of 24 literes	
	the floor. All egress or rescue windows from sleeping rooms shall have a minimum net clear opening neight aimension of 5.7 sq. ft. (610mm). The minimum net clear opening width dimension shall be 20 inches (508mm), and a minimum net clear opening of 5.7 sq. ft.	
	(Oromin). ****	

(Section 1018.6)

- 16. Each apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable when it exits directly from the apartment to the building exterior with no communications to other apartment units. (Section 1010.1)
- 17. All vertical openings shall be enclosed with construction having a fire rating of at least one (1) hour, including fire doors with self closer's. (Over 3 stories in height requirements for fire rating is two (2) hours.) (Section 710.0)
- 18. The boiler shall be protected by enclosing with (1)hour fire rated construction including fire doors and ceiling, or by providing automatic extinguishment. (Table 302.1.1)
- All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the City's Building Code Chapter 9, Section 920.3.2 (BOCA National Building Code/1996), and NFPA 101 Chapter 18 &19. (Smoke detectors shall be installed and maintained at the following locations):
  - In the immediate vicinity of bedrooms
  - In all bedrooms
  - In each story within a dwelling unit, including basements

In addition to the required AC primary power source, required smoke detectors in occupancies in Use Groups R-2, R-3 and I-1 shall receive power from a battery when the AC primary power source is interrupted. (Interconnection is required) Section 920.3.2.

- 20. A portable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved agency and be of an approved type. (Section 921.0)
- 21. The Fire Alarm System shall maintained to NFPA #72 Standard.
- 22. The Sprinkler System shall maintained to NFPA #13 Standard.
- 23. All exit signs, lights and means of egress lighting shall be done in accordance with Chapter 10 Section & Subsections 1023.0 & 1024.0 of the City's Building Code. (The BOCA National Building Code/1996)
- 24. Section 25-135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a permit to excavate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year".
- The builder of a facility to which Section 4594-C of the Maine State Human Rights Act Title 5 MRSA refers, shall obtain a certification from a design professional that the plans commencing construction of the facility, the builder shall submit the certification the Division of Inspection Services.
- 26. Ventilation shall meet the requirements of Chapter 12 Sections 1210.0 of the City's Building Code. (Crawl spaces & attics).
- All electrical, plumbing and HVAC permits must be obtained by a Master Licensed holders of their trade. No closing in of walls until all electrical (min.72 hours notice) and plumbing inspections have been done.
- 28. All requirements must be met before a final Certificate of Occupancy is issued.
- All building elements shall meet the fastening schedule as per Table 2305.2 of the City's Building Code (the BOCA National Building Code/1996).
- Ventilation of spaces within a building shall be done in accordance with the City's Mechanical Code (The BOCA National Mechanical Code/1993). (Chapter M-16)
- 31. Please read and implement the attached Land Use Zoning report requirements.
- M32. Boring, cutting and notching shall be done in accordance with Sections 2305.4.4, 2305.5.1 and 2305.5.3 of the City's Building Code.
- 33. Glass and glazing shall meet the requirements of Chapter 24 of the building code.
- 34. All signage, shall be done in accordance with Section 3102.0 signs of the City's Building Code, (The BOCA National Building Code
- A36. The proposed 10" sono Tube, Founda Tion (Pier) Shall be placed

on footing with fasten douge between Footing of Dier- Also of Fasten device shall be used between pier and froming of deck,

P Santuel Auffices Building Inspector

Marge Schmuckal, Zoning Administrator

PSH 7/24/99

38.

<sup>\*\*</sup>On the basis of plans submitted and conditions placed on these plans any deviations shall require a separate approval.

Zoning Division Marge Schmuckal Zoning Administrator



Department of Urban Development Joseph E. Gray, Jr. Director

### CITY OF PORTLAND

Matthew Dasch 130 Highland Street - 1-F Portland, ME September 16, 1999

RE:

130 Highland St. - 123-F-018 R-5 zone

Dear Mr Dasch,

I am in receipt of your application to construct a 12' x 20' deck on the first floor. You plans show that you have a 14' setback instead of the required 20' setback. Your permit can not be issued unless the zoning ordinance requirements can be met. I do have the ability to allow a 15' rear setback if you can show me good cause as to why you can not meet the required 20' setback. In any case, you would need to adjust your plans to reflect the required setbacks.

Your permit will be on hold and will not be issued until I receive further information from you. If I do not hear from you within 6 months, your application will no longer be valid. No work shall begin until a permit is issued.

Very truly yours,


Marge Schmuckal Zoning Administrator

cc:

File

Adjustments has 17,5' feet in Stead of 14 feet

tropedy lie 175') to rent property per pure Shill not be less Than 9/21/99 12'0" 15' zο' δ" Existing Howen 70' -10,5,7 Existing
Flower land

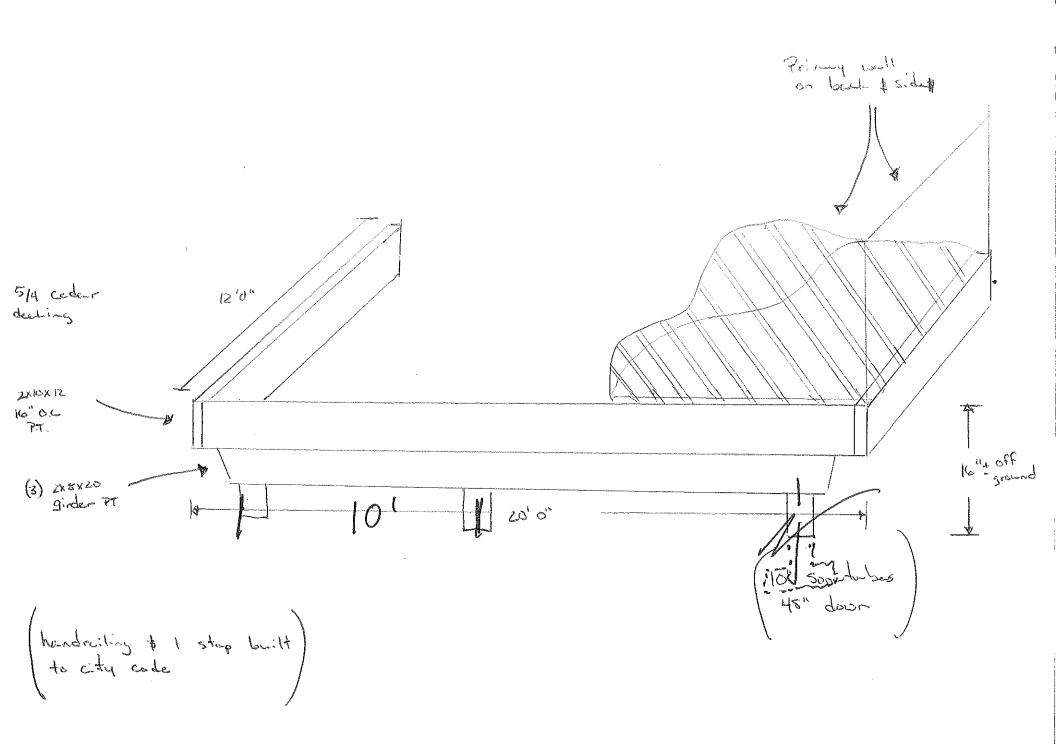

## THIS IS NOT A PERMIT/CONSTRUCTION CANNOT COMMENCE UNTIL THE PERMIT IS ISSUED

# Building or Use Permit Pre-Application Additions/Alterations/Accessory Structures

To Detached Single Family Dwelling

In the interest of processing your application in the quickest possible manner, please complete the Information below for a Building or Use Permit.

NOTE\*\*If you or the property owner owes real estate or personal property taxes or user charges on any property within the City, payment arrangements must be made before permits of any kind are accepted, Location/Address of Construction 4 1-6 Portland Highland SOIPO Owner: Marthen Telephone#: 775-5935 Tax Assessor's Chart, Block & Lot Number Owner's Address: 130 Highland Lessee/Buyer's Name (If Applicable) Cost Of Work: 60.000i R Partland, ME 64103 Proposed Project Description:(Please be as specific as possible) 1st Floor Deck 12x 20 Contractor's Name, Address & Telephone # Rec'd By: Home owner Separate permits are required for Internal & External Plumbing, HVAC and Electrical installation. •All construction must be conducted in compliance with the 1996 B.O.C.A. Building Code as amended by Section 6-Art II. ·All plumbing must be conducted in compliance with the State of Maine Plumbing Code. •All Electrical Installation must comply with the 1996 National Electrical Code as amended by Section 6-Art III. •HVAC(Heating, Ventilation and Air Conditioning) installation must comply with the 1993 BOCA Mechanical Gods DEPT. OF BUILDING INSPECT You must Include the following with you application: 1) A Copy of Your Deed or Purchase and Sale Agreement 2) A Copy of your Construction Contract, if available SEP | 0 1999 3) A Plot Plan (Sample Attached) If there is expansion to the structure, a complete plot plan (Site Plan) must include: The shape and dimension of the lot, all existing buildings (if any), the proposed structure and the distance from

property lines. Structures include decks porches, a bow windows cantilever sections and roof overhangs, as well as, sheds, pools, garages and any other accessory structures.

Scale and required zoning district setbacks

### 4) Building Plans (Sample Attached)

A complete set of construction drawings showing all of the following elements of construction:

- Cross Sections w/Framing details (including porches, decks w/ railings, and accessory structures)
- Floor Plans & Elevations
- Window and door schedules
- Foundation plans with required drainage and dampproofing
- Electrical and plumbing layout. Mechanical drawings for any specialized equipment such as furnaces, chimneys, gas equipment, HVAC equipment (air handling) or other types of work that may require special review must be included.

#### Certification

I hereby certify that I am the Owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been authorized by the owner to make this application as his/her authorized agent. I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in this application is issued, I certify that the Code Official's authorized representative shall have the authority to enter all areas covered by this permit at any reasonable hour to enforce the provisions of the codes applicable to this permit.

The state of the s	
Signature of applicant:	Date:
, o	
	#

Inspection Services Michael J. Nugent Manager



Department of Urban Development Joseph E. Gray, Jr. Director

CITY OF PORTLAND



Building or Use Permit Application Additions/Alterations/Accessory Structures To Detached Single Family Dwelling

As an applicant for a building permit, you are about to enter into a relationship with our Office. We welcome any questions, comments or suggestions that will make the process more efficient. Attached you will find an application and some samples of the submissions you will provide at application time. Please read <u>ALL</u> of the information and if you need any further assistance please call 874-8703 or 874-8693.