



12, 18 and 26 Watt SLIM wallpacks are ultra efficient and deliver impressive light distribution with a compact low-profile design that's super easy to install as a downlight or uplight.

Color: Bronze

Weight: 4.5 lbs

Project:
PMA Sculpture lighting

Type:
RAB SLIM18 BRONZE

Prepared By:
N Oliver

Date:
5/15/16

Driver Info

Type: Constant Current
120V: 0.18A
208V: 0.11A
240V: 0.09A
277V: 0.08A
Input Watts: 20W
Efficiency: 90%

LED Info

Watts: 18W
Color Temp: 5100K (Cool)
Color Accuracy: 67 CRI
L70 Lifespan: 100000
Lumens: 2,096
Efficacy: 105 LPW

Technical Specifications

Listings

UL Listing:

Suitable for wet locations. Suitable for mounting within 1.2m (4ft) of the ground.

ADA Compliant:

SLIM™ is ADA Compliant.

Dark Sky Approved:

The International Dark Sky Association has approved this product as a full cutoff, fully shielded luminaire.

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80, and have received the Department of Energy "Lighting Facts" label.

DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities.
DLC Product Code: P0000171Q

Construction

IP Rating:

Ingress Protection rating of IP66 for dust and water.

Cold Weather Starting:

The minimum starting temperature is -40°F/-40°C.

Ambient Temperature:

Suitable for use in 40°C (104°F) ambient temperatures.

Thermal Management:

Superior heat sinking with internal Air-Flow fins.

Housing:

Precision die-cast aluminum housing.

Mounting:

Heavy-duty mounting bracket with hinged housing for easy installation.

Recommended Mounting Height:

Up to 14 ft.

Lens:

Tempered glass lens.

Reflector:

Specular thermoplastic.

Gaskets:

High-temperature silicone.

Finish:

Our environmentally friendly polyester powder coatings are formulated for high-durability and long-lasting color, and contains no VOC or toxic heavy metals.

Green Technology:

Mercury and UV free, and RoHS compliant.

LED Characteristics

LED:

Multi-chip, long-life LED.

Lifespan:

100,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations.

Color Consistency:

7-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color.

Color Stability:

LED color temperature is warranted to shift no more than 200K in CCT over a 5 year period.

Color Uniformity:

RAB's range of CCT (Correlated Color Temperature) follows the guidelines for the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2011.

Electrical

Driver:

Constant Current, Class 2, 100-277V, 50/60 Hz., 4KV surge protection, 500mA, 100-240VAC 0.3-0.15 Amps, 277VAC 0.15 Amps, Power Factor 99%.

THD:

9.8% at 120V

Other

HID Replacement Range:

The SLIM18 can be used to replace 100W MH based on delivered lumens.

California Title 24:

SLIM18 complies with 2013 California Title 24 building and electrical codes as a residential outdoor fixture. See SLIM18/PC for a model that complies as a commercial outdoor non-pole-mounted fixture__≤__30 Watts.

Technical Specifications (continued)

Other

Patents:


The design of the SLIM™ is protected by patents in U.S. Pat D681,864, and pending patents in Canada, China, Taiwan and Mexico.

Optical

BUG Rating:

B1 U0 G0

Dimensions

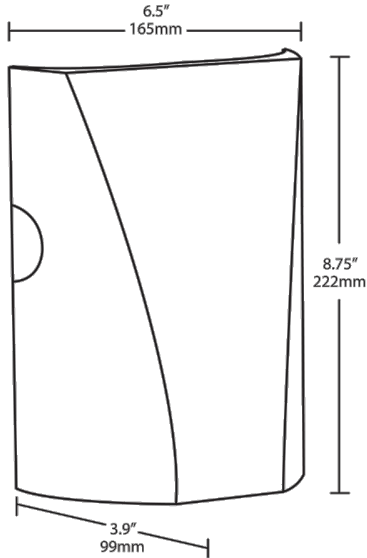

Features

- Full cutoff, fully shielded LED wallpack
- Can be used as a downlight or uplight
- Contractor friendly features for easy installation
- 100,000-hour LED Life
- 5-Year Warranty

Ordering Matrix

Family	Watts	Color Temp	Finish	Photocell	Dimming
SLIM	18	4000K	BRONZE	N/A	N/A
	26 = 26W 18 = 18W 12 = 12W	= 5000K (Cool) Y = 3000K (Warm) N = 4000K (Neutral)	= Bronze W = White	= No Photocell /PC = 120V Button /PC2 = 277V Button	= No Dimming /D10 = Dimmable