Location of Construction:	Owner: 2 0410	Phon	e:	Permit N 9 9 0 8 4 8
Owner Address: 30 horsehoe Dr. Scarborough, ME	Lessee/Buyer's Name:	Phone: Busin	nessName:	DEDBAIT ICCIED
Contractor Name:	Address:	Phone:		Permit Issued
Past Use:	Proposed Use:	COST OF WORK:	PERMIT FEE: \$ 23.00	AUG 1 1 1999
Bar & Gráll	SADE	FIRE DEPT. □ Approve □ Denied	Use Group: 3-3 Type: 8	Zone: CBL: 130-X-021
Proposed Project Description:		Signature: PEDESTRIAN ACTIVIT	Signature: Arfac	Zoning Approval:
Enclose frontD Door Area		Action: Approve	ed with Conditions:	Special Zone or Reviews: Shoreland Wetland Flood Zone Subdivision
Permit Taken By: SP	Date Applied For:	June 23, 1999		☐ Site Plan maj ☐minor ☐mm ☐
 This permit application does not preclude the A Building permits do not include plumbing, sep Building permits are void if work is not started tion may invalidate a building permit and stop 	otic or electrical work. within six (6) months of the date of all work	issuance. False informa- C.J. Thirsty's 726 Forest Ave. Portland, ME 04103 c/o Joe Saucier		□ Variance □ Miscellaneous □ Conditional Use □ Interpretation □ Approved □ Denied Historic Preservation □ Not in District or Landmark □ Does Not Require Review □ Requires Review
			ERMIT ISSUED	Action:
		VVIIF	I REQUIREMENTS	
I hereby certify that I am the owner of record of the authorized by the owner to make this application as if a permit for work described in the application is a areas covered by such permit at any reasonable how	s his authorized agent and I agree to issued, I certify that the code official or to enforce the provisions of the code.	conform to all applicable laws or l's authorized representative shall	f this jurisdiction. In additio	n, Denied
SIGNATURE OF APPLICANT	ADDRESS:	DATE:	PHONE:	100
RESPONSIBLE PERSON IN CHARGE OF WORK	K, TITLE rmit Desk Green–Assessor's C	anany D.D.W. Bink Bublic Eile	PHONE:	CEO DISTRICT

130 H 21
QA 120US
990170
110, 12
1410

Inspection Record		
Туре		Date
Foundation:	_	
Framing:	_	
Plumbing:	_	
Final:	-	
Other:		

THIS IS NOT A PERMIT/CONSTRUCTION CANNOT COMMENCE UNTIL THE PERMIT IS ISSUED

Building or Use Permit Pre-Application

Attached Single Family Dwellings/Two-Family Dwelling

Multi-Family or Commercial Structures and Additions Thereto

In the interest of processing your application in the quickest possible manner, please complete the Information below for a Building or Use Permit.

NOTE**If you or the property owner owes real estate or personal property taxes or user charges on ANY PROPERTY within the City, payment arrangements must be made before permits of any kind are accepted.

	041	
Location/Addressof Construction (include Portion of Building):	ED Thirstys X721 Fores	4 Aug 04/03
Total Square Footage of Proposed Structure 20/	Square Footage of Lot	·
Tax Assessor's Chart, Block & Lot Number	Owner: Businesso.	MU Telephone#:
Chart# / 30 Block# / Lot# Od/	Joe Sancien	770-6681
Owner's Address:	Lessee/Buyer's Name (If Applicable)	Cost Of Work: Fee
· 30 Horseshoe Dr. Scarbreo, Mr.	Same	\$\$700 \$35
Proposed Project Description:(Please be as specific as possible)		
Enclose Front	Door Aven-	
Contractor's Name, Address & Telephone Scott	Dodd	Rec'd By
se: Bar VIII	Proposed Use: Samo	
•All plumbing must be conducted in complia •All plumbing must be conducted in All Electrical Installation must comply we HVAC(Heating, Ventililation and Air Condity ou must Include the following with you application 1) ACopy of Y 2) A Copy of Minor or Major site plan review will be required for checklist outlines the minimum standards for a site plan.	ited in compliance with the State of Maine Plith the 1996 National Electrical Code as ame tioning) installation must comply with the 19 cour Deed or Purchase and Sale Agreement your Construction Contract, if available 3) A Plot Plan/Site Plan the above proposed projects. The attached lan. 4) Building Plans	s amended by Section 6-Art II. umbing Code. nded by Section 6-Art III. 993 BOCA Mechanical Code. CITY OF PORTLAND, Market Bound Code. JUN 2 3 1999
A complete set of construction drawings showing all	tion documents must be designed by a registe	ered design professional.

A complete set of construction drawings showing all of the following elements of construction:

- Cross Sections w/Framing details (including porches, decks w/ railings, and accessory structures)
- Floor Plans & Elevations
- Window and door schedules
- Foundation plans with required drainage and dampproofing
- Electrical and plumbing layout. Mechanical drawings for any specialized equipment such as furnaces, chimneys, gas
 equipment, HVAC equipment (air handling) or other types of work that may require special review must be included.

Certification

I hereby certify that I am the Owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been authorized by the owner to make this application as his/her authorized agent. I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in this application is issued, I certify that the Code Official's authorized representative shall have the authority to enter all areas covered by this permit at any reasonable hour to enforce the provisions of the codes applicable to this permit.

enforce the provisions of the codes applicable to this permit.			1	1
Signature of applicant:	San'	Date:	/23/9	79

Building Permit Fee: \$25.00 for the 1st \$1000.cost plus \$5.00 per \$1,000.00 construction cost thereafter.

Additional Site review and related fees are attached on a separate addendum

Zoning Division Marge Schmuckal Zoning Administrator



Department of Urban Development Joseph E. Gray, Jr. Director

CITY OF PORTLAND

Joe Saucier c/o C.J. Thirsty's 726 Forest Avenue Portland, ME 04103

June 29, 1999

Note: Applied for use permit on 7/5/99

RE:

726 Forest Ave. - 130-H-21 - B-2 zone

Dear Joe Saucier,

I am in receipt of your application to enclose the front door area at C.J. Thirsty's. Please note that our records indicate that we never had a use change for the present "drinking establishment". Drinking establishments are an allowable use in the B-2 zone in which you are located. It will be necessary to apply at this time for a change of use permit. I have enclosed a copy of our permit application which informs you what you will need to submit for the review. We will need an accurate floor plan with dimensions. We will also need a site plan indicating your such as parking size, guards, fences, and lighting. I am also enclosing a copy of the parking another that may affect your proposal and will help you design your parking area to codes.

Until you apply for this change of use permit, it will be necessary to put your present application for the front door enclosure on hold.

If you have any questions regarding this matter, please do not hesitate to contact me at 874-8695.

Very truly yours,

Marge Schmuckal Zoning Administrator

CC:

Joseph Gray, Jr., Dir. of Planning & Urban Dev. Mark Adelson, Housing & Neighborhood Services Gary Wood, Corporation Counsel Mike Nugent, Housing & Neighborhood Services

	BUILDING PERMIT REPORT
	5:24 June 199ADDRESS: 726 FOREST AUR. CBL: 130 -14 - 621
	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
REAS	SON FOR PERMIT: ENCLOSE Fron T door
ппя	DINGOWNER: JOE SAUCIES
	MIT APPLICANT:SCOTT Dodd
	N = CONSTRUCTION TVPF 5 M
USE	GROUP
	CONDITION(S) OF APPROVAL
This	permit is being issued with the understanding that the following conditions are met:
11111	oved with the following conditions: $\frac{\times / \times / / \times / 3}{\times / \times / 3}$
Appr	. Let at a 1 T- Jewel miles and lower
X1.	This permit does not excuse the applicant from meeting applicable State and Federal rules and laws. Before concrete for foundation is placed, approvals from the Development Review Coordinator and Inspection Services must be obtained. (A
2.	Before concrete for foundation is placed, approving from 1975. 24 hour notice is required prior to inspection)
3.	Foundation drain shall be placed around the perimeter of a foundation that consists of glaving of 12 inches beyond the outside edge of the footing. The
٥.	percent material that passes through a No. 4 sieve. The drain said extends a minimum of the base under the floor, and that the top of the drain is not
	thickness shall be such that the bottom of the drain is not higher than the bottom of the dase that the bottom of the footing. The top of the drain shall be covered with an approved filter membrane material. Where a drain less than 6 inches above the top of the footing. The top of the brigher than the floor elevation. The top of joints or top of perforations
	less than 6 inches above the top of the footing. The top of the drain shall be covered with an approved into the position of the pipe or tile shall not be higher than the floor elevation. The top of joints or top of perforations tile or perforated pipe is used, the invert of the pipe or tile shall be placed on not less than 2" of gravel or crushed stone, and
	1 111 wastested with an approved filter membrane material. The pipe of the shift of particular the provention of the shift of the shift of the particular that the particular the pa
	shall be covered with not less than 6" of the same material. Section 1813.5.2 shall be covered with not less than 6" of the same material. Section 1813.5.2
4.	Foundations anchors shall be a minimum of 1/2" in diameter, 7" into the foundation was,
	maximum 6' o.c. between bolts. (Section 2305.17) erproofing and dampproofing shall be done in accordance with Section 1813.0 of the building code.
5. ,	erproofing and dampproofing shall be done in accordance with Section 1908.0 aution must be taken to protect concrete from freezing. Section 1908.0
•	aution must be taken to protect concrete from freezing. Section 1908.0 strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to verify that the
	oper setbacks are maintained.
	Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior
	spaces by fire partitions and floor/ceiling assembly which are constituted with the interior spaces and the attic area by means of 1/2 inch
	spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1 Hour me the attic area by means of ½ inch side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area by means of ½ inch sypsum board or the equivalent applied to the garage means of ½ inch sypsum board or the equivalent applied to the garage means of ½ inch sypsum board or the equivalent applied to the garage means of ½ inch sypsum board or the equivalent applied to the garage means of ½ inch sypsum board or the equivalent applied to the garage means of ½ inch sypsum board or the equivalent applied to the garage means of ½ inch sypsum board or the equivalent applied to the garage means of ½ inch sypsum board or the equivalent applied to the garage means of ½ inch sypsum board or the equivalent applied to the garage means of ½ inch sypsum board or the equivalent applied to the garage means of ½ inch sypsum board or the equivalent applied to the garage means of ½ inch sypsum board or the equivalent applied to the garage means of ½ inch sypsum board or the equivalent applied to the garage means of ½ inch sypsum board or the equivalent applied to the garage means of ½ inch sypsum board or the equivalent applied to the garage means of ½ inch sypsum board or the equivalent applied to the garage means of ½ inch sypsum board or the equivalent applied to the garage means of ½ inch sypsum board or the equivalent applied to the garage means of ½ inch sypsum board or the equivalent applied to the garage means of ½ inch sypsum board or the equivalent applied to the garage means of ½ inch sypsum board or the equivalent applied to the garage means of ½ inch sypsum board or the equivalent applied to the garage means of ½ inch sypsum board or the equivalent applied to the garage means of ½ inch sypsum board or the equivalent applied to the garage means of ½ inch sypsum board or the equivalent applied to the garage means of ½ inch sypsum board or the equivalent applied to t
	gypsum board or the equivalent applied to the garage means of 72 mon gripsum observed.
	Section 407.0 of the BOCA/1996) Section 407.0 of the BOCA/1996) All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National Mechanical All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code.
9.	Code/1993). Chapter 12 & NFPA 211 Code/1993). Chapter 12 & NFPA 211
10.	Code/1993). Chapter 12 & NFPA 211 Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 1214.0 of the City's Building Code. Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 1214.0 of the City's Building Code.
10. 11.	Sound transmission control in residential building shall be done in accordance with Chapter 12, bottom 127 to elevated walking surfaces for the Guardrails & Handrails: A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the Guardrails & Handrails: A guardrail system is a system of building components located near the open sides of elevated walking surface to the lower level. Minimum height all Use Groups 42",
A	purpose of minimizing the possibility of an accidental fail from the walls and purpose of minimizing the possibility of an accidental fail from the walls and purpose of minimizing the possibility of an accidental fail from the walls and purpose of minimizing the possibility of an accidental fail from the walls and purpose of minimizing the possibility of an accidental fail from the walls are supposed to the possibility of an accidental fail from the walls are supposed to the possibility of an accidental fail from the walls are supposed to the possibility of an accidental fail from the walls are supposed to the possibility of an accidental fail from the walls are supposed to the possibility of an accidental fail from the walls are supposed to the possibility of an accidental fail from the walls are supposed to the possibility of an accidental fail from the walls are supposed to the possibility of an accidental fail from the walls are supposed to the possibility of an accidental fail from the wall fail from
	except Use Group R which is 36". In occupancies in Use Group R, B, T,
	open guards shall have balusters or be of solid inaterial such that a specific hall be a minimum of 3e4" but not more than 38". Use Group R-
	not have an ornamental pattern that would provide a ladder effect. (Handrails shall be a limiting of 35.) Use an outside diameter of at least 1 3 shall not be less than 30", but not more than 38".) Handrail grip size shall have a circular cross section with an outside diameter of at least 1 3 shall not be less than 30", but not more than 38".) Handrails shall be on both sides of stairway. (Section 1014.7)
	3 shall not be less than 30", but not more than 38".) Handrail grip size shall have a both sides of stairway. (Section 1014.7) 1/4" and not greater than 2". (Sections 1021 & 1022.0) - Handrails shall be on both sides of stairway. (Section 1014.7)
10	Headroom in habitable space is a minimum of 7'6". (Section 1204.0)
12. V 13	Headroom in habitable space is a minimum of 76". (Section 1204.0) Stair construction in Use Group R-3 & R-4 is a minimum of 10" trend and 7¾" maximum rise. All other Use Group minimum 11" tread,
X 13.	
14.	The minimum headroom in all parts of a stairway shall not be less than 80 metros. (60) have at least one operable window or exterior door
15.	Every sleeping room below the fourth story in buildings of Ose Gloup's Residual to the use of special knowledge or separate tools.
	approved for emergency egress or rescue. The units must be open than a sill height not more than 44 inches (1118mm) above the floor. All
	Where windows are provided as means of egress or rescue they shall have a sin neight not more data. Where windows are provided as means of egress or rescue they shall have a minimum net clear opening height dimension of 24 inches (610mm). The egress or rescue windows from sleeping rooms shall have a minimum net clear opening of 5.7 sq. ft. (Section 1018.6)
	egress or rescue windows from sleeping rooms shall have a minimum net clear opening neight dimension of 5.7 sq. ft. (Section 1018.6) minimum net clear opening width dimension shall be 20 inches (508mm), and a minimum net clear opening of 5.7 sq. ft. (Section 1018.6) minimum net clear opening width dimension shall be 20 inches (508mm), and a minimum net clear opening of 5.7 sq. ft. (Section 1018.6)
16	minimum net clear opening width dimension shall be 20 inches (508mm), and a minimum net clear opening of the same of egress. A single exit is acceptable when it exits directly Each apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable when it exits directly Each apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable when it exits directly
16.	Each apartment shall have access to two (2) separate, remote and approved metals. (Section 1010.1) from the apartment to the building extenor with no communications to other apartment units. (Section 1010.1)
17.	the state of the s
	(Over 3 stories in height requirements for the fating is two (2) hours, (2)
	The boiler shall be protected by enclosing with (1)hour fire rated construction including fire doors and ceiling, or by providing automatic
18.	The boiler shall be protected by enclosing with (1) mount in a final and a state of the City's
10	extinguishment. (Table 302.1.1) All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the City's All single and multiple station smoke detectors shall be approved type and Shall be installed in accordance with the provisions of the City's All single and multiple station smoke detectors shall be approved type and Shall be installed in accordance with the provisions of the City's All single and multiple station smoke detectors shall be approved type and shall be installed in accordance with the provisions of the City's All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the City's All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the City's All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the City's All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the City's All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the City's accordance with the city
19.	All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the All single and multiple station smoke detectors shall be Building Code Chapter 9, Section 920.3.2 (BOCA National Building Code/1996), and NFPA 101 Chapter 18 &19. (Smoke detectors shall be Building Code Chapter 9, Section 920.3.2 (BOCA National Building Code/1996), and NFPA 101 Chapter 18 &19.

installed and maintained at the following locations):

- In the immediate vicinity of bedrooms
- In all bedrooms
- In each story within a dwelling unit, including basements

In addition to the required AC primary power source, required smoke detectors in occupancies in Use Groups R-2, R-3 and I-1 shall receive power from a battery when the AC primary power source is interrupted. (Interconnection is required) Section 920.3.2.

- A portable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved agency and be of an approved type. (Section 921.0)
- 21. The Fire Alarm System shall maintained to NFPA #72 Standard.
- 22. The Sprinkler System shall maintained to NFPA #13 Standard.
- 23. All exit signs, lights and means of egress lighting shall be done in accordance with Chapter 10 Section & Subsections 1023.0 & 1024.0 of the City's Building Code. (The BOCA National Building Code/1996)
- 24. Section 25-135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a permit to excavate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year".
- 25. The builder of a facility to which Section 4594-C of the Maine State Human Rights Act Title 5 MRSA refers, shall obtain a certification from a design professional that the plans commencing construction of the facility, the builder shall submit the certification the Division of Inspection Services.
- 26. Ventilation shall meet the requirements of Chapter 12 Sections 1210.0 of the City's Building Code. (Crawl spaces & attics).
- 27. All electrical, plumbing and HVAC permits must be obtained by a Master Licensed holders of their trade. No closing in of walls until all electrical (min. 72 hours notice) and plumbing inspections have been done.
- 28. All requirements must be met before a final Certificate of Occupancy is issued.
- 29. All building elements shall meet the fastening schedule as per Table 2305.2 of the City's Building Code (the BOCA National Building Code/1996).
- Ventilation of spaces within a building shall be done in accordance with the City's Mechanical Code (The BOCA National Mechanical Code/1993). (Chapter M-16)
- 31. Please read and implement the attached Land Use Zoning report requirements.
- 32. Boring, cutting and notching shall be done in accordance with Sections 2305.4.4, 2305.5.1 and 2305.5.3 of the City's Building Code.
- 33. Glass and glazing shall meet the requirements of Chapter 24 of the building code.

· 54.						
				1 -	+_ 1	1 -
35.)	Please Note that I	ms permit	- is being	issued with	our regard	10
			enit pert		Sbeing rev	100)
36.	for use complian				~~~ 91. v	Q -
	The state of the s)			
/ 』	White the second				• *	
M	V /1-17/				•	


mue/Hopises, Building Inspector

Lt/McDougall, PFD Marge Schmuckal, Zoning Administrator

PSH 12-14-98

^{**}On the basis of plans submitted and conditions placed on these plans any deviations shall require a separate approval.

Concord Street New Construction for Sound Proofing. 10115 A Air+Heat System Storage. Storage. See Ferrised Plans to Scale

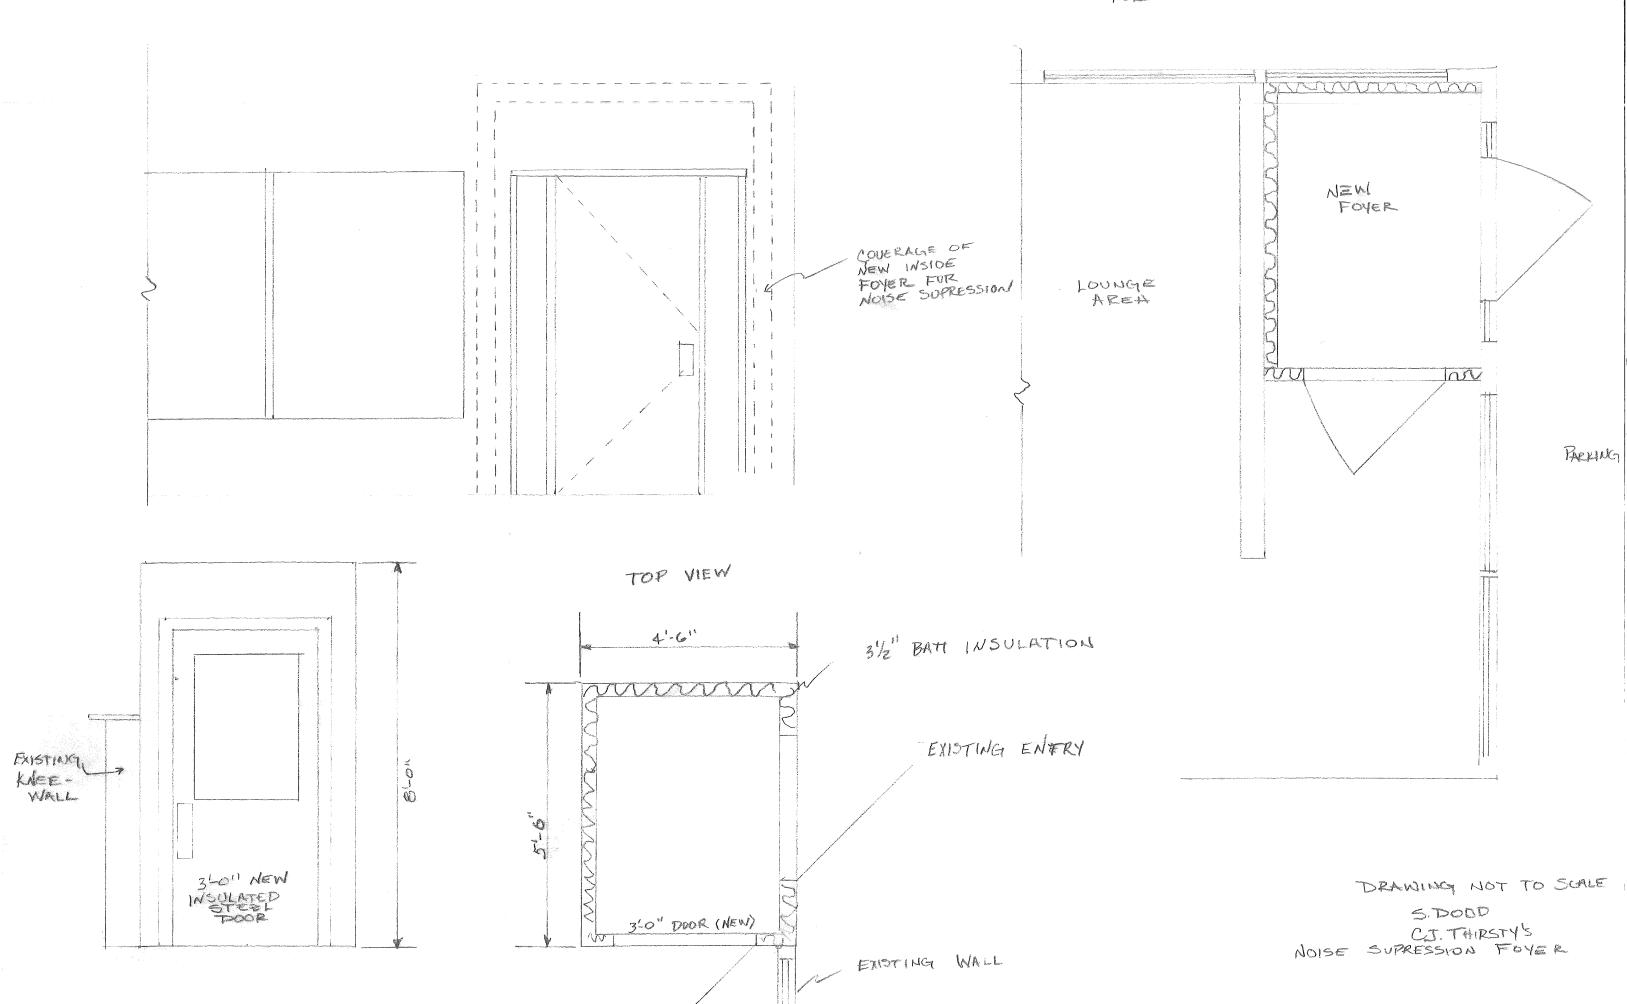

From:

Gary Wood

To:

JEG@Portland.CityHall, MBA@Portland.CityHall, MJN@...

Date:

Mon, Aug 9, 1999 5:17 PM

Subject:

C.J Thirstys - Forest Ave -Reply

yes, issue the permit for the sound related changes.