


LEGEND

GROSS HATCHED AREA INDICATES AREA OF NEW 2" THICK CONCRETE FLOOR W/VAPOUR BARRIER.

SQUARE HATCHED AREA INDICATES AREA OF EXISTING CONCRETE FLOOR.





BRICK COLLUMN.

RADON EVACUATION / PERIMETER DRAIN SYSTEM.

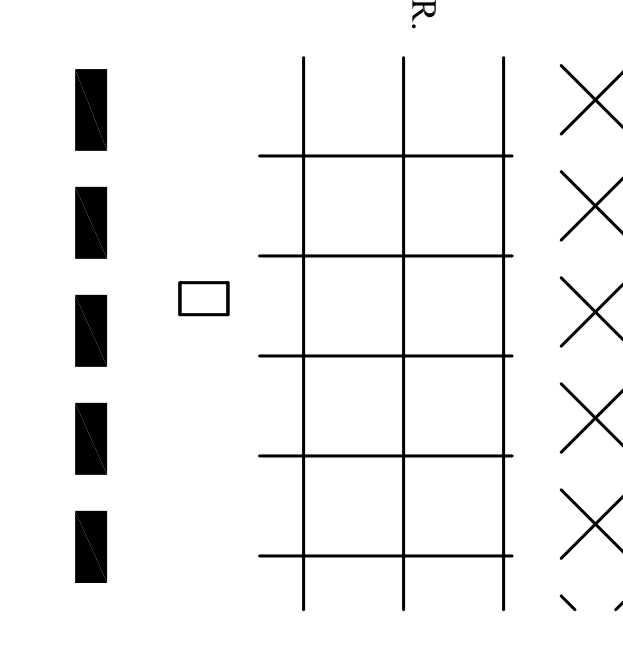


KEYWORD NOTES

- 1) SUMP.
- 2) RADON VENT - UP - MECHANICAL FAN ASSISTED.
- 3) NOT USED.
- 4) NOT USED.
- 5) NOT USED.
- 6) NEW WATER LINE - COORDINATE WITH MECHANICAL SUB-CONTRACTOR.
- 7) EXISTING WOOD POST - REPLACE PER DRAWING S-11 FIRST FLOOR FINISHING PLAN.
- 8) NEW SPRINKLER LINE - COORDINATE WITH SPRINKLER SUB-CONTRACTOR.
- 9) MECH. RM. 008 - 1 HOUR RATED CEILING & WALL CONSTRUCTION - SEE DRAWING A-13 FOR CEILING & WALL TYPES. 1 HOUR RATED DOOR/FRAME ASSEMBLY. STOREROOM FUNCTION.
- 10) APPROXIMATE LOCATION OF SPRINKLER RISER DOWN TO THE WITH SPRINKLER SUB-CONTRACTOR.
- 11) ELECTRICAL SERVICE PANELS - COORDINATE WITH ELECTRICAL SUB-CONTRACTOR.
- 12) NOT USED.
- 13) NOT USED.
- 14) DOMESTIC WATER SERVICE ENTRANCE METER - COORDINATE WITH MECHANICAL SUB-CONTRACTOR.
- 15) SEWER OUT-GO - COORDINATE WITH MECHANICAL SUB-CONTRACTOR.
- 16) GAS LINE - COORDINATE WITH MECHANICAL SUB-CONTRACTOR.
- 17) 2" THICK CONCRETE SLAB W/VAPOUR BARRIER.
- 18) STRUCTURAL FILL.
- 19) INFILL.
- 20) UNDISTURBED SOIL.
- 21) 8" THICK CMU WALL.
- 22) EXISTING BRICK COLLUMN - VARIES IN SIZE. (TYPICAL)
- 23) EXISTING STONE FOOTING - VARIES IN SIZE. (TYPICAL)
- 24) EXISTING CONCRETE FOOTING - VARIES IN SIZE. (TYPICAL)
- 25) VARIOUS IN SIZES (TYPICAL) BACK CONCRETED FROM BRICKS AS SHOWN. (TYPICAL)

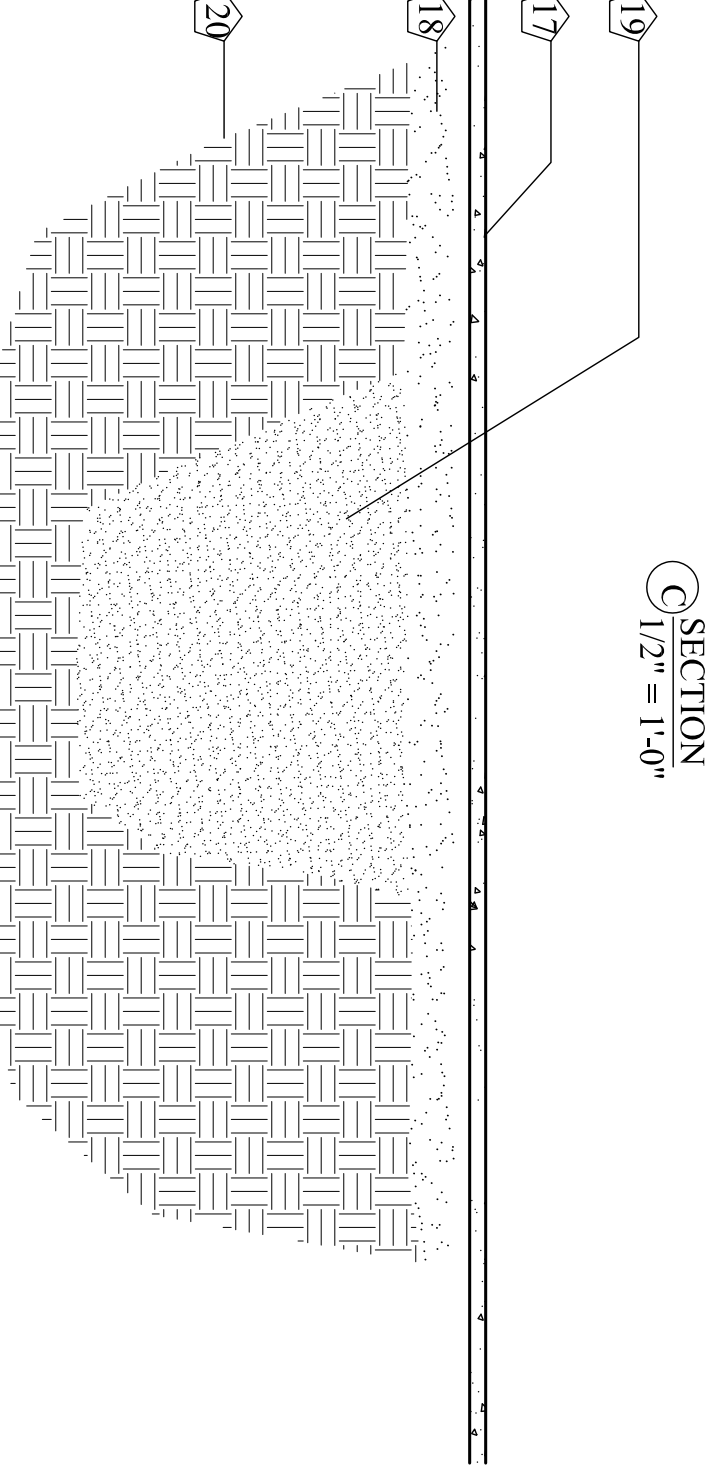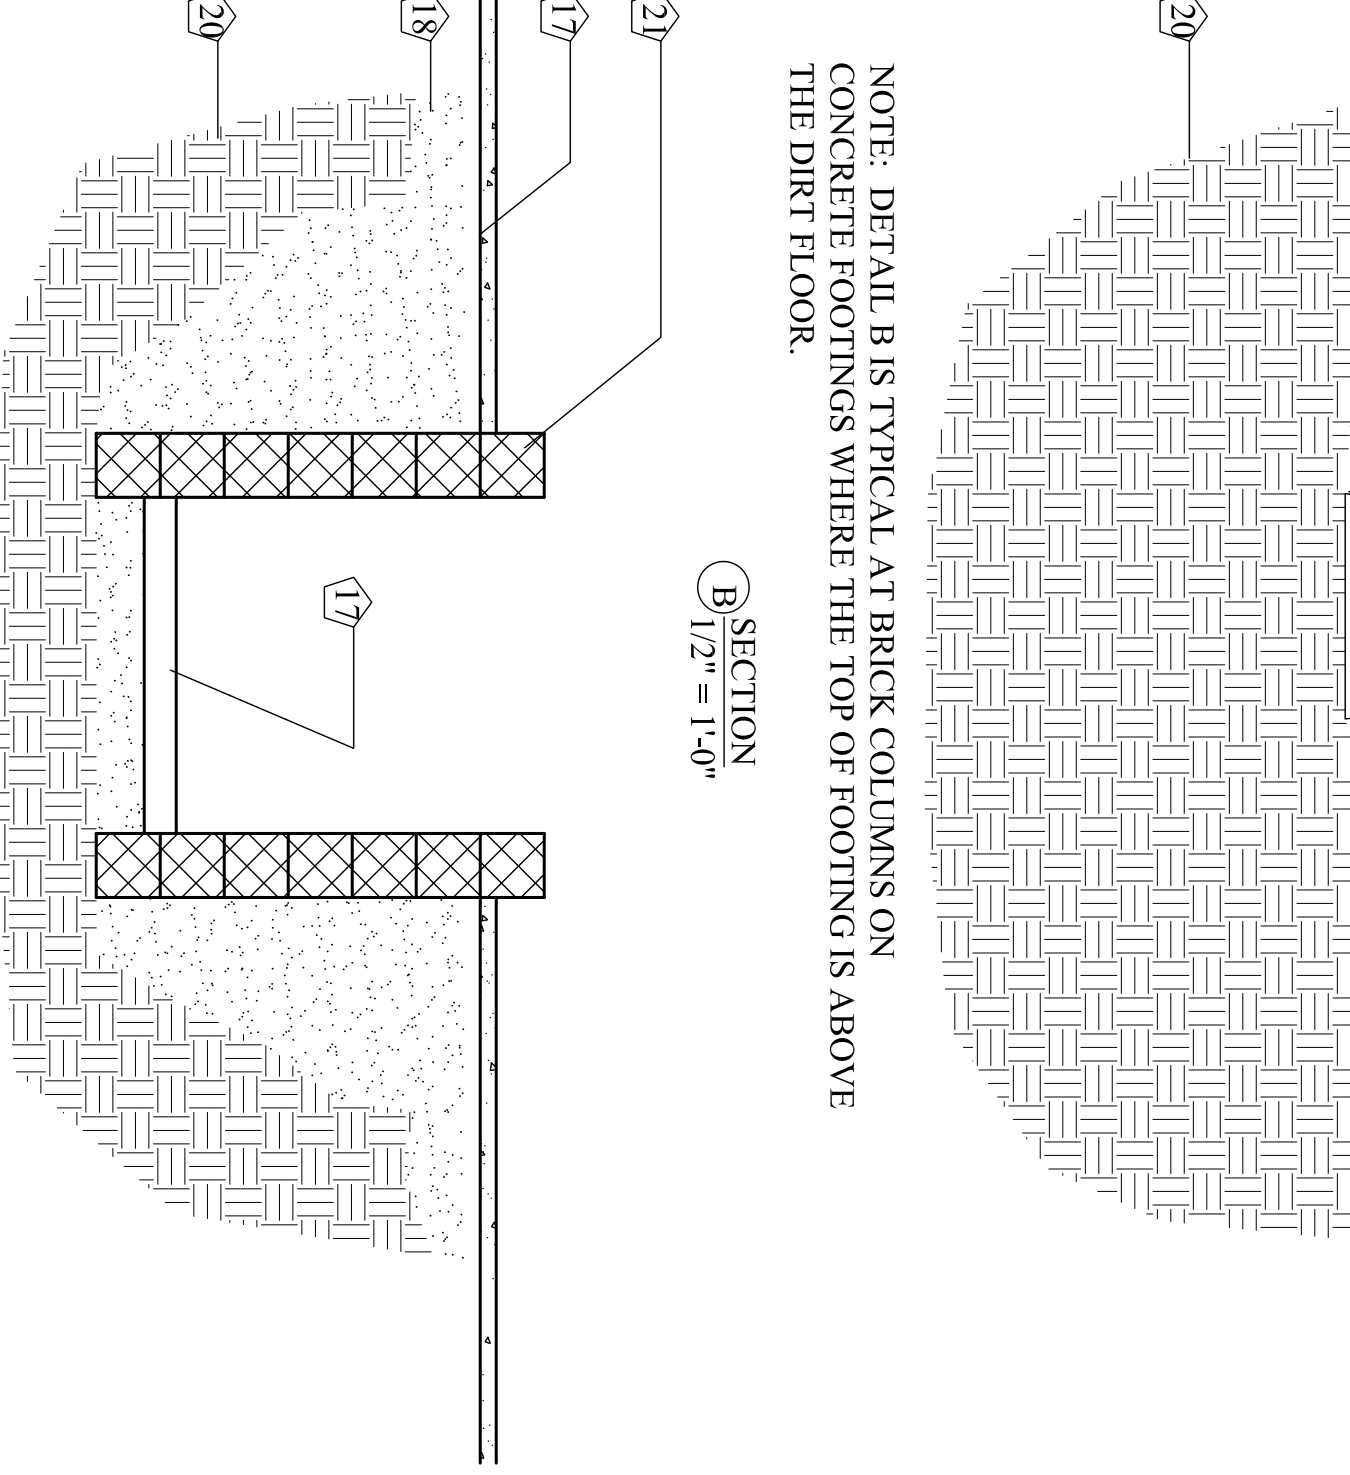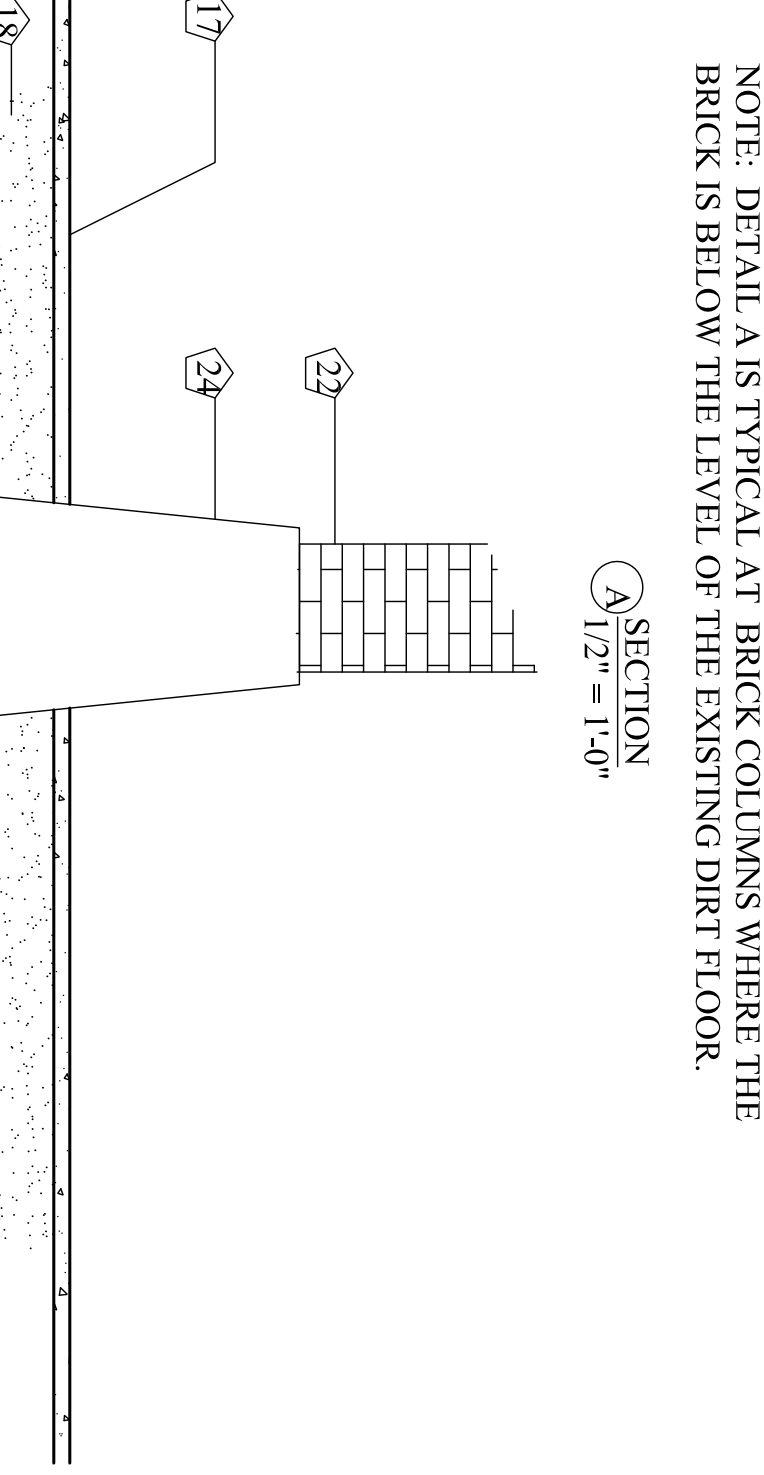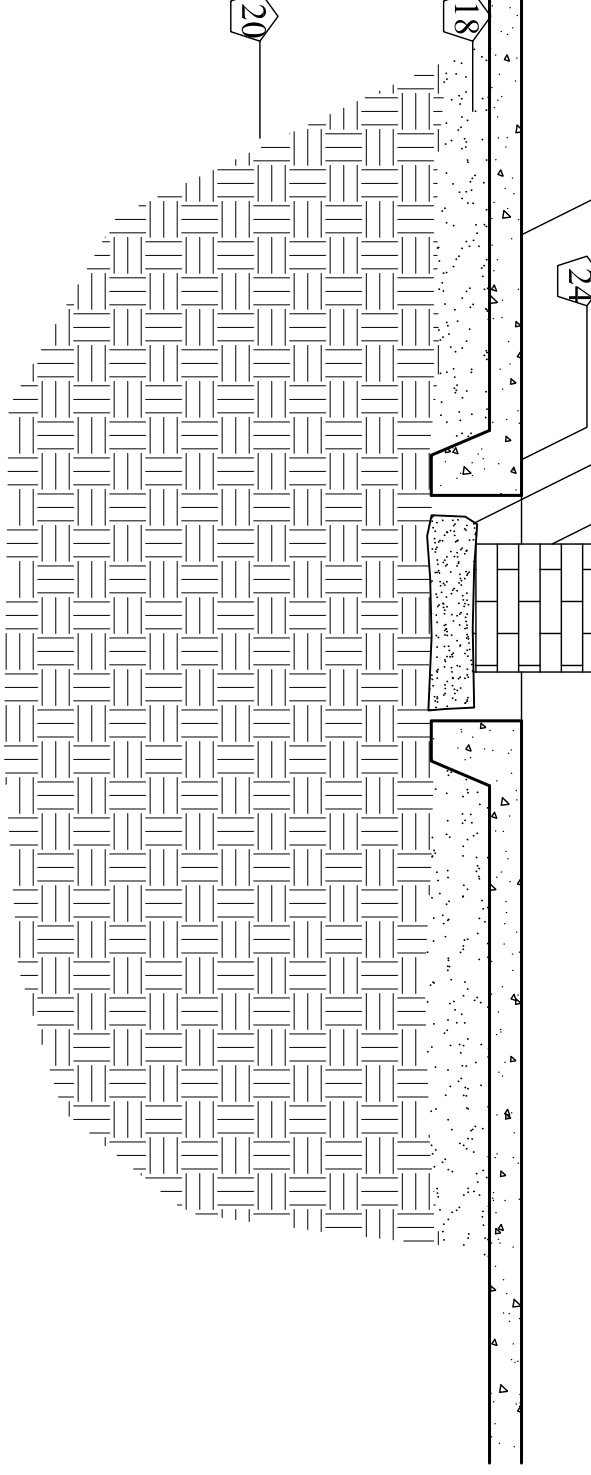

1) BASEMENT PLAN
1/4" = 1'-0"

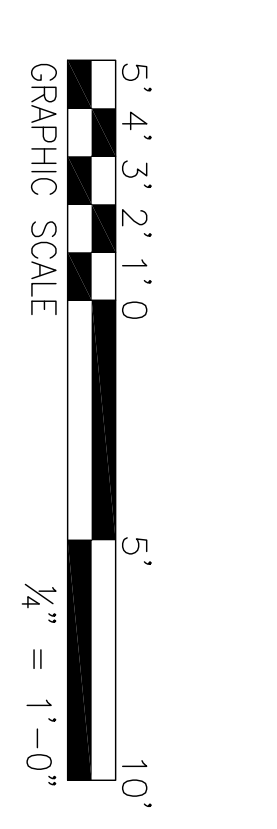

A) DETAIL
1/2" = 1'-0"

