
ESURG A4		PERMIT ISSUED							
		I FOR PERMIT WER EQUIPMENT	MAR 2 0 cons CITYOT PATOLOND						
To the INSPECTOR OF BUILDINGS, PORTLAND, ME. The undersigned hereby applies for a permit to install the following heating, cooking or power equipment in accordance with the Laws & Maine, the Building Code of the City of Portland, and the following specifications: Location / CBL 27 Leland St. /3.5 /2 Location / CBL 27 Leland St. Use of Building resident in Date 3 17-06 Name and address of owner of appliance Kenneth Jones									
Installer's name and address Dead River Company 73 Pleasant Hill Rd-Scarborough ME Telephone 883-9515									
Location of appliice: Basement Attic	FloorRoof	Type of Chimney: Masonry Lined Factory built 							
Type of Fuel:	Oil 🗖 Solid	 Metal Factory Built U.L. Listing Direct Vent 	g #						
installation instructions?	accordance with the manufacture's	Type Type of Fuel Tank Size of Tank 240 (f	 replacement						
 Solid Fuel # Oil # <u>MS 30</u> Gas # 	#	Number of Tanks Distance from Tank to Center of Cost of Work: <u>\$_1(000.</u> Permit Fee: <u>\$39.0</u>	00						
Fire: Ele.:	proved	Approved with See attached letter							
	rad Rues Co. by Jain	Inspector's Signature	Date Approved						



Limited Partnership

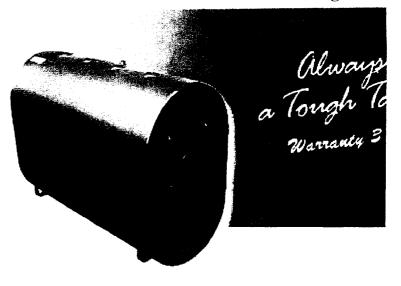

UL 80 Domestic Oil Tanks

#PRODUIT	MODELS	C	IMENSIO	NS	GAUGE	WEIGH
		н	w	L		
2090	120 us gak vertical	47"	23"	30"	12 ga	165 lb
2095	120 us gals horizontal	23" 47" 30"		12 ga	165 lb	
2080	138 us gals vertical	44"	27	30"	12 ga	175 lb
2085	138 us gals horizontal	8 us gals horizontal 27"		30"	12 ga	175 lb
2070	220 us gals vert./stubbies	44"	27"	48"	12 ga	240 lb
2075	220 us gals horizontal	27"	44"	48"	12 ga	2 40 ib
2020	240 us gals narrow/vert .	47" 23"		60"	12 ga	260 lb
2025	240 us gais narrow/horiz.	23" 47" 60"		60"	12 ga	260 lb
2040	275 us gals vertical	44"	27"	60"	12 ga	280 lb
2045	275 us gals horizontal	27*	44"	60"	12 ga	280 lb
2050	330 us gak vertical	44"	27"	72"	12 ga	320 lb
2055	330 us aak horizontal	27"	44"	72"	12 ga	320 lb

210 210 121 121 2.0 121



TECHNICAL SPECIFICATIONS

- o Steel ASTM A-569
- Female openings NPT
- o Tested at pressure 5 to 7 PSIG
- UI 80 label
- o Operation at atmospheric pressure only
- Also available UL 142 labeled on 275 & 33 gals (including a 3" diameter emergency va opening). Other models on request only.

rage 2 or 2

installation and maintenance guidelines for aboveground domestic fuel oil tanks (PDF

OUTSIDE FINISH

- o Preparation: Washed and phosphated
- Electrostatic powder paint "black or gray".

GENERAL CHARACTERISTICS

- Always a tough tank
- o Welded lap joint: the strongest one
- Ergonomic handle on each head for easy handling

NEW PRODUCTS:

• 275 gals. UL 80 labelled 10 gauge shell &

IN REFERENCE TO: UL LISTING

UL Listing: Requires outlet opening of 1/2" minir to be located underneath the tank only. Requires openings to be 2" minimum diameter. Tanks whic not meet above requirements cannot be UL 80 la

NOTICE: N.F.P.A. Codes, UL and Granby Steel Tanks require t these tanks be tested at job *site* before being put in service. To te tank, apply internal air pressure of not less than 3 PSIG or more t PSIG and soap all searns and welded areas. Warning: Over pressurization may cause tank to fail.



2 C

121

5.0

12

HORIZONTAL MODEL

20

275 US GALS

121

210