

Fisher 167 High St.

JELD-WEN
WINDOWS & DOORS

STEEL
Entry Door Systems



90-MINUTE FIRE RATED DOORS


RELIABILITY for real life®

... those words mean everything when the safety of your home and family are at stake.

JELD-WEN Fire Door Systems are engineered to conform to either 90-minute or 20-minute fire codes.

90-MINUTE RATED STEEL FIRE DOOR SYSTEMS

6'-8" DOORS

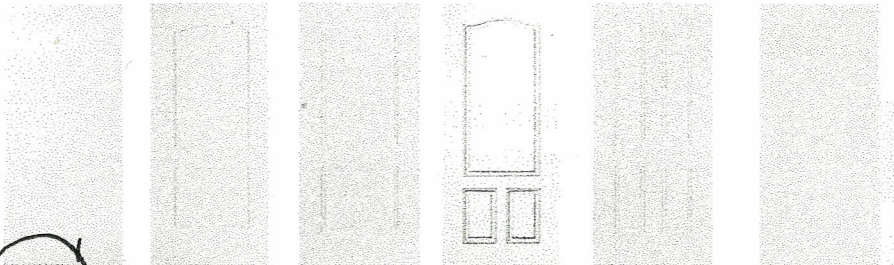


FLUSH	2-PANEL CONTINENTAL	2-PANEL CAMBRIDGE	3-PANEL ARCHTOP	4-PANEL	6-PANEL
Door 2'6" 2'8" 3'0"	Door 2'8" 2'10" 3'0"	Door 2'8" 2'10" 3'0"	Door 2'8" 2'10" 3'0"	Door 2'6" 2'8" 2'10" 3'0"	Door 2'6" 2'8" 2'10" 3'0"
90C-100	90C-20	90C-21	90C-30	90G-40	90G-60

Unmatched adjustability, ease of installation and reliability distinguish the Fire Frame kerf steel door frame. Designed and manufactured for a full range of residential and commercial installations in wood or steel stud construction, Fire Frame features a full 1" of adjustability to accommodate most variations in wall construction. Extensive engineering and thorough testing enable this frame to meet the most stringent code requirements including the proper closing and latching specified for a full 90-minute fire rating.

6'-8" DOORS



8-PANEL	9-PANEL
Door 2'8" 2'10" 3'0"	Door 2'8" 2'10" 3'0"
90C-80	90C-90

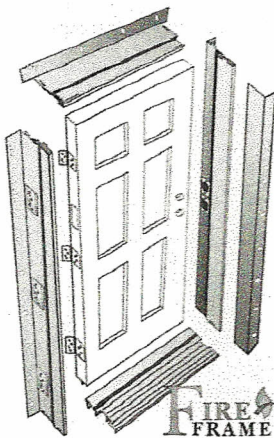

FIRE LABELS

90 Minute Fire Rating up to 3'-0" x 8'-0" Single.

STRUCTURAL PERFORMANCE AND IMPACT RATING

Design pressure ratings available for compliance with national, state and local wind load and/or missile requirements. Product approval under the Miami-Dade BCCO NOA or Intertek-testing Services/Warnock Hersey® programs.

DOOR SELECTION

Fire Frame is available in either right or left hand, both inswing and outswing for use with any entry door. Available in 6'8", 7'0" and 8'0" heights. Frame sizes from 4 1/2" thru 10 1/2" based on 1" increments.