
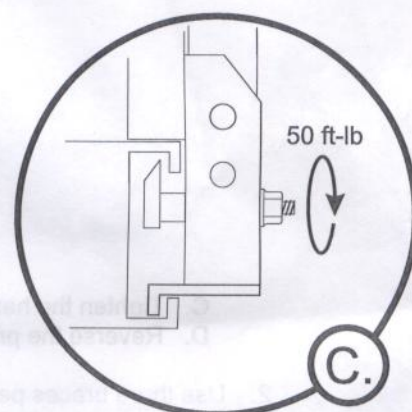
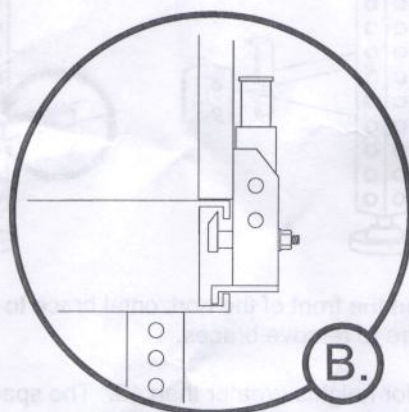


Step 9 Guard Rails

Each guard rail section has two T-Locks to secure the guard rail to the Multi-Stage. To install guard rail:

- Set the lower lip of the guard rail lock inside the C-Channel along the perimeter of the Multi-Stage.
- Swing the guard rail up until the T-Lock is fully seated within the C-Channel of the stage. Press down on plunger if necessary to seat T-Lock.
- Tighten the hex nut on each lock to 50 ft-lb.
- To remove guard rail, loosen hex nut and depress plunger to release T-Lock.

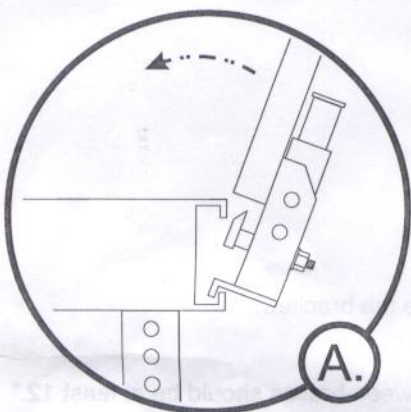

⚠ WARNING

Failure to correctly install guard rails could result in serious injury or death. Verify that each T-Lock is fully seated inside the Multi-Stage, as shown in Figure B, and guard rail is secure. T-Lock will click audibly when it is installed.

Section 1012 of the International Building Code and Section 1008.5.7 of the Uniform Building Code require the use of guard rails with vertical posts no greater than 4" apart when the stage height exceeds 30."

