

PROVIDE 10 MIL POLY VAPOR BARRIER ON POOL SIDE OF HALLS AND CEILING. SEAL ALL JOINTS, PENETRATIONS AND SEAMS. SEE ADDITIONAL NOTES ON DWG. A22.

PROVIDE WATERPROOFING MEMBRANE AT THE BASE OF ALL POOL ROOM WALLS-SEE DETAIL 2/ALL

ALL COLUMNS AND STRUCTURAL BRACING AT FIRST FLOOR LEVEL TO BE PROTECTED FOR THEIR FULL LENGTHS AS DETAILED ON DWG. A01 FOR 3 HR. FIRE RESISTANCE RATINGS.

INTERIOR WALLS TO BE WALL TYPE 2 UNLESS NOTED OTHERWISE.

HANDRAILS AT BOTH SIDES OF RAMP AT 36" ABOVE FLOOR. OPEN SIDE TO HAVE 4" HIGH.


MAX. SLOPE 1/12

REVISION SCHEDULE	REVISION DESCRIPTION
DATE: 05-21-13	ADDED DR. HIESA AT POOL MECH/DELETED DR. #1F
DATE: 06-03-13	ADDED PLAN SECTION MARKS 13 & 14/AT
DATE: 06-04-13	ADDED NOTE RE: POOL WALL DTL 2/ALL. ADDED NOTES AT RAMP.

**COPECEE**  
 CONSTRUCTION CORPORATION  
 11 CORPORATE DRIVE, BELMONT NH 03220  
 PHONE (603) 327-9090 FAX (603) 327-9191

# FIRST FLOOR PLAN

PROJECT: COMMERCIAL & MAPLE STREET  
 MIXED USE DEVELOPMENT  
 PORTLAND, ME

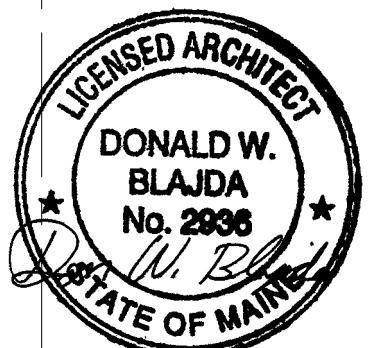

**1 FIRST FLOOR PLAN**  
 1/8" = 1'-0"

DATE: 05-09-13
SCALE: SEE PLAN
DRAWN BY: KPH
<b>A1</b>
SHEET: