


Project Name PORTLAND ME - MARRIOTT COURTYARD - 321 COMMERCIAL STREET - CONSTRUCTION MATERIALS TESTING
 Client J.B. BROWN & SONS
 Material Type STRUCTURAL FILL
 Material Source GSG - PHINNEY PIT


Project Number 08-0494.2
 Lab ID 16652G
 Date Received 3/27/2013
 Date Completed 3/28/2013
 Tested By JUSTIN BISSON

<u>STANDARD</u> <u>DESIGNATION (mm/um)</u>	<u>SIEVE SIZE</u>	<u>AMOUNT PASSING (%)</u>	<u>STRUCTURAL FILL</u> <u>SPECIFICATIONS (%)</u>
150 mm	6"	100	
125 mm	5"	100	
100 mm	4"	100	100
75 mm	3"	100	90 - 100
50 mm	2"	93	
38.1 mm	1-1/2"	88	
25.0 mm	1"	80	
19.0 mm	3/4"	77	
12.5 mm	1/2"	71	
6.3 mm	1/4"	65	25 - 90
4.75 mm	No. 4	62	
2.00 mm	No. 10	54	
850 um	No. 20	38	
425 um	No. 40	20	0 - 30
250 um	No. 60	11	
150 um	No. 100	6	
75 um	No. 200	4.2	0.0 - 5.0

SAMPLE MEETS SPECIFICATION

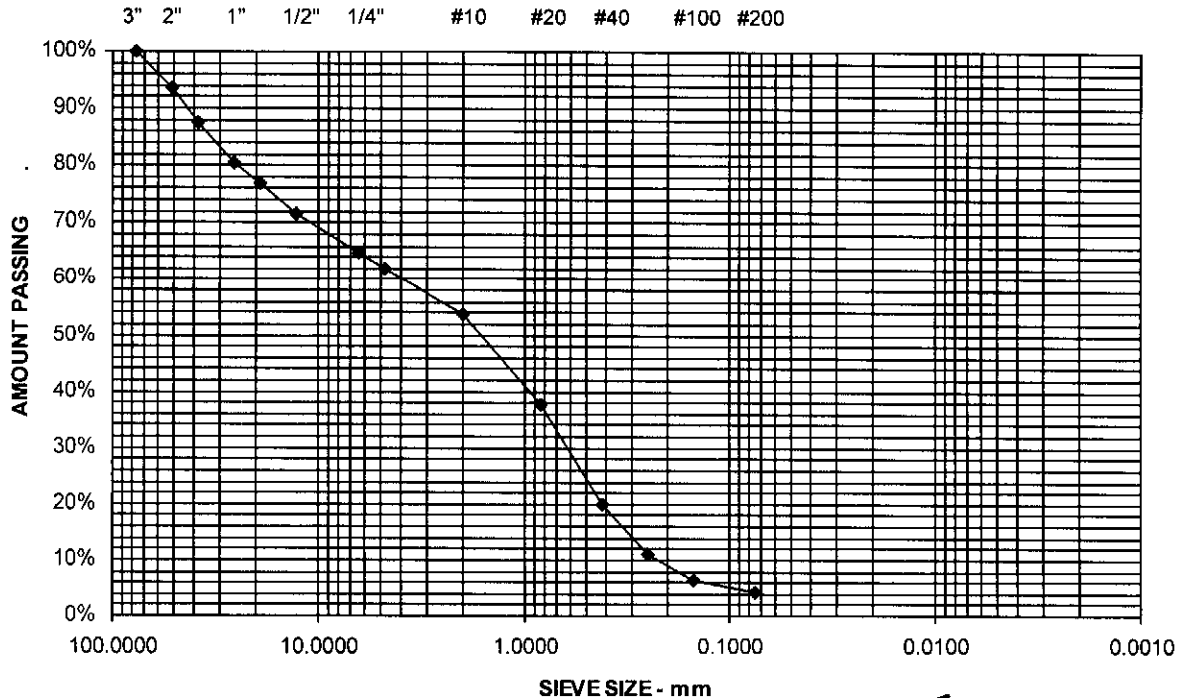

Comments

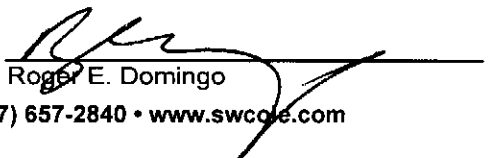
 Roger E. Domingo